
Multilayer Optical Film [Model: C40D]

Function

The brightness of LCD is enhanced with the polarization recycling function.

Structure

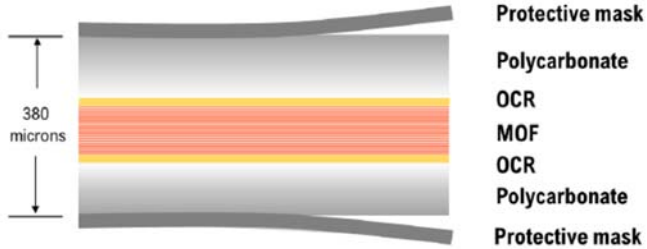

Model Name & Size

Model name	Thickness	Size
C40D	380um +/-40um	By request

Physical Characteristics

Project	Unit	Result
Coefficient of Thermal Expansion (25°C ~95°C)	um/m. °C	MD: 86.25 TD:78.21
Heat Shrinkage (95°C , 30 min)	(%)	MD: 0.02% TD: -0.01%

Optical Characteristics

Item	Specification	Note
Gain of brightness	≥1.6	LCD Center Area
Color shift, @0 °	Δx ≤0.01 Δy ≤0.01	LCD Center Area
Transmittance (%)	45±5	
Haze (%)	75±10	

Reliability Testing Specification

Test Item	T (°C)	RH (%)	Time	Judgement
Heat Resistance	95°C	Room Humidity	1000 hrs	1. Equal to or greater than 80% of initial value. 2. DE<2.0. Difference from initial value, ΔE*, equal to or less than 2.0. 3. No Significant appearance change by naked eye observation.
Cold Resistance	-40°C	Room Humidity	1000 hrs	
Humidity Resistance	65°C	93%RH	1000 hrs	
Thermal Shock	-40°C ~ 85°C	Room Humidity	300 cycles 0.5 hr/cycle	

*The above figures are all representative data of testing, and are not subject to any guarantee or warranty.

12F., No.86-2, Yiwen 1st St., Taoyuan Dist., Taoyuan City 33045, Taiwan
TEL: +886 3 3160666 ; FAX: +886 3 3160655