

## Disassembly Run 3 – January 13<sup>th</sup>, 2025

Production Order: \_\_\_\_\_







Quality: Hail Damage (HD)


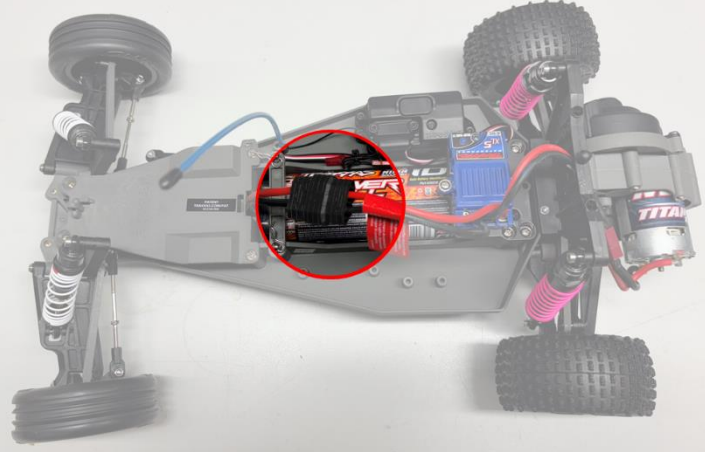

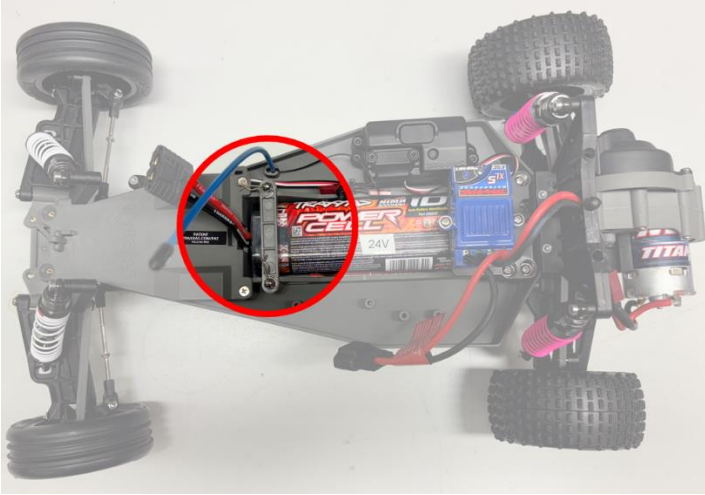

Kinexon: Hochwertiges Altfahrzeug








Delivery time: \_\_\_\_\_


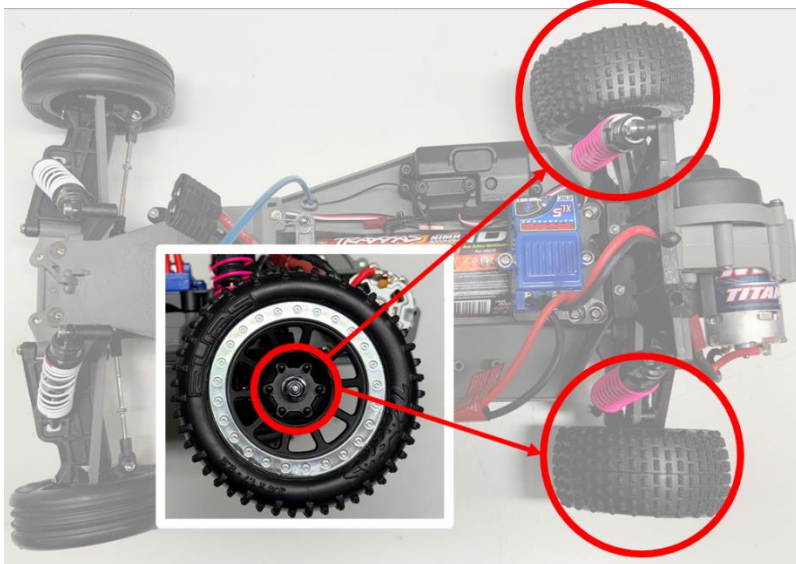




Other Comments:


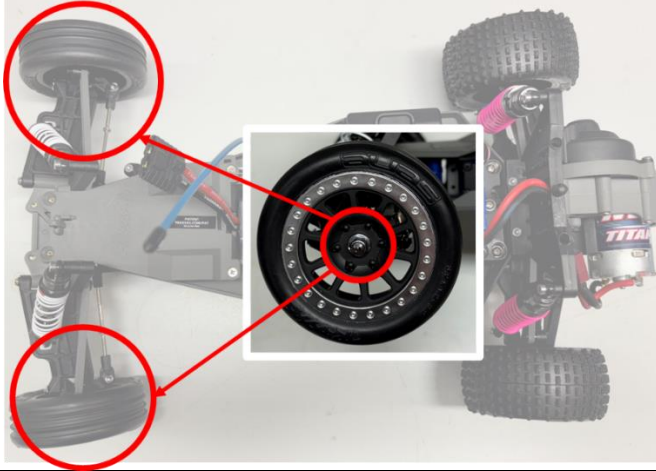







--


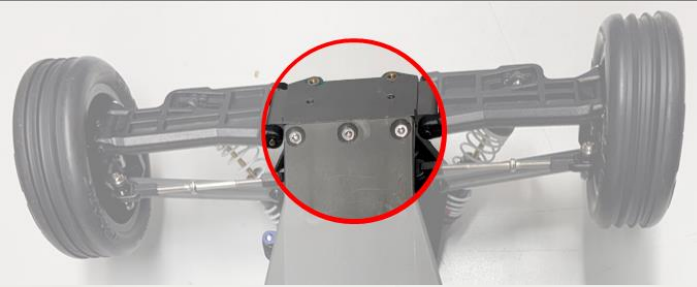

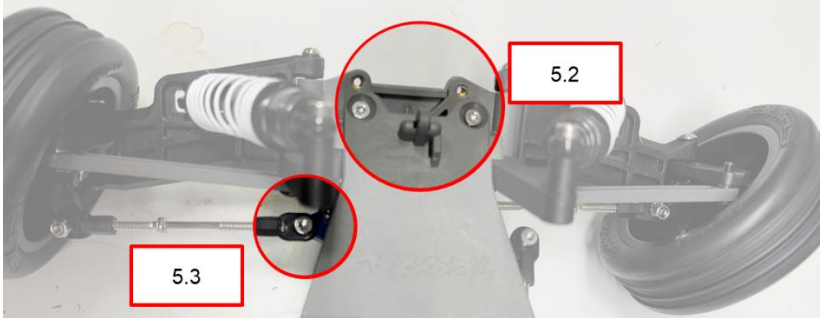





Step	Tool	Task	Image	Comment
WS 1 – Step 1: Remove body and spoiler → to warehouse: Body & Spoiler (BOSP)				
1.1		Loose splints (2x)		
1.2	<b>Remove BOSP</b>	Remove body (1x) Remove spoiler (1x)		
1.3	 <b>BOSP</b>	<b>Connect BOSP</b> Body (1x) & spoiler (1x)		
1.4	 <b>BOSP</b>	Body & Spoiler → Warehouse		






Step	Tool	Task	Image	Comment
WS 1 – Step 2: Remove battery → to warehouse: Battery (BAT)				
2.1		Disconnect battery cable		
2.2		Loose splints (2x) Loose cable clip (1x)		
2.3	Remove BAT	Remove battery		

Step	Tool	Task	Image	Comment
2.4	 BAT	<b>Connect BAT</b> Battery		
2.5	 BAT	Battery → Warehouse		
2.6	 CREW	Keep initial tracker at <b>Chassis, Remaining</b> <b>systems, Engine, and</b> <b>Wheels</b>	  No connection needed!	
2.7	 CREW	Remaining parts (CREW) → Buffer B2 (Workstation 2)		


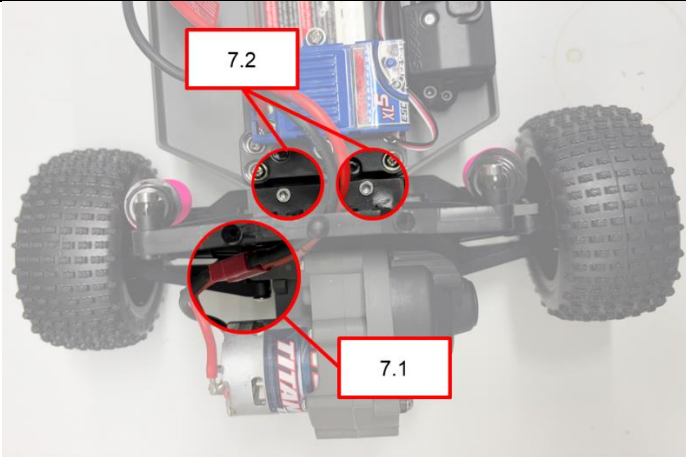



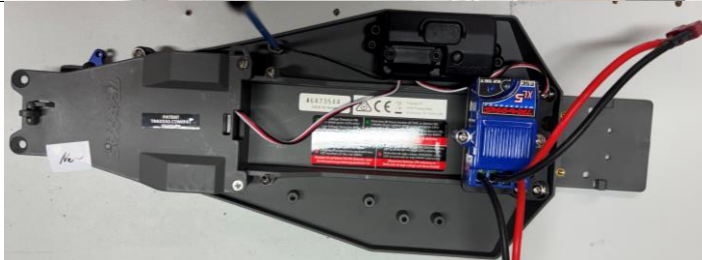
Step	Tool	Task	Image	Comment
<b>WS 2 – Step 3: Remove rear tires → to warehouse: Rear Tires (RT)</b>				
3.1		Loose cap nuts (2x)		
3.2	<b>Remove RT (2x)</b>	Remove rear tires (2x)		
3.3	 <b>RT (2x)</b>	<b>Connect RT</b> Rear tires (2x)		
3.4	 <b>RT (2x)</b>	Rear tires (2x) → Warehouse		







Step	Tool	Task	Image	Comment
<b>WS 2 – Step 4: Remove front tires → to warehouse: Front Tires (FT)</b>				
4.1		Loose cap nuts (2x)		
4.2	<b>Remove FT (2x)</b>	Remove front tires (2x)		
4.3	 <b>FT (2x)</b>	<b>Connect FT</b> Front tires (2x)		
4.4	 <b>FT (2x)</b>	Front tires (2x) → Warehouse		
4.5	 <b>CRE</b>	Keep initial tracker at <b>Chassis, Remaining systems, and Engine</b>	 <b>No connection needed!</b>	
4.6	 <b>CRE</b>	Remaining parts (CRE) → Buffer B3 (Workstation 3)		

Step	Tool	Task	Image	Comment
WS 3 – Step 5: Remove front axis with shock absorbers → to warehouse: None				
5.1	 T10	Loose torx screws at bottom side (3x)		
5.2	 T10	Loose torx screws at top side (2x)		
5.3	 T10	Loose torx screws of steering (2x)		
5.4	<b>Remove FAXS</b>	Remove front axis with shock absorbers (1x)		
5.5	 <b>FAXS</b>	<b>Connect FAXS</b> Front axis with shock absorbers	 <b>FAXS</b>	
5.6	 <b>FAXS</b>	Front axis with shock absorbers → Buffer B5 (Workstation 5) Attach Copy of PO!		

Step	Tool	Task	Image	Comment
5.7	  CRAXS	Keep initial tracker at Chassis with Rear <b>A</b> xis, and Shock absorbers	  No connection needed!	
5.8	 CRAXS	Remaining parts (CRAXS) <a href="#">→ Buffer B4 (Workstation 4)</a>		



Step	Tool	Task	Image	Comment
WS 4 – Step 7: Remove rear axis with shock absorbers → to warehouse: Chassis (CHS)				
7.1		Disconnect motor cable		
7.2	 T10	Loose torx screws at top side (2x)		
7.3	 T10	Loose torx screws at bottom side (4x)		
7.4	<b>Remove CHS</b>	Remove chassis (1x)		

Step	Tool	Task	Image	Comment
7.5	 CHS	Connect chassis		
7.6	 CHS	Chassis → Warehouse		
7.7	 RAXS	Keep initial tracker at <b>Rear Axis</b> with Shock absorbers	 No connection needed!	
7.8	 RAXS	Remaining parts (RAXS) → Buffer B5 (Workstation 5)		

Step	Tool	Task	Image	Comment
WS 5 – Step 8: Remove big shock absorbers → to warehouse: Big Shock Absorbers (BSA) + Rear Axis (RAX)				
8.1	 T7	Loose bottom torx screws (2x)		
8.2	 Hex 2.5	Loose top hex screws (2x)		
8.3	<b>Remove BSA (2x)</b>	Remove shock absorbers (2x)		
8.4	 BSA (2x)	Connect big shock absorbers (2x)		
8.5	 <b>BSA (2x)</b>	Big shock absorbers (2x) → Warehouse		
8.6	 RAX	Keep initial tracker at rear axis	  No connection needed!	
8.7		Rear axis → Warehouse		

## Disassembly Run 3 – January 13<sup>th</sup>, 2025

Production Order: \_\_\_\_\_


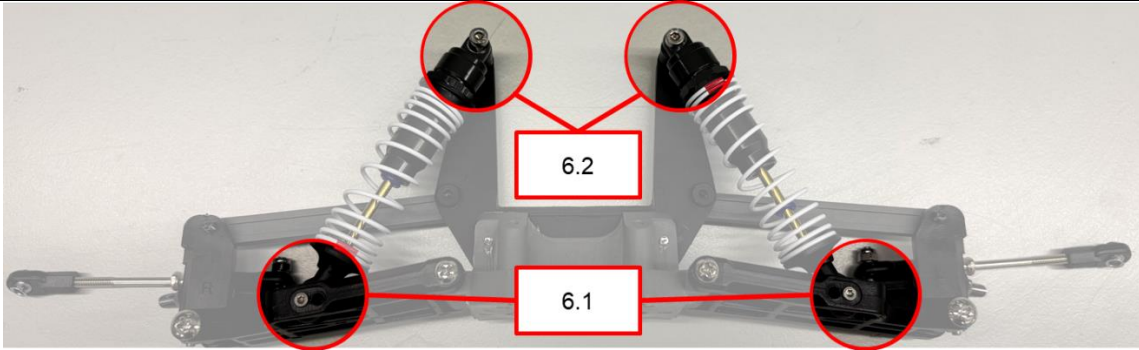








Quality: Hail Damage (HD)

Kinexon: Hochwertiges Altfahrzeug

Delivery time: \_\_\_\_\_

Other Comments:

PO – Copy

Step	Tool	Task	Image	Comment
<b>WS 5 – Step 6: Remove small shock absorbers → to warehouse: Small Shock Absorbers (SSA) + Front Axis (FAX)</b>				
6.1	 T7	Loose bottom torx screws (2x)		
6.2	 Hex 2.5	Loose top hex screws (2x)		
6.3	<b>Remove SSA (2x)</b>	Remove small shock absorbers (2x)		
6.4	 <b>SSA (2x)</b>	Connect small shock absorbers (2x)	 SSA	
6.5	 <b>SSA</b>	Small shock absorbers (2x) → Warehouse		
6.6	 <b>FAX</b>	Keep initial tracker at front axis	 No connection needed!	
6.7	 <b>FAX</b>	Front axis → Warehouse		

