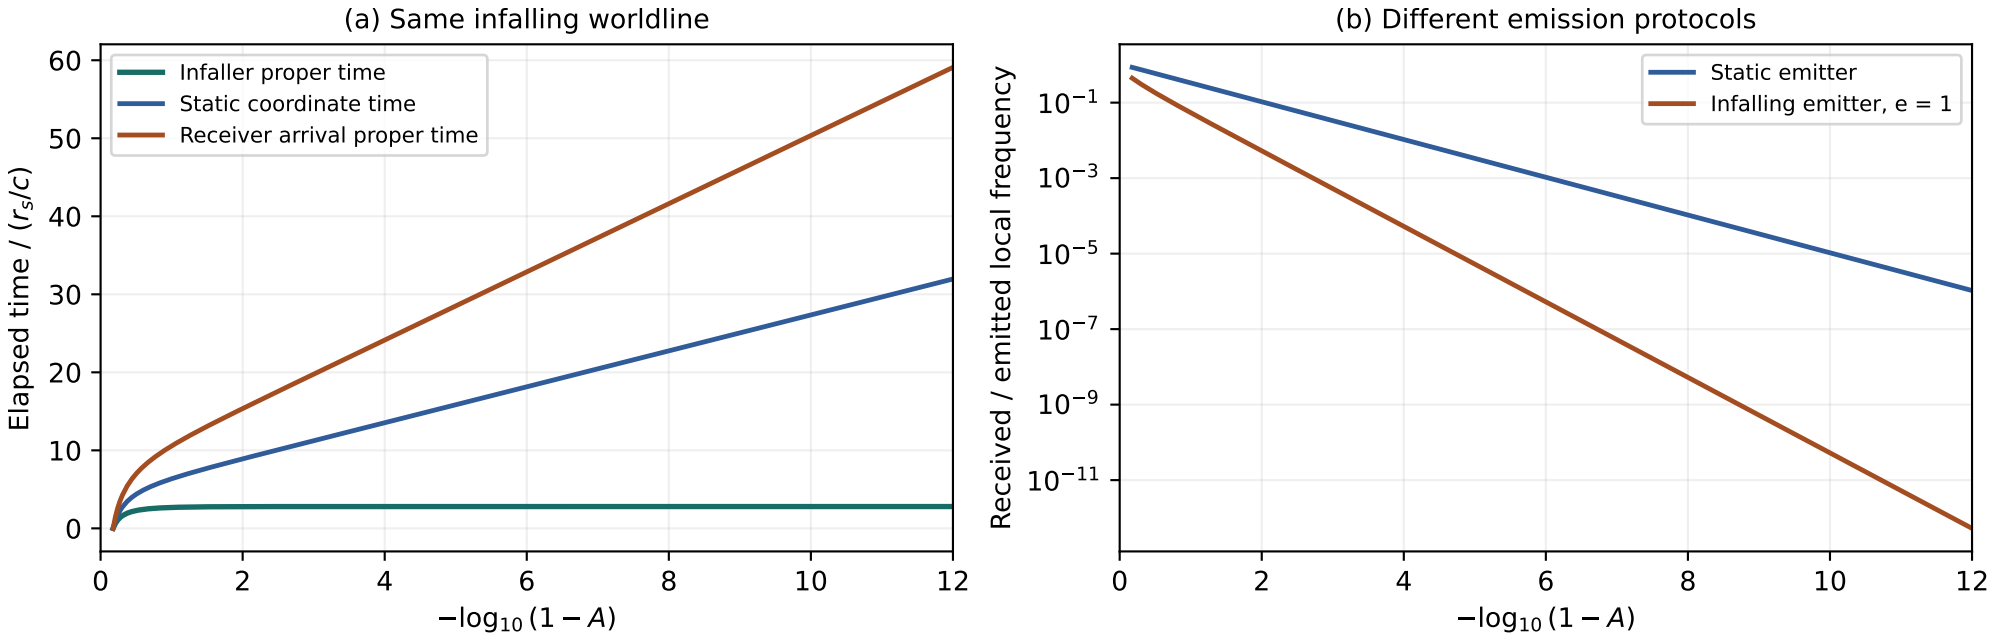
(a) Same infalling worldline
Infaller proper time
Static coordinate time
Receiver arrival proper time
Elapsed time / (r_s/c)
$-\log_{10}(1-A)$
(b) Different emission protocols
Static emitter
Infalling emitter, e = 1
Received / emitted local frequency
$-\log_{10}(1-A)$