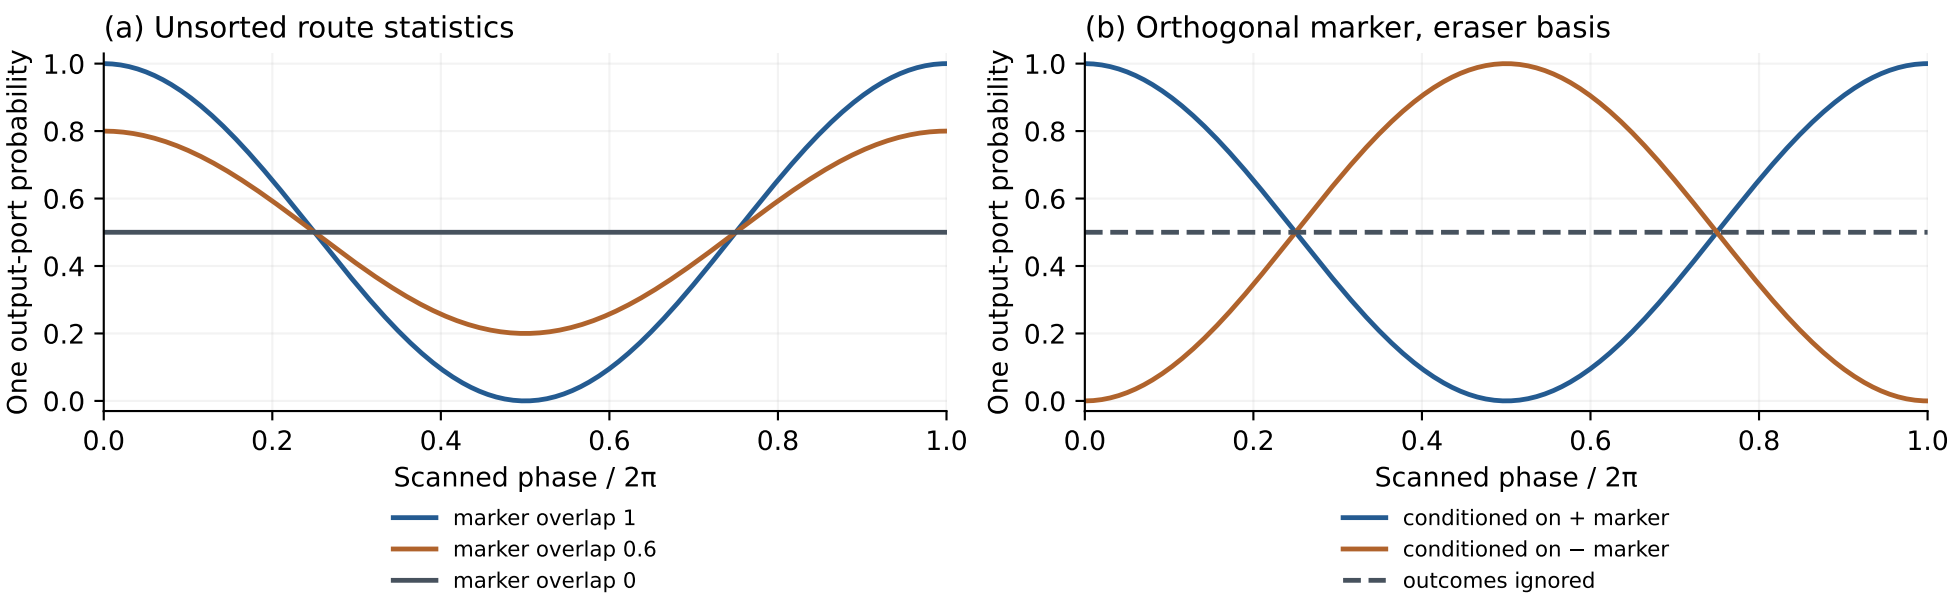
(a) Unsorted route statistics
One output-port probability
1.0
0.8
0.6
0.4
0.2
0.0
0.0
0.2
0.4
0.6
0.8
1.0
Scanned phase / 2π
marker overlap 1
marker overlap 0.6
marker overlap 0
(b) Orthogonal marker, eraser basis
One output-port probability
Scanned phase / 2π
conditioned on + marker
conditioned on − marker
outcomes ignored