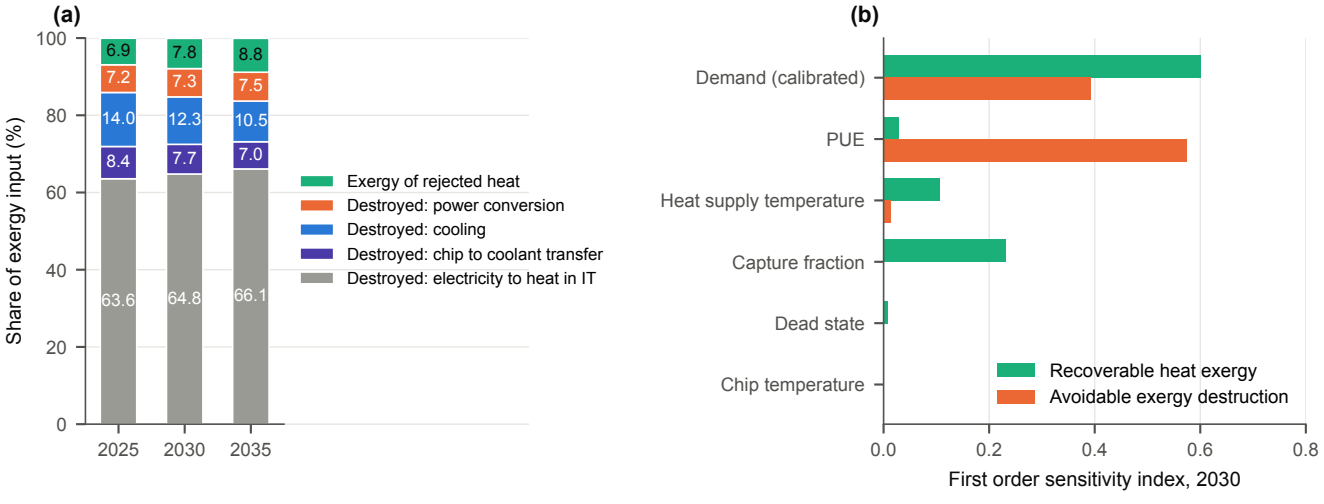
(a)
Share of exergy input (%)
100
80
60
40
20
0
6.9
7.2
14.0
8.4
63.6
7.8
7.3
12.3
7.7
64.8
8.8
7.5
10.5
7.0
66.1
2025
2030
2035
Exergy of rejected heat
Destroyed: power conversion
Destroyed: cooling
Destroyed: chip to coolant transfer
Destroyed: electricity to heat in IT
(b)
Demand (calibrated)
PUE
Heat supply temperature
Capture fraction
Dead state
Chip temperature
Recoverable heat exergy
Avoidable exergy destruction
0.0
0.2
0.4
0.6
0.8
First order sensitivity index, 2030