

YK-S01




Item	1m or 3m (Displayed in 10 cm increments)
Direction Pattern	Ultrasonic radiation
Detection Angle	Maximum Horizontal/vertical angle $\pm 60^\circ \pm 20\%$ (± 120 cm $\pm 20\%$) *Based on 1 m detection distance
Warning Sound	4-stage Tone and ratio: 0.0-0.5 / 0.6-1.0 / 1.1-2.0 / 2.1-3.0 m
Warning Display	FND distance display / LED sensor position (left/right) indication
sensor	Ultrasonic attachable type / Embedded type, supports up to 6 sensors
Operating Voltage	12 -24V
Sensor Type	Attachable type (double-sided tape, waterproof) / embedded type (waterproof)
communication type	Wired
Power Consumption	Display / main unit ≤ 250 mA (12 V) / ≤ 125 mA (24 V)
Operating Temperature	-25°C to 60°C
Storage Temperature	-40°C to 80°C
Size (Main unit)	Main unit: 89×80×22 mm
Size (Sensor)	Attachable: 40×27×19 mm// Embedded: 24.6×21×21 mm

- When used as a front sensor, the detection start distance can be changed from 3 m to 1 m.
- By linking with the vehicle speed signal, it can also be set to operate only when the vehicle speed is 20 km/h or less.



Detects distances up to 3m

- Switchable between 1m and 3m according to purpose of use
- Each of the 6 sensors can be switched individually
- Notifies distance from up to 3m in 10cm increments
- Sound can be switched between voice and beep

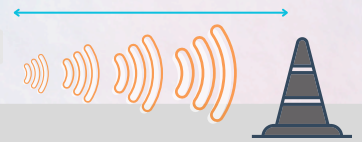

Horizontal width



Vertical (Height)



- Maintains safe 1m distance from vehicle ahead



- Detects overhead obstacles



- Reacts to sudden hazards missed by rear camera



- Usable as anti-entanglement sensor

Attachable Type



- Protrudes from vehicle side
- Attached with double-sided tape



Sensor adhesive type
(Cable length: 7 m)

*Includes double-sided tape




Embedded type



- Embedded into vehicle side
- Requires drilling




Dedicated mounting bracket for embedded sensor type

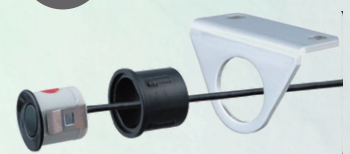

Embedded sensor type
(Cable length: 7 m)

Display Image Example

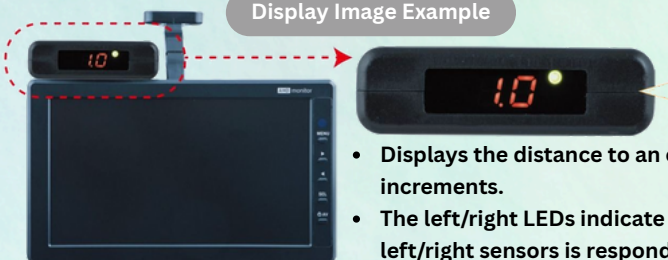

- Displays the distance to an obstacle in 10 cm increments.
- The left/right LEDs indicate which of the left/right sensors is responding.
- The closer side's LED blinks with priority.

*Does not distinguish between up/down or front/rear.

When approaching 3 m to 2.1 m	"Beep... Beep..." (slow beeping)
When approaching 2 m to 1.1 m	"Beep beep beep" (slightly faster beeping)
At 1 m	"Stop, Stop!" (voice)
At 50 cm or less	"Beeeeeeep!" (fast beeping)