UJIAN PRAKTEK
PRAKTIKUM KONSEP JARINGAN
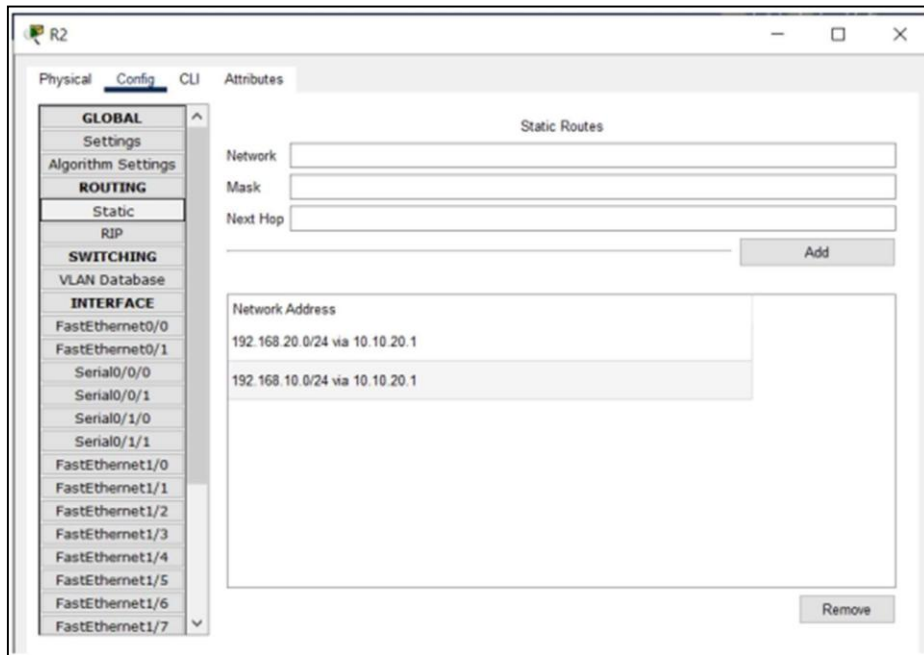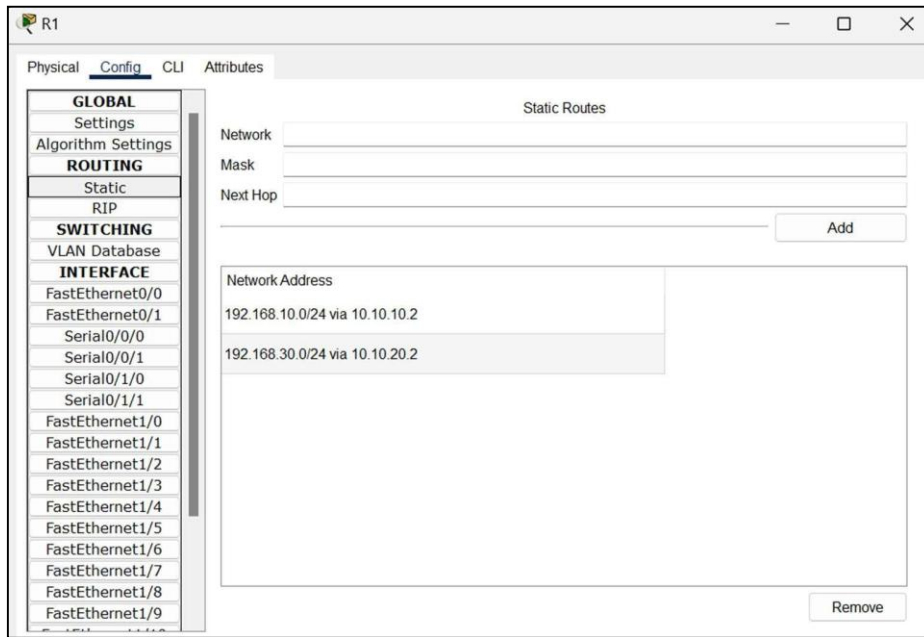

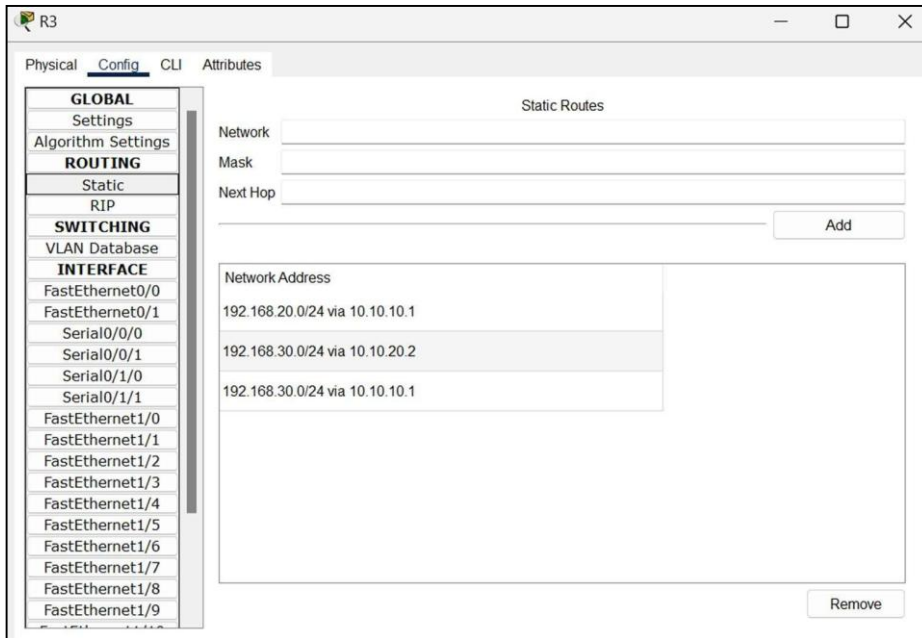Dr. Ferry Astika Saputra ST, M.Sc

Nama   : Hafiza Rizky Irland

Kelas   : 2 / D4 Teknik Informatika A

NRP   3122600021

LAPORAN PRAKTEK
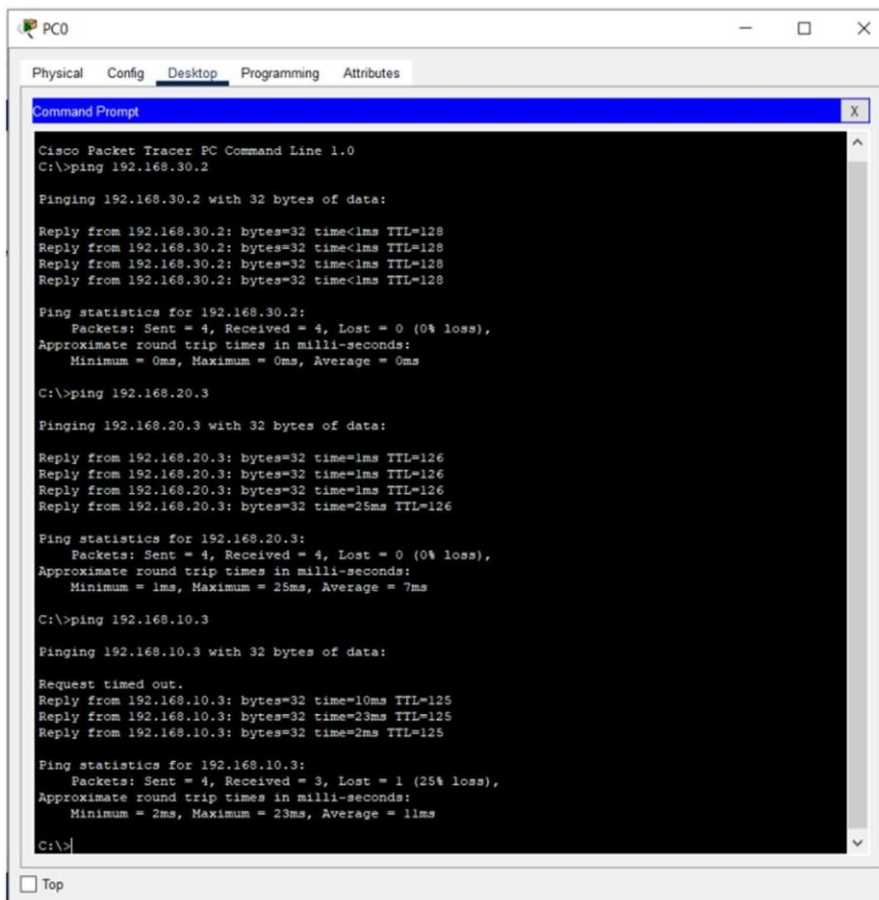# PRAKTIKUM KONSEP JARINGAN

1. Konfigurasi router:

Ping antar PC:

Physical   Config   Desktop   Programming   Attributes

Command Prompt   X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=13ms TTL=126
Reply from 192.168.20.2: bytes=32 time=7ms TTL=126
Reply from 192.168.20.2: bytes=32 time=16ms TTL=126
Reply from 192.168.20.2: bytes=32 time=13ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 7ms, Maximum = 16ms, Average = 12ms

C:\>ping 192.168.30.2

Pinging 192.168.30.2 with 32 bytes of data:

Reply from 192.168.30.2: bytes=32 time=18ms TTL=125
Reply from 192.168.30.2: bytes=32 time=2ms TTL=125
Reply from 192.168.30.2: bytes=32 time=18ms TTL=125
Reply from 192.168.30.2: bytes=32 time=24ms TTL=125

Ping statistics for 192.168.30.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 24ms, Average = 15ms

C:\>
```

☐ Top

Physical   Config   Desktop   Programming   Attributes

Command Prompt   X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time=25ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 25ms, Average = 6ms

C:\>ping 192.168.30.3

Pinging 192.168.30.3 with 32 bytes of data:

Reply from 192.168.30.3: bytes=32 time=1ms TTL=126
Reply from 192.168.30.3: bytes=32 time=1ms TTL=126
Reply from 192.168.30.3: bytes=32 time=2ms TTL=126
Reply from 192.168.30.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.30.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\>ping 192.168.10.3

Pinging 192.168.10.3 with 32 bytes of data:

Reply from 192.168.10.3: bytes=32 time=11ms TTL=126
Reply from 192.168.10.3: bytes=32 time=1ms TTL=126
Reply from 192.168.10.3: bytes=32 time=1ms TTL=126
Reply from 192.168.10.3: bytes=32 time=9ms TTL=126

Ping statistics for 192.168.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 11ms, Average = 5ms

C:\>
```
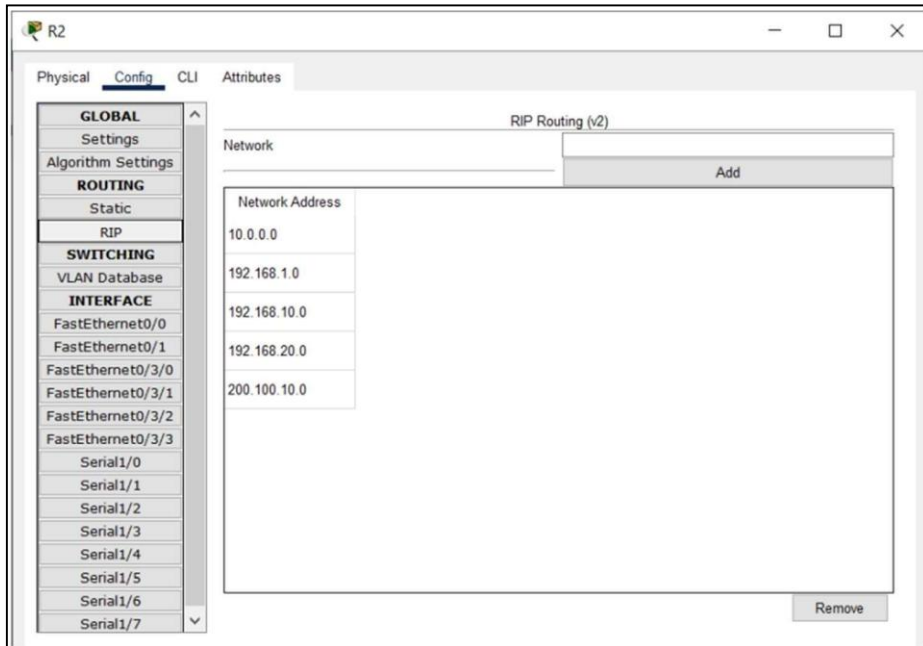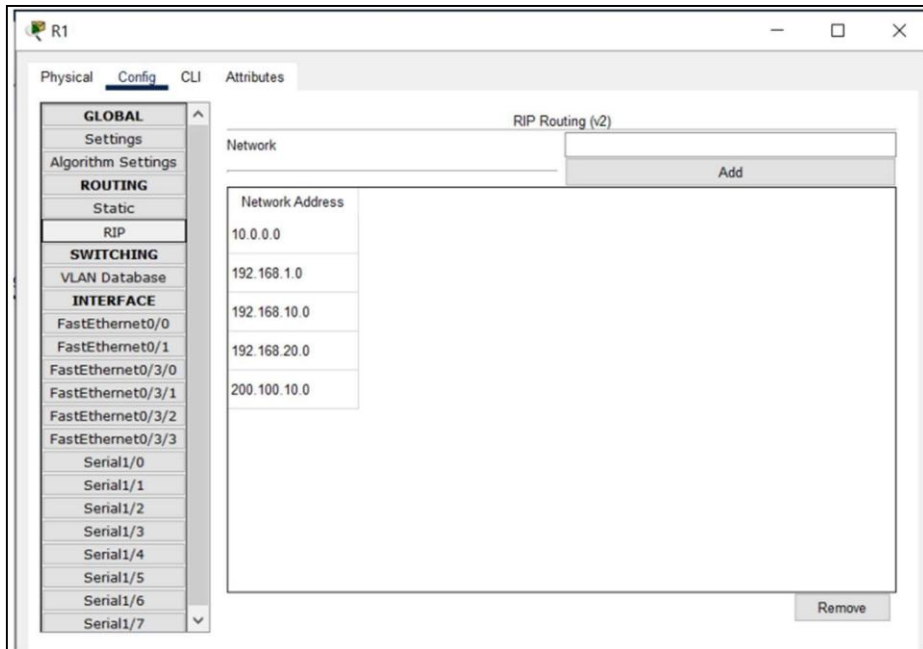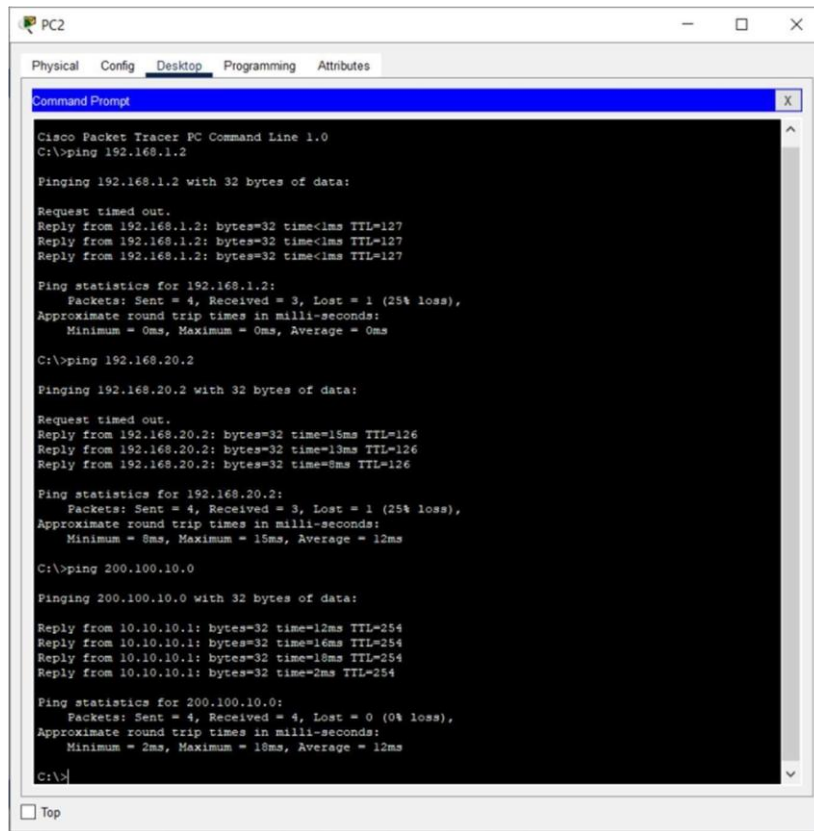
☐ Top

2. Konfigurasi Router:

Ping antar PC:

PC2

Physical   Config   Desktop   Programming   Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.2: bytes=32 time<1ms TTL=127
Reply from 192.168.1.2: bytes=32 time<1ms TTL=127
Reply from 192.168.1.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.20.2: bytes=32 time=15ms TTL=126
Reply from 192.168.20.2: bytes=32 time=13ms TTL=126
Reply from 192.168.20.2: bytes=32 time=8ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 8ms, Maximum = 15ms, Average = 12ms

C:\>ping 200.100.10.0

Pinging 200.100.10.0 with 32 bytes of data:

Reply from 10.10.10.1: bytes=32 time=12ms TTL=254
Reply from 10.10.10.1: bytes=32 time=16ms TTL=254
Reply from 10.10.10.1: bytes=32 time=18ms TTL=254
Reply from 10.10.10.1: bytes=32 time=2ms TTL=254

Ping statistics for 200.100.10.0:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 18ms, Average = 12ms

C:\>
```
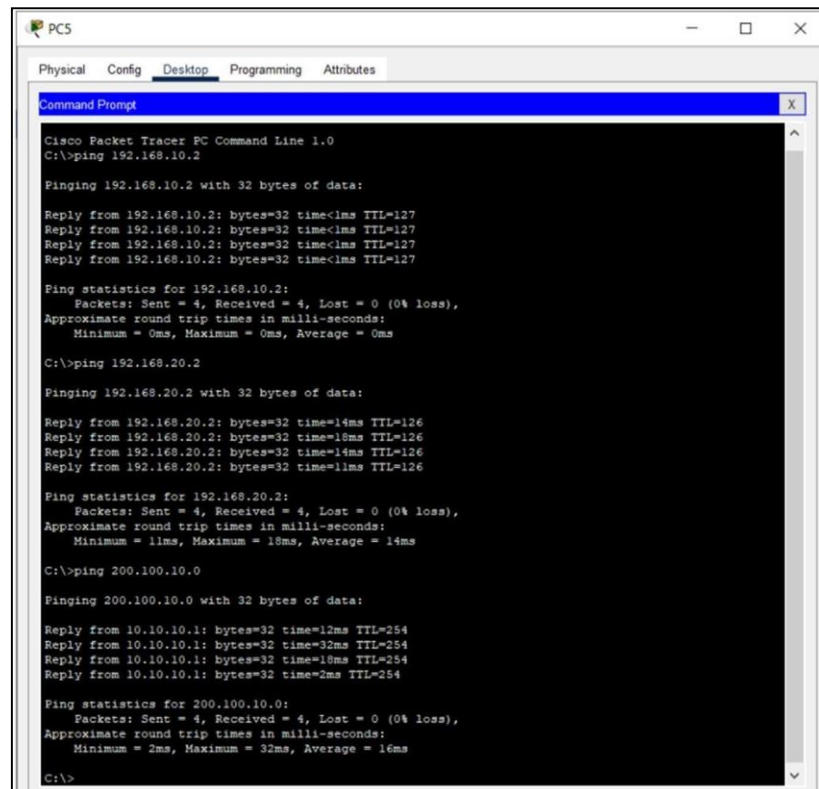
☐ Top

PC5

Physical   Config   Desktop   Programming   Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=14ms TTL=126
Reply from 192.168.20.2: bytes=32 time=18ms TTL=126
Reply from 192.168.20.2: bytes=32 time=14ms TTL=126
Reply from 192.168.20.2: bytes=32 time=11ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 11ms, Maximum = 18ms, Average = 14ms

C:\>ping 200.100.10.0

Pinging 200.100.10.0 with 32 bytes of data:

Reply from 10.10.10.1: bytes=32 time=12ms TTL=254
Reply from 10.10.10.1: bytes=32 time=32ms TTL=254
Reply from 10.10.10.1: bytes=32 time=18ms TTL=254
Reply from 10.10.10.1: bytes=32 time=2ms TTL=254

Ping statistics for 200.100.10.0:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 32ms, Average = 16ms

C:\>
```

3. Konfigurasi Router:

Ping antar PC: