


VIDEO TUTORIAL

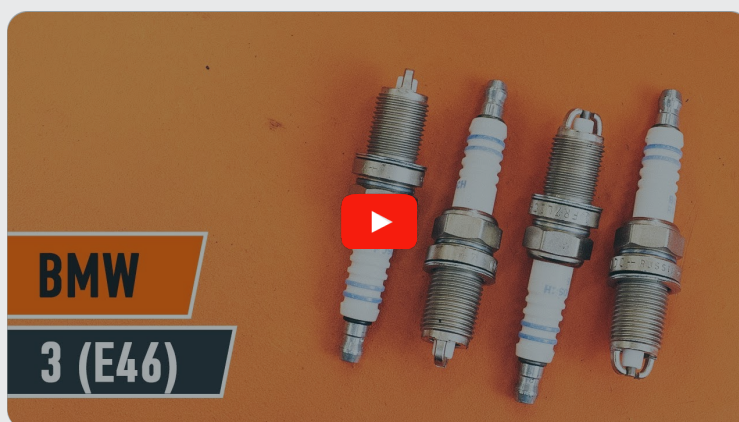

i Important!

This replacement procedure can be used for:

BMW 3 Saloon (E30) 316i 1.6, BMW 3 Saloon (E30) 318i 1.8, BMW 3 Saloon (E30) 318is 1.8, BMW 3 Touring (E30) 318i 1.8, BMW 3 Saloon (E36) 316i 1.6, BMW 3 Saloon (E36) 318i 1.8, BMW 3 Saloon (E36) 318is 1.8, BMW 3 Coupe (E36) 318is 1.8, BMW 3 Touring (E30) 316i 1.6, BMW 3 Convertible (E30) 318i 1.8, BMW 3 Coupe (E36) 316i 1.6, BMW 3 Convertible (E36) 318i 1.8, BMW 3 Compact (E36) 316i 1.6, BMW 5 Touring (E34) 518g 1.8, BMW 3 Compact (E36) 318ti 1.8, (+ 30)

The steps may slightly vary depending on the car design.

REPLACEMENT: SPARK PLUGS – BMW E46. LIST OF THE TOOLS YOU'LL NEED:



- High-temperature anti-seize lubricant
- Spark plug socket # 16
- Ratchet wrench
- Torque wrench
- Round-nose pliers
- Fender cover

BUY TOOLS

Replacement: spark plugs – BMW E46. AUTODOC recommends:

- The replacement procedure is the same for all spark plugs.
- All work should be done with the engine stopped.

REPLACEMENT: SPARK PLUGS – BMW E46. USE THE FOLLOWING PROCEDURE:

1

Open the bonnet.




2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3

Remove the spark plug wire connectors from the spark plug wells. Use round-nose pliers.

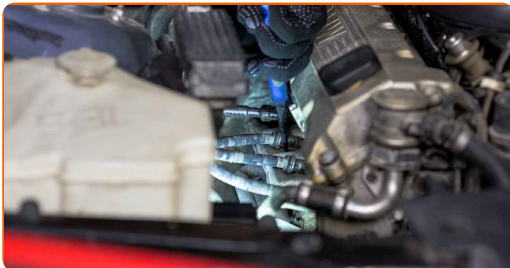


Replacement: spark plugs – BMW E46. Professionals recommend:

- Be careful to avoid damaging spark plug wires.
- Remember the sequence of the spark plug wires connectors.


4

Unscrew the spark plugs. Use the spark plug socket #16. Use a ratchet wrench.

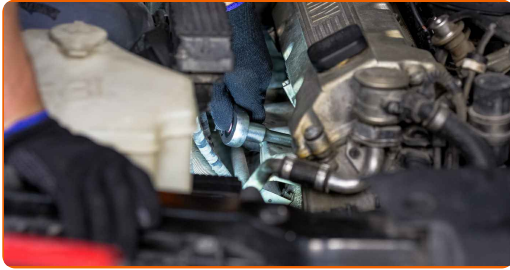


5

Take out the spark plugs.

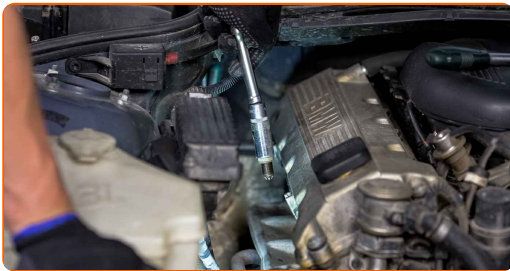


6

Apply a thin layer of a special high temperature anti-seize lubricant to the threads of the new spark plugs.

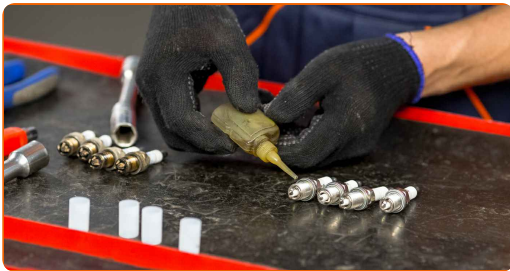


7

Install the new spark plugs into their mounting seats. Use the spark plug socket #16.

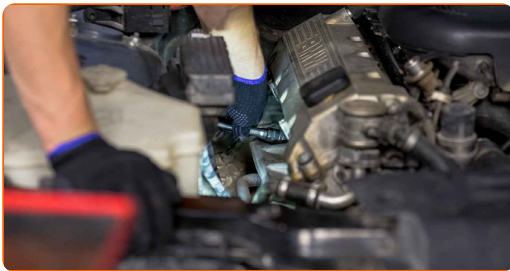


- 8 Screw new spark plugs and tighten them. Use the spark plug socket #16. Use a torque wrench. Tighten it to 27 nm torque.

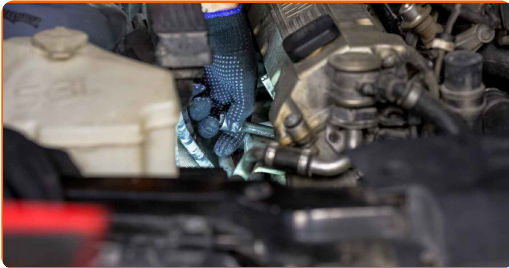

Replacement: spark plugs – BMW E46. AUTODOC experts recommend:

- Don't tighten the plugs with excessive force. Exceeding tightening torque can damage the thread connection.
- Be careful when working with a spark plug wrench. Its skewing can cause damage to the threaded connection.

- 9 Install the spark plug wire connectors into the spark plug wells. Make sure you hear a click indicating that it is locked in place.

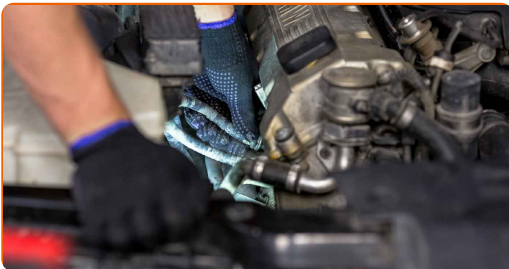

AUTODOC recommends:

- Replacement: spark plugs – BMW E46. Follow the installation steps.

10

Remove the fender protection cover. Close the hood.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR BMW

SPARK PLUGS: A WIDE SELECTION