


#### **VIDEO TUTORIAL**

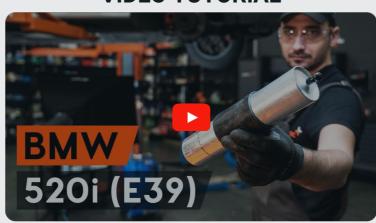

## i Important!

This replacement procedure can be used for:

BMW 3 Saloon (E36) 316i 1.6, BMW 3 Saloon (E36) 318i 1.8, BMW 3 Saloon (E36) 318is 1.8, BMW 3 Coupe (E36) 318is 1.8, BMW 3 Saloon (E36) 320i 2.0, BMW 3 Coupe (E36) 320i 2.0, BMW 5 Saloon (E34) 530i 3.0 V8, BMW 5 Saloon (E34) 540i 4.0 V8, BMW 5 Touring (E34) 530i 3.0 V8, BMW 3 Convertible (E36) 320i 2.0, BMW 3 Coupe (E36) 316i 1.6, BMW 5 Touring (E34) 540i 4.0, BMW 3 Convertible (E36) 318i 1.8, BMW 3 Compact (E36) 316i 1.6, BMW 7 (E38) 730i / iL 3.0, (+71)


The steps may slightly vary depending on the car design.

CLUB.AUTODOC.CO.UK 1–12





# REPLACEMENT: FUEL FILTER – BMW E39. TOOLS YOU MIGHT NEED:

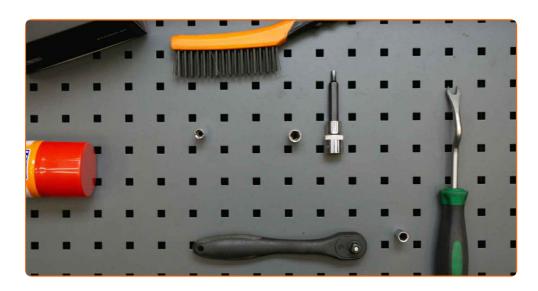

- Wire brush
- All-purpose cleaning spray
- Fluid container
- Drive socket # 5.5
- Drive socket #8

- Drive socket #10
- HEX bit No.H5.
- Ratchet wrench
- Clip removal tool
- Fender cover

**BUY TOOLS** 

CLUB.AUTODOC.CO.UK 2-12





#### Replacement: fuel filter – BMW E39. Tip from AUTODOC experts:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car BMW E39 should be done with the engine switched off.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

- Open the fuel door.
- 2 Unscrew the fuel filler cap.
- Open the bonnet.



Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



CLUB.AUTODOC.CO.UK 3-12







Lift the car using a jack or place it over an inspection pit.



Unscrew the fasteners of the underbody cover panel. Use a drive socket #10. Use a drive socket #8. Use a ratchet wrench.



Remove the clips of the underbody cover panel. Use a clip removal tool.



Remove the underbody cover panel.

8



## Replacement: fuel filter – BMW E39. Tip:

 Do not apply excessive force when removing the part. Otherwise you may damage it.

CLUB.AUTODOC.CO.UK 4-12







Clean the fasteners of the fuel supply lines. Use a nylon cleaning brush. Use all-purpose cleaning spray.



Prepare a container for fluids.

12



Unscrew the fastener attaching the fuel supply line to the fuel filter housing. Use a drive socket #5.5. Use a ratchet wrench.



Disconnect the fuel supply lines from the fuel filter.



CLUB.AUTODOC.CO.UK 5-12







Clean the fuel filter mounting bracket. Use WD-40 spray.



Loosen the fuel filter mounting. Use HEX No.H5. Use a ratchet wrench.



Remove the fuel filter.



16 Install a new fuel filter.



CLUB.AUTODOC.CO.UK 6-12



## Replacement: fuel filter – BMW E39. Tip from AUTODOC:

- Remember, it is important not to mix up the input and output of the filter. Arrows
  on the filter indicate the direction of fuel flow.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- BMW E39 It's important to only use high-quality filters.
- Connect the fuel supply lines to the fuel filter.



Screw in the fuel filter mounting bracket. Use HEX No.H5. Use a ratchet wrench.



19

Screw the fastener attaching the fuel supply line to the fuel filter housing. Use a drive socket #5.5. Use a ratchet wrench.



CLUB.AUTODOC.CO.UK 7-12







Take the fluid container away from under the fuel filter.



Put the underbody cover panel back in place.



Screw in the fasteners of the underbody cover panel. Use a drive socket #8. Use a drive socket #10. Use a ratchet wrench.



23 Install the clips of the underbody cover panel.



Lower the car.



CLUB.AUTODOC.CO.UK 8-12



## (C)

#### Replacement: fuel filter – BMW E39. Professionals recommend:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.
- Tighten the fuel filler cap.
- Close the fuel door.
- Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



28 Shut off the engine.



- Remove the fender protection cover.
- Close the hood.

CLUB.AUTODOC.CO.UK 9-12



## Replacement: fuel filter – BMW E39. AUTODOC recommends:

• To protect the environment from pollution, be sure to dispose of the used filters at special collection points.



**VIEW MORE TUTORIALS** 

CLUB.AUTODOC.CO.UK 10-12