

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

BMW 3 Saloon (E36) 320i 2.0, BMW 3 Coupe (E36) 320i 2.0, BMW 3 Saloon (E36) 325i 2.5, BMW 3 Coupe (E36) 325i 2.5, BMW 3 Convertible (E36) 320i 2.0, BMW 3 Convertible (E36) 325i 2.5, BMW 3 Coupe (E36) M3 3.0, BMW 3 Convertible (E36) M3 3.0, BMW 3 Touring (E36) 320i 2.0, BMW 3 Touring (E36) 328i 2.8, BMW 3 Saloon (E36) 328i 2.8, BMW 3 Saloon (E36) 323i 2.5, BMW 3 Coupe (E36) 328i 2.8, BMW 3 Convertible (E36) 328i 2.8, BMW 5 Saloon (E39) 523i 2.5, (+ 68)

The steps may slightly vary depending on the car design.

REPLACEMENT: AIR FILTER – BMW E39. TOOLS YOU NEED:



- Fender cover

BUY TOOLS


AUTODOC recommends:

- Replacement: air filter – BMW E39. Do not ignore the maintenance schedule, recommendations, and requirements specified by the manufacturer on the use of the car part.
- All work should be done with the engine stopped.

REPLACEMENT: AIR FILTER – BMW E39. USE THE FOLLOWING PROCEDURE:


1

Open the bonnet.

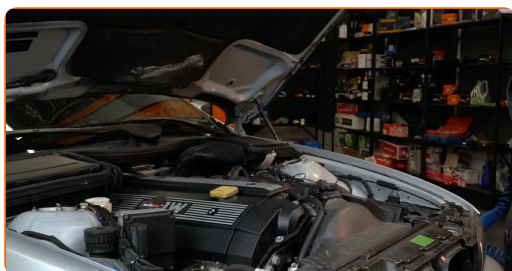

2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

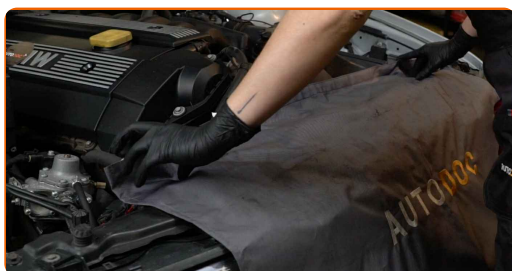

3

Release the air filter cover clips.



4

Remove the air filter housing.



5

Clean the air filter cover and housing.




Replacement: air filter – BMW E39. Tip from AUTODOC experts:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.


6

Remove the filter element from the filter housing.

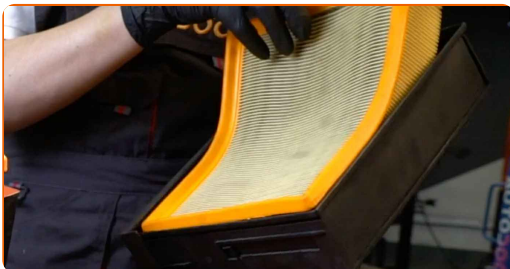

7

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

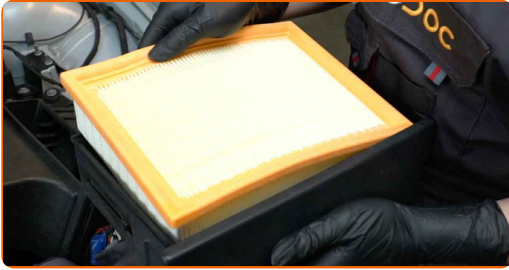


AUTODOC recommends:

- Replacement: air filter – BMW E39. Be sure to position the filtering element correctly. Avoid misalignment.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.
- Take care to only use quality filters.


8

Reinstall the air filter housing.

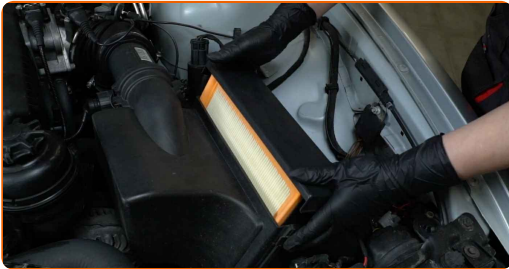

9

Press the air filter cover clips into place.

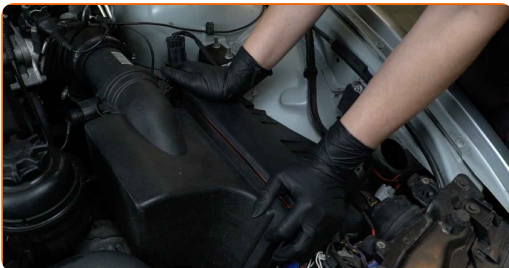


10

Remove the fender protection cover.



11

Close the hood.

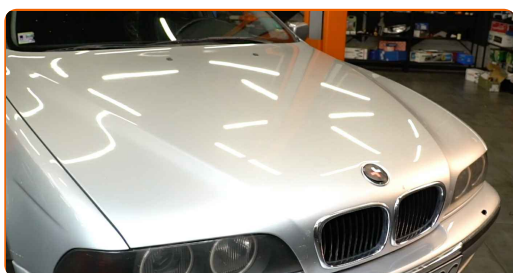

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR BMW

AIR FILTER: A WIDE SELECTION