

VIDEO TUTORIAL



i Important!

This replacement procedure can be used for:

BMW 3 Saloon (E36) 316i 1.6, BMW 3 Saloon (E36) 318is 1.8, BMW 3 Coupe (E36) 318is 1.8, BMW 3 Saloon (E36) 320i 2.0, BMW 3 Coupe (E36) 320i 2.0, BMW 5 Saloon (E34) 530i 3.0 V8, BMW 5 Saloon (E34) 540i 4.0 V8, BMW 5 Touring (E34) 530i 3.0 V8, BMW 3 Convertible (E36) 320i 2.0, BMW 3 Coupe (E36) 316i 1.6, BMW 5 Touring (E34) 540i 4.0, BMW 3 Convertible (E36) 318i 1.8, BMW 3 Compact (E36) 316i 1.6, BMW 7 (E38) 730i / iL 3.0, BMW 7 (E38) 740i / iL 4.0, (+ 66)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – BMW E46. TOOLS YOU'LL NEED:



- Drive socket # 10
- Ratchet wrench
- Flat Screwdriver
- Fluid container

BUY TOOLS

Replacement: fuel filter – BMW E46. AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – BMW E46. USE THE FOLLOWING PROCEDURE:

1


Lift the car using a jack or place it over an inspection pit.

**2**

Prepare a container for fluids.


**3**

Loosen the fuel filter mounting. Use a drive socket #10. Use a ratchet wrench.

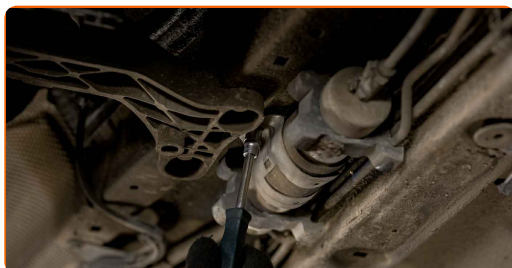

4

Remove the fuel filter fastening bracket.

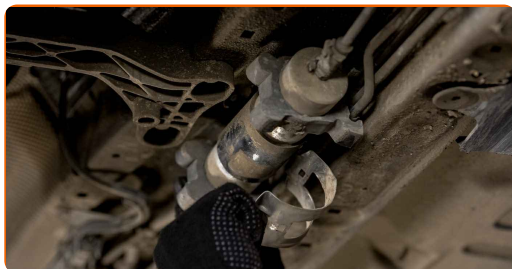


5

Loosen the fastening clamps of the fuel filter pipes. Use a flat screwdriver.

6

Detach the tubes from the fuel filter.

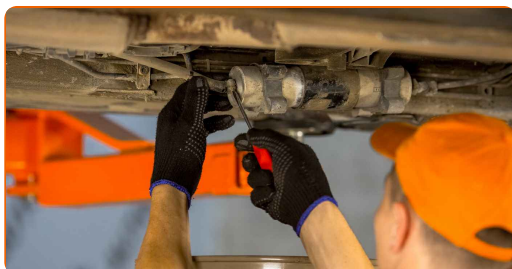

Replacement: fuel filter – BMW E46. AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.

7

Remove the fuel filter.



8

Put the old filter cartridge in the container.



9

Install a new fuel filter.



Replacement: fuel filter – BMW E46. Tip:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.

10

Attach the tubes to the fuel filter.




11

Take the fluid container away from under the fuel filter.


12

Install the fuel filter fastening bracket.

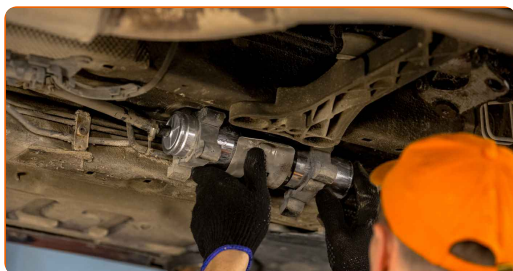


13

Tighten the fuel filter fasteners. Use a drive socket #10. Use a ratchet wrench.

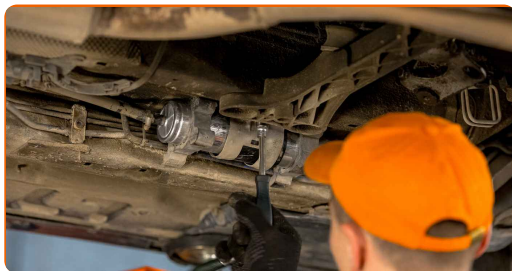


14

Tighten the fastening clamps of the fuel filter pipes. Use a flat screwdriver.

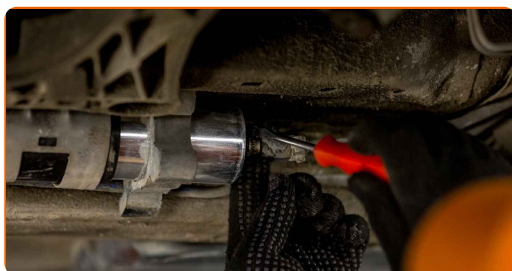

15

Lower the car.

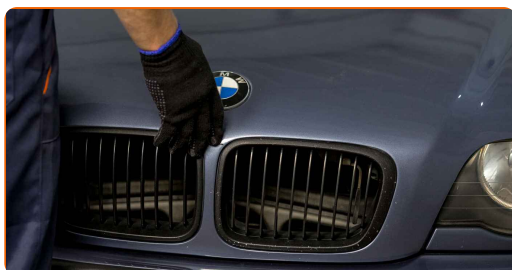

Replacement: fuel filter – BMW E46. AUTODOC experts recommend:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

16

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



17

Shut off the engine.

Replacement: fuel filter – BMW E46. Tip from AUTODOC:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 👍

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR BMW

FUEL FILTER: A WIDE SELECTION