

## SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

### **i Important!**


This replacement procedure can be used for:

BMW 3 Coupe (E92) 318i 2.0, BMW 3 Coupe (E92) 335i 3.0, BMW 3 Coupe (E92) 335d 3.0, BMW 3 Coupe (E92) 320i 2.0, BMW 3 Coupe (E92) M, BMW 3 Coupe (E92) 325i 3.0, BMW 3 Coupe (E92) 330d 3.0, BMW 3 Coupe (E92) 328i 3.0, BMW 3 Coupe (E92) 330i xDrive 3.0, BMW 3 Coupe (E92) 335i xDrive 3.0, BMW 3 Coupe (E92) 330d xDrive 3.0, BMW 3 Coupe (E92) 320d xDrive 2.0, BMW 3 Coupe (E92) 320d 2.0, BMW 3 Coupe (E92) 325d 3.0, BMW 3 Coupe (E92) 325i 2.5, (+ 7)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: BMW 1 Coupe (E82) 125i 3.0

## REPLACEMENT: GLASS FOR WING MIRROR – BMW 3 COUPE (E92). LIST OF THE TOOLS YOU'LL NEED:

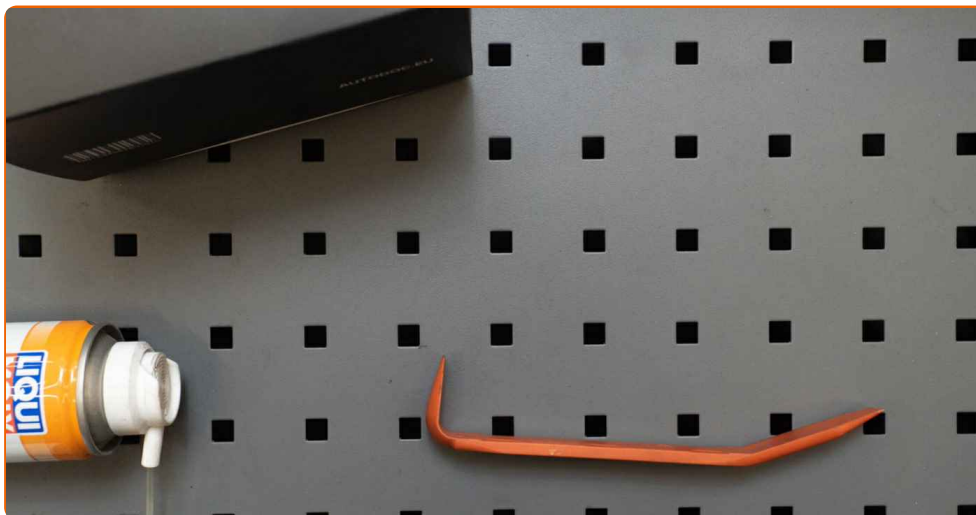

• Plastic trim tool

• Fender cover

**Buy tools**


Replacement: glass for wing mirror – BMW 3 Coupe (E92). Professionals recommend:

- The replacement procedure is identical for the right and left side mirror glass.
- All work should be done with the engine stopped.

## REPLACEMENT: GLASS FOR WING MIRROR – BMW 3 COUPE (E92). RECOMMENDED SEQUENCE OF STEPS:


1

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

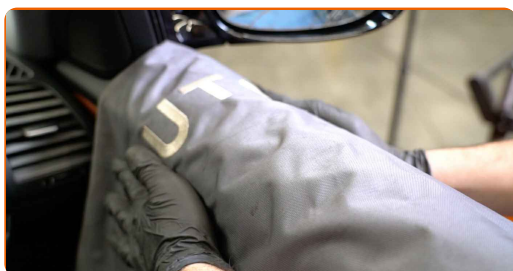

2

Tilt the mirror glass out of the housing.

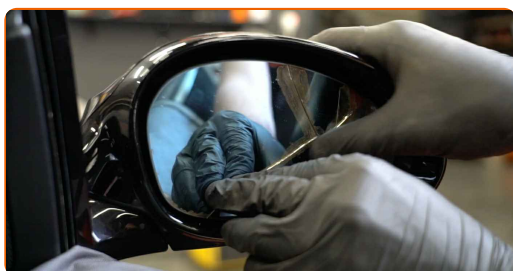


3

Carefully release the mirror glass from its attachment. Use a plastic trim tool.



4

Remove the mirror glass.

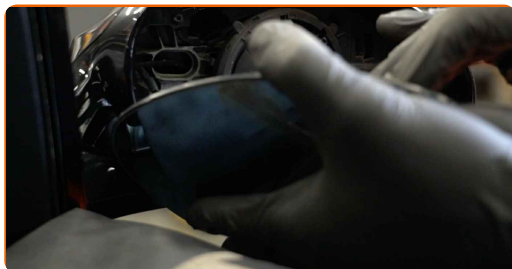


### AUTODOC recommends:

- Replacement: glass for wing mirror – BMW 3 Coupe (E92). Do not use excessive force when removing the part as this may damage it.

5

Detach the mirror heating connectors.

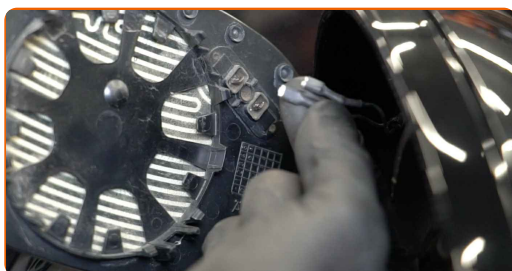


6

Attach the mirror heating connectors.



7

Install the new mirror glass. Make sure you hear a click indicating that it is locked in place.

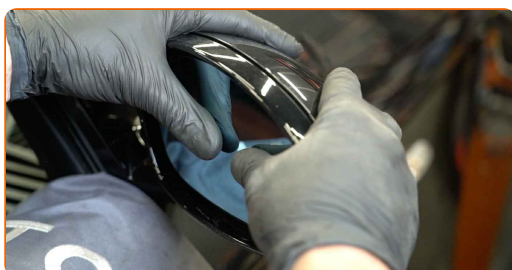

## Replacement: glass for wing mirror – BMW 3 Coupe (E92). AUTODOC recommends:


- Do not apply excessive force when installing the part. Otherwise you may damage the fasteners.
- Make sure the mirror glass is positioned correctly. It should be aligned with the locking tabs on the housing.

8

Clean the mirror glass.


9

Remove the fender protection cover.

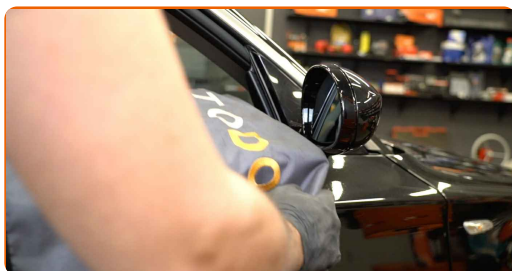

10

Switch on the ignition. This is necessary in order to make sure that the component operates properly.

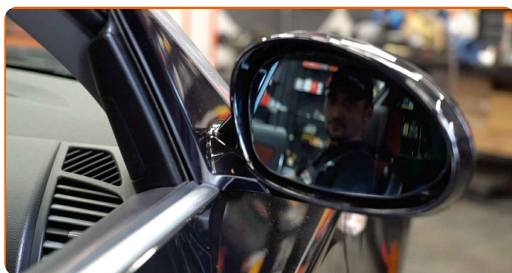

11

Switch off the ignition.

## WELL DONE! 👍

[VIEW MORE TUTORIALS](#)