

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!


This replacement procedure can be used for:

BMW 3 Touring (E91) 325i 3.0, BMW 3 Touring (E91) 318d 2.0, BMW 3 Touring (E91) 318i 2.0, BMW 3 Touring (E91) 316d 2.0, BMW 3 Touring (E91) 320i 2.0, BMW 3 Touring (E91) 325i 2.5, BMW 3 Touring (E91) 320d 2.0, BMW 3 Touring (E91) 325xi 2.5, BMW 3 Touring (E91) 325xi 3.0, BMW 3 Touring (E91) 323i 2.5, BMW 3 Touring (E91) 316i 1.6, BMW 3 Touring (E91) 328i xDrive 3.0, BMW 3 Touring (E91) 320d xDrive 2.0, BMW 3 Touring (E91) 325 xi, BMW 3 Touring (E91) 325 i xDrive

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: BMW 3 Saloon (E90) 318i 2.0

REPLACEMENT: BRAKE PADS – BMW 3 TOURING (E91). TOOLS YOU MIGHT NEED:

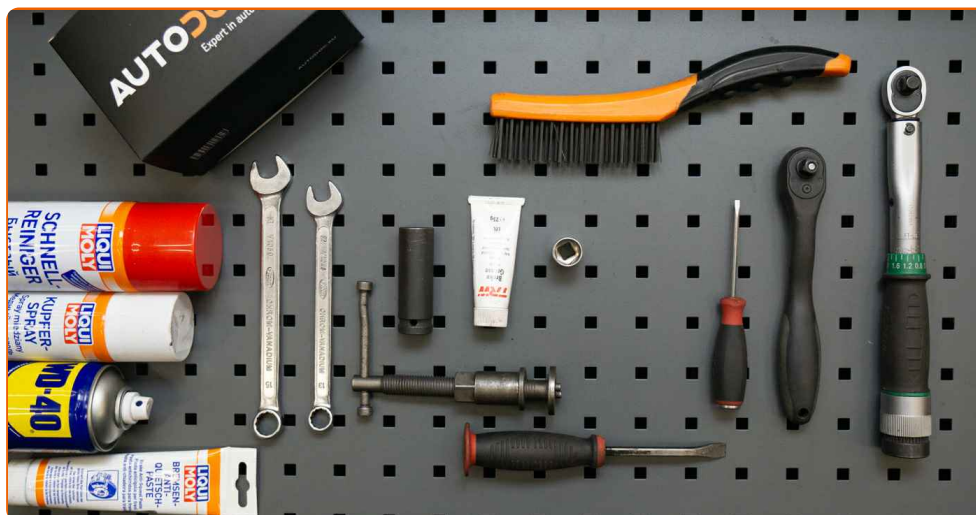

- Wire brush
- WD-40 spray
- Brake cleaner
- Anti-squeal paste
- Copper grease
- Combination spanner #13
- Combination spanner #15
- Drive socket # 13
- Wheel impact socket #17
- Torque wrench
- Brake caliper wind back tool
- Flat Screwdriver
- Crow bar
- Wheel chock

Buy tools


Replacement: brake pads – BMW 3 Touring (E91). AUTODOC recommends:

- Perform the replacement of brake pads in complete set for each axis. This provides effective braking.
- The replacement procedure is identical for all brake pads on the same axle.
- Please note: all work on the car – BMW 3 Touring (E91) – should be done with the engine switched off.


CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the bonnet. Unscrew the brake fluid reservoir cap.

2 Secure the wheels with chocks.

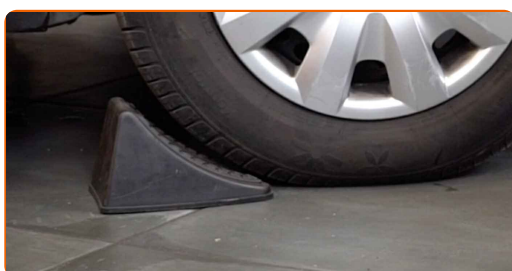

3 Loosen the wheel mounting bolts. Use wheel impact socket #17.

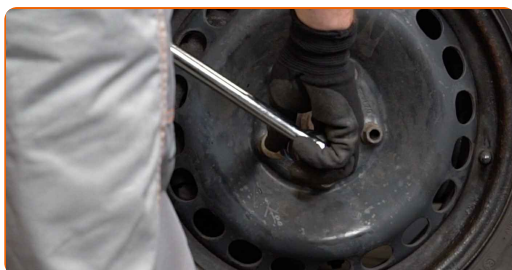

4 Raise the rear of the car and secure on supports.


5 Unscrew the wheel bolts.



AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while unscrewing the fastening bolts.
BMW 3 Touring (E91)

6 Remove the wheel.

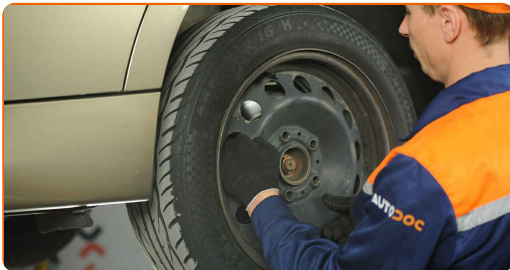


7 Clean the brake caliper fasteners. Use a wire brush. Use WD-40 spray.

8 Unscrew the brake caliper fastening. Use a combination spanner #13. Use a combination spanner #15.




9

Spread the brake pads. Use a crowbar.

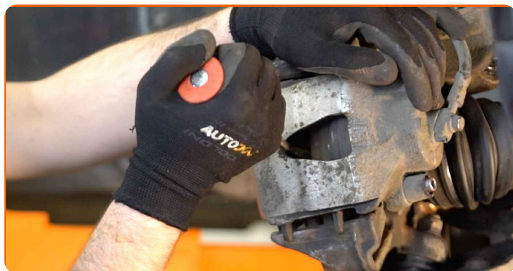

10


Remove the brake caliper.

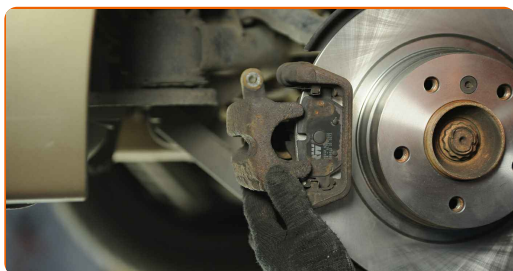

Replacement: brake pads – BMW 3 Touring (E91). AUTODOC experts recommend:

- Tie the caliper to the suspension or to the body with a wire without disconnecting from the brake hose to prevent depressurization of the brake system.
- Make sure that the brake caliper is not hanging on the brake hose.
- Don't press the brake pedal after the brake caliper has been removed. As a result, the piston can fall out from the brake cylinder, and brake fluid leakage and depressurization of the system may occur.
- Check the brake caliper bracket, brake caliper guide pins and boots. Clean them. Replace, if necessary.

- 11 Remove the brake pads. Use a flat screwdriver.

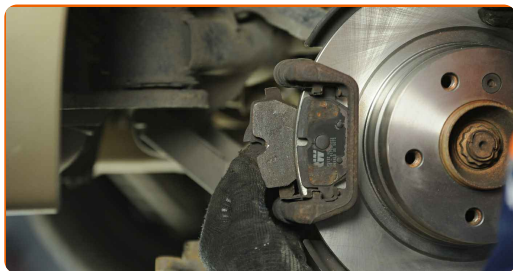

- 12 Remove the brake pads retaining clips. Use a flat screwdriver.




- 13 Clean the brake caliper bracket from dirt and dust. Use a wire brush. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake pads – BMW 3 Touring (E91). After applying the spray, wait a few minutes.

- 14 Install the brake pads retaining clips.

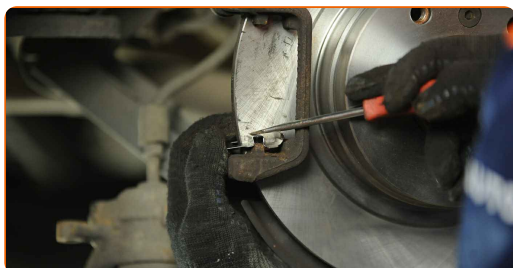


- 15** Treat the brake pads in the area where their surface comes into contact with the brake caliper bracket. Use anti-squeal paste.



AUTODOC recommends:

- Make sure the disc surface is clean before installing the pads.

- 16** Install new brake pads.

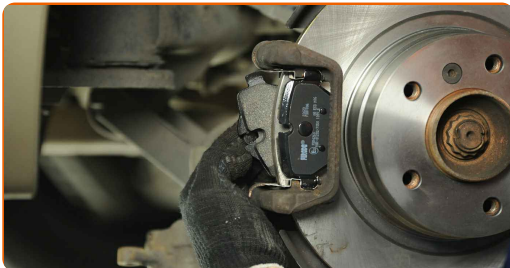

Replacement: brake pads – BMW 3 Touring (E91). Tip:

- Make sure the pads are installed with linings facing the disc.

- 17** Treat the brake caliper piston. Use a brake cleaner.




AUTODOC recommends:

- Replacement: brake pads – BMW 3 Touring (E91). After applying the spray, wait a few minutes.


18

Press in the brake caliper piston. Use brake caliper wind back tool.

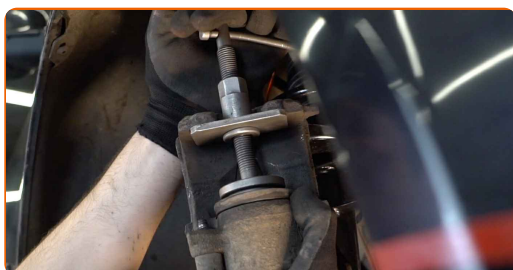

19

Install the brake caliper and fix it. Use a combination spanner #15. Use a drive socket #13. Use a torque wrench. Tighten it to 35 Nm torque.

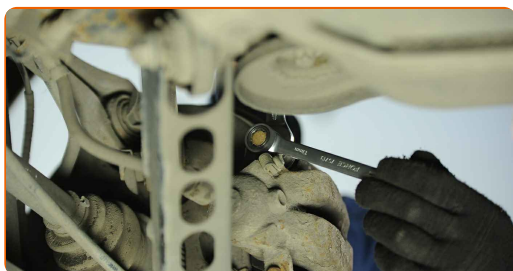

20

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



21

Clean the brake disk surface. Use a brake cleaner.



Replacement: brake pads – BMW 3 Touring (E91). Tip from AUTODOC experts:

- After applying the spray, wait a few minutes.

22

Install the wheel.




AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. BMW 3 Touring (E91)

23

Screw in the wheel bolts. Use wheel impact socket #17.

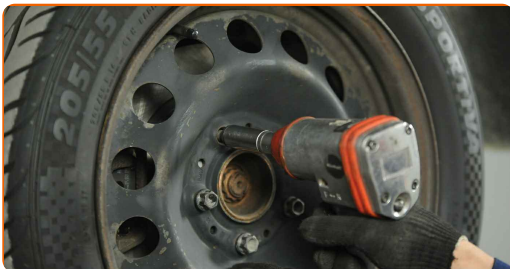

24

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 120 Nm torque.



Replacement: brake pads – BMW 3 Touring (E91). Tip:

- Without starting the engine, press the brake pedal several times until you feel significant resistance.

25

Remove the jacks and chocks.



AUTODOC recommends:

- Check the brake fluid level in the expansion tank and refill if necessary.

26

Tighten the brake fluid reservoir cap. Close the hood.

Replacement: brake pads – BMW 3 Touring (E91). AUTODOC recommends:

- Slow down smoothly for first 150-200 km after the brake pads replacement. Avoid unnecessary and sharp braking to a stop.

WELL DONE! 

VIEW MORE TUTORIALS