INNOLUX DISPLAY CORPORATION
LCD MODULE
SPECIFICATION

Customer:

Model Name: AT080TN42

SPEC NO.: A080-42-TT-02

Date: 2006/09/25

Version: 02

Preliminary Specification
Final Specification

Option
AT080TN42 (LCM)
T-CON Board (TDN025012)

For Customer's Acceptance

Approved by	Comment

INNOLUX DISPLAY CORPORATION
LCD MODULE
SPECIFICATION

Customer:

Model Name: AT080TN42

SPEC NO.: A080-42-TT-02

Date: 2006/09/25

Version: 02

Preliminary Specification
Final Specification

Approved by	Reviewed by	Prepared by

Record of Revision

Version	Revise Date	Page	Content
1	2006/08/02		Initial Release.
2	2006/09/25	4	Modify "Note 1: Selection of scanning mode" definition
		3	Modify the definition of Pin38, Pin43
		1	Add the Backlight Power Consumption and Weight.

INNOLUX

Contents

1. General Specifications

No.	Item	Specification	Remark
1	LCD size	8.0 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	800X3(RGB)X600	
4	Display mode	Normally White, Transmissive	
5	Dot pitch	0.0675(W)X0.2025(H) mm	
6	Active area	162(W)X121.5(H) mm	
7	Module size	183(W)X141(H)X6.3(D) mm	Note 1
8	Surface treatment	Anti-Glare	
9	Color arrangement	RGB-stripe	
10	Interface	Digital	
11	Backlight Power consumption	1.782W	
12	Panel Power consumption	TBD	
13	Weight	262.58 g	

Note 1: Refer to Mechanical Drawing.

2. Pin Assignment

2.1. TFT LCD Panel Driving Section

Pin No.	Symbol	I/O	Function	Remark
1	POL	I	Polarity selection	
2	STVD	I/O	Vertical start pulse input when U/D= H	Note 1
3	OEV	I	Output enable	
4	CKV	I	Vertical clock	
5	STVU	I/O	Vertical start pulse input when U/D= L	Note 1
6	GND	P	Power ground	
7	EDGSL	I	Select rising edge or falling edge	
8	V_{CC}	P	Power supply for digital circuit	
9	V9	I	Gamma voltage level 9	
10	V_{GL}	P	Gate OFF voltage	
11	V2	I	Gamma voltage level 2	
12	V_{GH}	P	Gate ON voltage	
13	V6	I	Gamma voltage level 6	
14	U/D	I	Up/down selection	Note 1, 2
15	V_{COM}	I	Common voltage	
16	GND	P	Power ground	
17	AV_{DD}	P	Power supply for analog circuit	
18	V14	I	Gamma voltage level 14	
19	V11	I	Gamma voltage level 11	
20	V8	I	Gamma voltage level 8	

21	V5	I	Gamma voltage level 5	
22	V3	I	Gamma voltage level 3	
23	GND	P	Power ground	
24	R5	I	Red data(MSB)	
25	R4	I	Red data	
26	R3	I	Red data	
27	R2	I	Red data	
28	R1	I	Red data	
29	R0	I	Red data(LSB)	
30	GND	P	Power ground	
31	GND	P	Power ground	
32	G5	I	Green data(MSB)	
33	G4	I	Green data	
34	G3	I	Green data	
35	G2	I	Green data	
36	G1	I	Green data	
37	G0	I	Green data(LSB)	
38	STHL	I/O	Horizontal start pulse input when R/L = L	Note 1
39	REV	I	Control signal are inverted or not	
40	GND	I	Power ground	
41	DCLK	I	Sample clock	
42	V_{CC}	P	Power supply for digital circuit	
43	STHR	I/O	Horizontal start pulse input when R/L =H	Note 1
44	LD	I	Latches the polarity of outputs and switches the new data to outputs	
45	B5	I	Blue data (MSB)	

46	B4	I	Blue data	
47	B3	I	Blue data	
48	B2	I	Blue data	
49	B1	I	Blue data	
50	B0	I	Blue data (LSB)	
51	R/L	I	Right/ left selection	Note 1, 2
52	V1	I	Gamma voltage level 1	
53	V4	I	Gamma voltage level 4	
54	V7	I	Gamma voltage level 7	
55	V10	I	Gamma voltage level 10	
56	V12	I	Gamma voltage level 12	
57	V13	I	Gamma voltage level 13	
58	AV_{DD}	P	Power supply for analog circuit	
59	GND	P	Power ground	
60	V_{COM}	I	Common voltage	

I: input, O: output, P: Power

Note 1: Selection of scanning mode

Setting of scan control input		IN/OUT state for start pulse				Scanning direction
U/D	R/L	STVD	STVU	STHR	STHL	
GND	V_{CC}	O	I	I	O	Up to down, left to right
V_{CC}	GND	I	O	O	I	Down to up, right to left
GND	GND	O	I	O	I	Up to down, right to left
V_{CC}	V_{CC}	I	O	I	O	Down to up, left to right

Note 2: Definition of scanning direction.

The copyright belongs to InnoLux. Any unauthorized use is prohibited.

Refer to the figure as below:
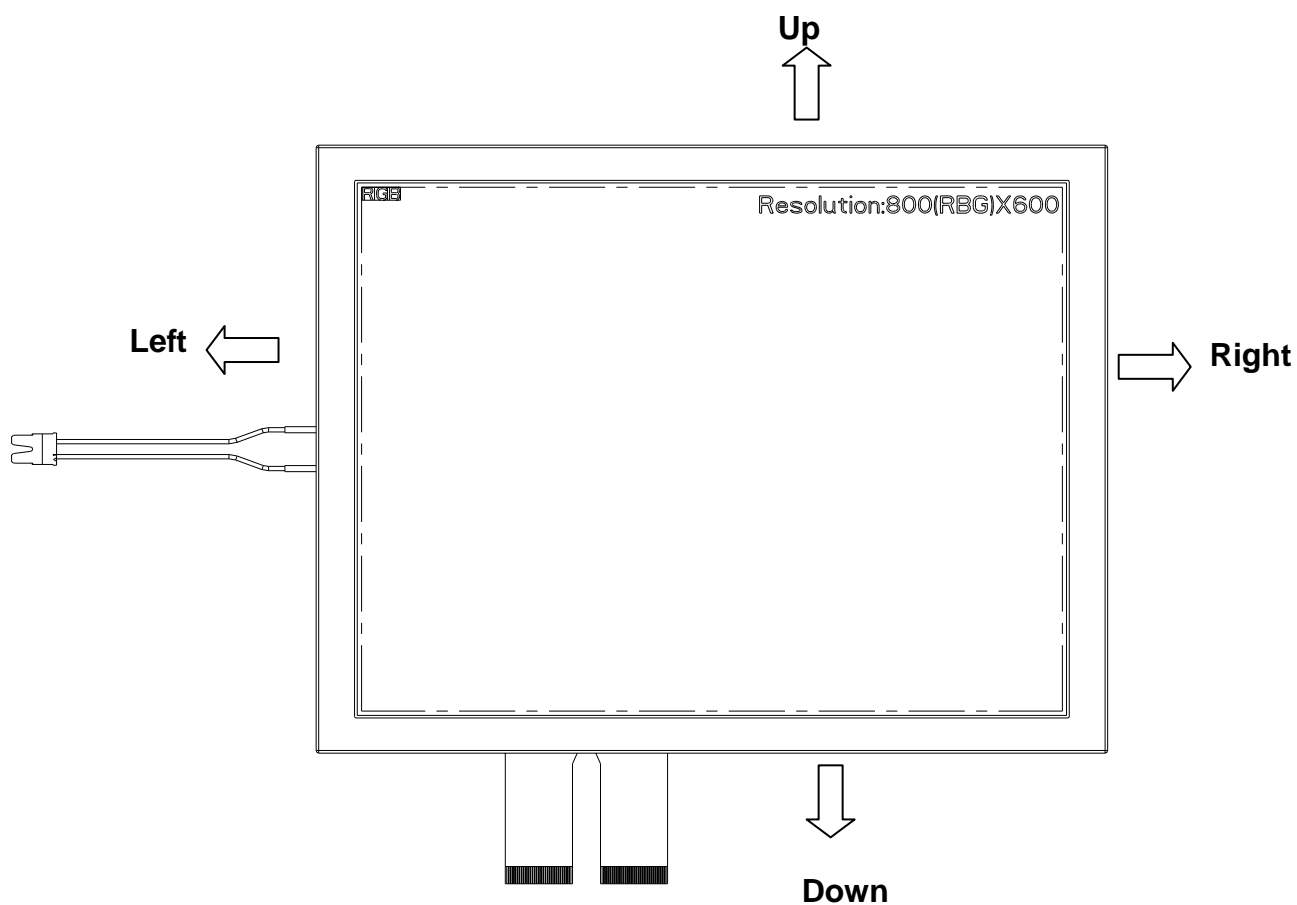
Note 3: When REV="L" , normally
REV="H", these data will be inverted.

2.2. Backlight Unit Section

Pin No.	Symbol	I/O	Function	Remark
1	HI	P	Power supply for backlight unit(High voltage)	Pink
2	GND	P	Ground for backlight unit	White

3. Operation Specifications

3.1. Absolute Maximum Rating

(GND=AV_{SS}=0V, Note 2)

Item	Symbol	Values		Unit	Remark
		Min.	**Max.**		
Power voltage	V_{CC}	-0.3	5.0	V	
	AV_{DD}	-0.5	13.5	V	
	V_{GH}	TBD	TBD	V	
	V_{GL}	TBD	TBD	V	
	V_{GH}-V_{GL}	-	33.0	V	
Input signal voltage	V1~V7	0.4 AV_{DD}	AV_{DD}+0.3	V	Note 1
	V8~V14	-0.3	0.6AV_{DD}	V	Note 1
Operation Temperature	T_{OP}	(-30)	(85)		
Storage Temperature	T_{ST}	(-40)	(95)		

Note 1: AV_{DD}-0.1≥ V1≥ V2≥ V3≥ V4≥ V5≥ V6≥ V7≥ V8≥ V9≥ V10≥ V11≥ V12≥ V13≥ V14≥ AV_{SS}+0.1

Note 2: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

3.1.1.　Typical Operation Conditions

(GND=AV$_{SS}$=0V, Note 1)

Item	Symbol	Values			Unit	Remark
		Min.	**Typ.**	**Max.**		
Power voltage	V$_{CC}$	3.0	3.3	3.6	V	Note 2
	AV$_{DD}$	-	10.0	-	V	
	V$_{GH}$	-	(16.0)	-	V	
	V$_{GL}$	-	(-7.0)	-	V	
Input signal voltage	V$_{COM}$	-	TBD	-	V	
	V1~V7	0.4 A$_{VDD}$	-	A$_{VDD}$ -0.1	V	
	V8~V14	0.1	-	0.6 A$_{VDD}$	V	
Input logic high voltage	V$_{IH}$	0.7V$_{CC}$	-	V$_{CC}$	V	Note 3
Input logic low voltage	V$_{IL}$	0	-	0.3V$_{CC}$	V	

Note : Be sure to apply V$_{CC}$ and V$_{GL}$ to the LCD first, and then apply V$_{GH}$.

Note 2: V$_{CC}$ setting should match the signals output voltage (refer to Note 3) of customer's system board .

Note 3: STHL, STHR, OEH, L/R, CPH1~CPH3, STVD, STVU, OEV, CKV, U/D.

### 3.1.2.　Current Consumption

(GND=AV$_{SS}$=0V)

INNOLUX

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Current for Driver	I_{GH}	-	TBD	TBD	mA	V_{GH} =16.0V
	I_{GL}	-	TBD	TBD	mA	V_{GL} = -7.0V
	I_{CC}	-	TBD	TBD	mA	V_{CC} =3.3V
	IAV_{DD}	-	TBD	TBD	mA	AV_{DD} =10.0V

3.1.3. Backlight Driving Conditions

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
LED voltage	V_L	-	9.9	10.5	V	Note 1
LED current	I_L	-	20	-	mA	Note 1
LED life time	-	20,000	-	-	Hr	Note 2

Note 1: The LED driving condition is defined for each LED module (3 LED Serial).
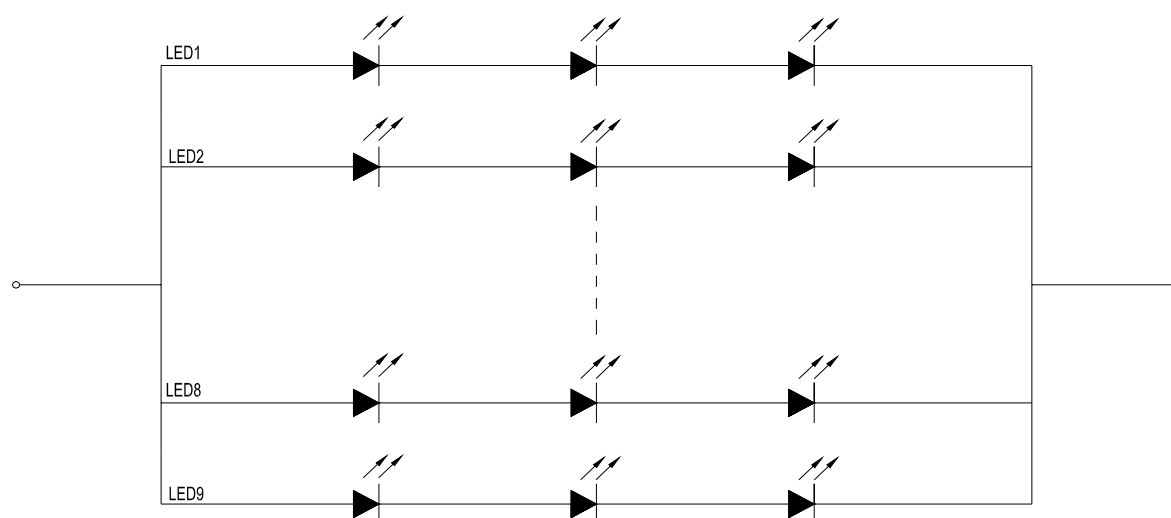
Note 2: The "LED life time" is defined as the module brightness decrease to 50% original brightness that the ambient temperature is 25 and I_L =20mA.
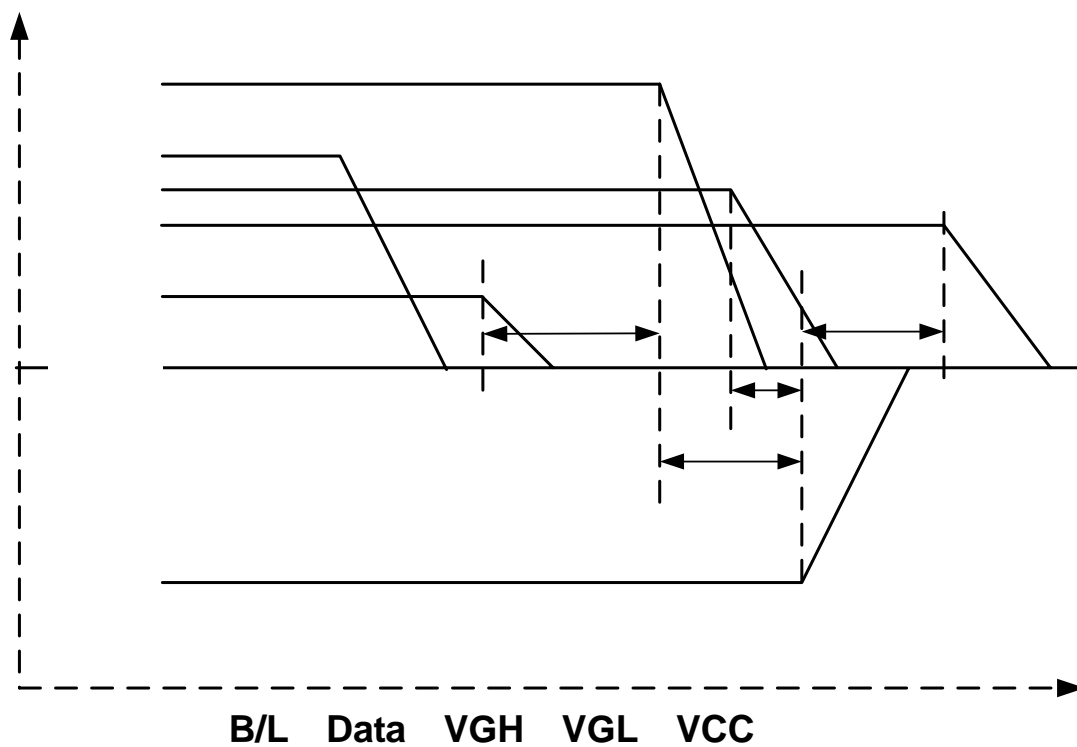
3.2. Power Sequence

3.2.1. Power on:

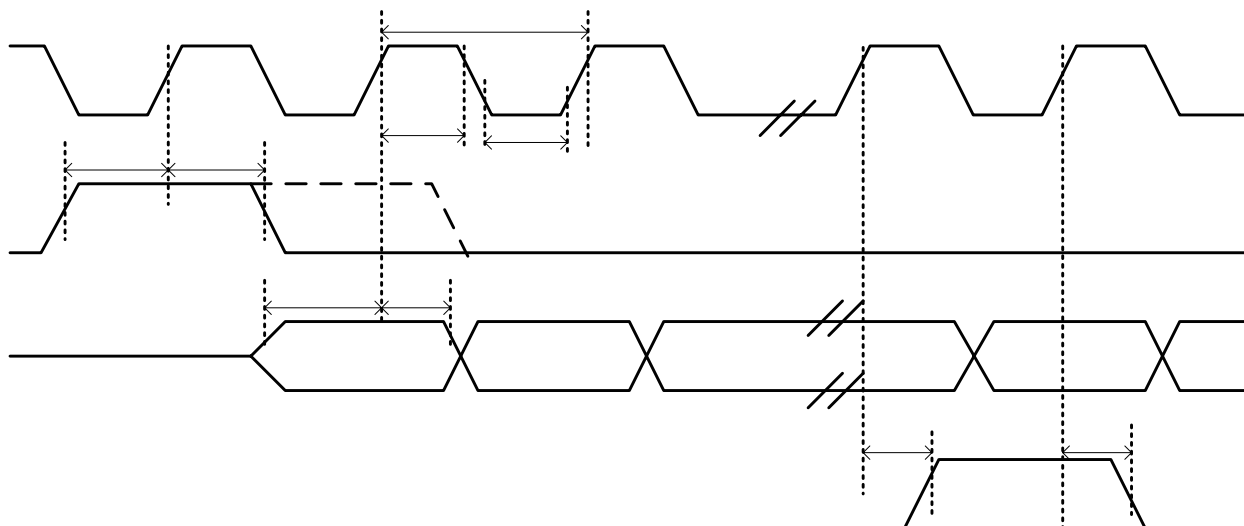**The copyright belongs to InnoLux. Any unauthorized use is prohibited.**

VCC   VGL   VGH   Data   B/L

3.2.2.   Power off:

B/L   Data   VGH   VGL   VCC
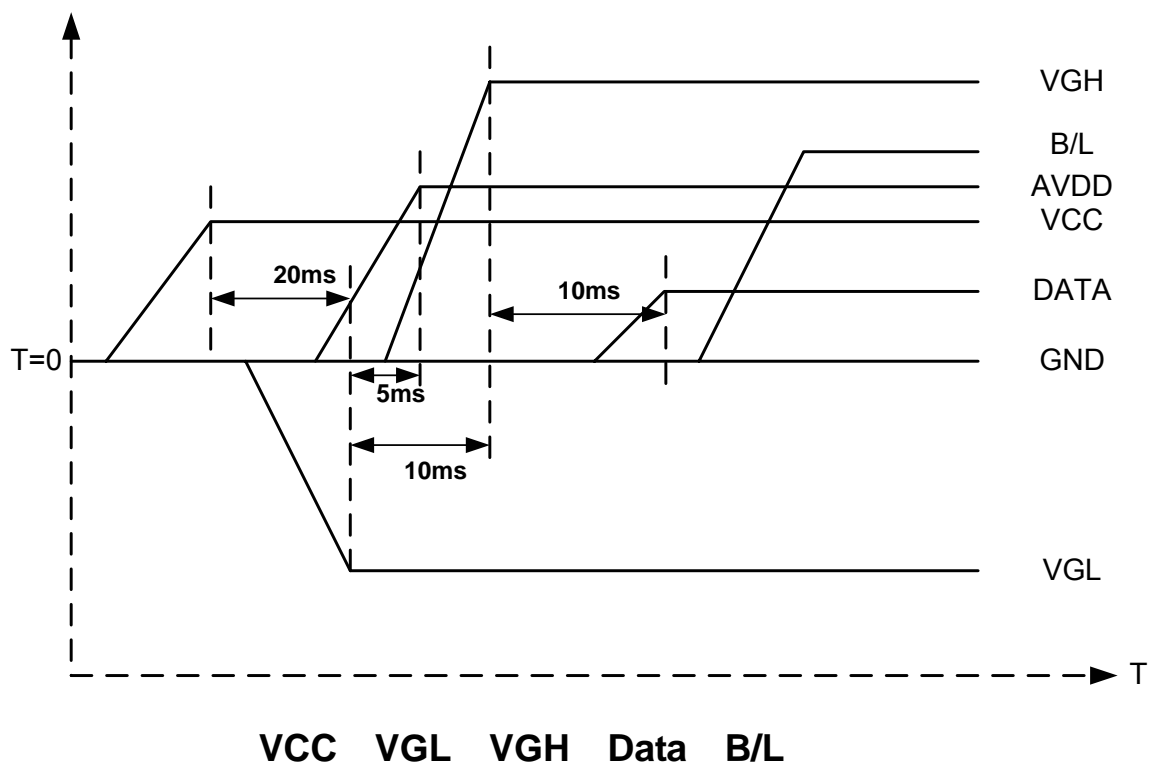
3.3. Timing Characteristics

3.3.1. Timing Conditions

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
DCLK frequency	Fclk	-	40	45	MHz	
DCLK cycle	Tcph	22	25	-	ns	
DCLK pulse width	Tcw	8	-	-	ns	
Data set-up time	Tsu	4	-	-	ns	
Data hold time	Thd	2	-	-	ns	
Time that the last data to LD	Tld	1	-	-	Tcph	
Pulse width of LD	Twld	2	-	-	Tcph	
Time that LD to STVD/U	Tlds	5	-	-	Tcph	
POL set-up time	Tpsu	6	-	-	ns	
POL hold time	Tphd	6	-	-	ns	
OEV pulse width	Toev	1	-	-	us	
CKV pulse width	Tckv	2.5	-	-	us	
Horizontal display timing range	Tdh	-	800	-	Tcph	
Horizontal timing range	Th	-	1056	-	Tcph	
STV setup time	Tsuv	700	-	-	ns	
STV hold time	Thdv	700	-	-	ns	
Horizontal lines per field	Tv	628	635	650	Tdh	
Vertical display timing range	Tvd	-	600	-	Tdh	

INNOLUX

3.3.2. Timing Diagram

EDGSL=L or open

EDGSL=H

CLK

70%

Tsu

Thd

STHL/R 70%

(input)

70%

Data REV

INNO**L**UX

70%

Last

CLK

Tl

LD

STHL/R

(input)

CKV
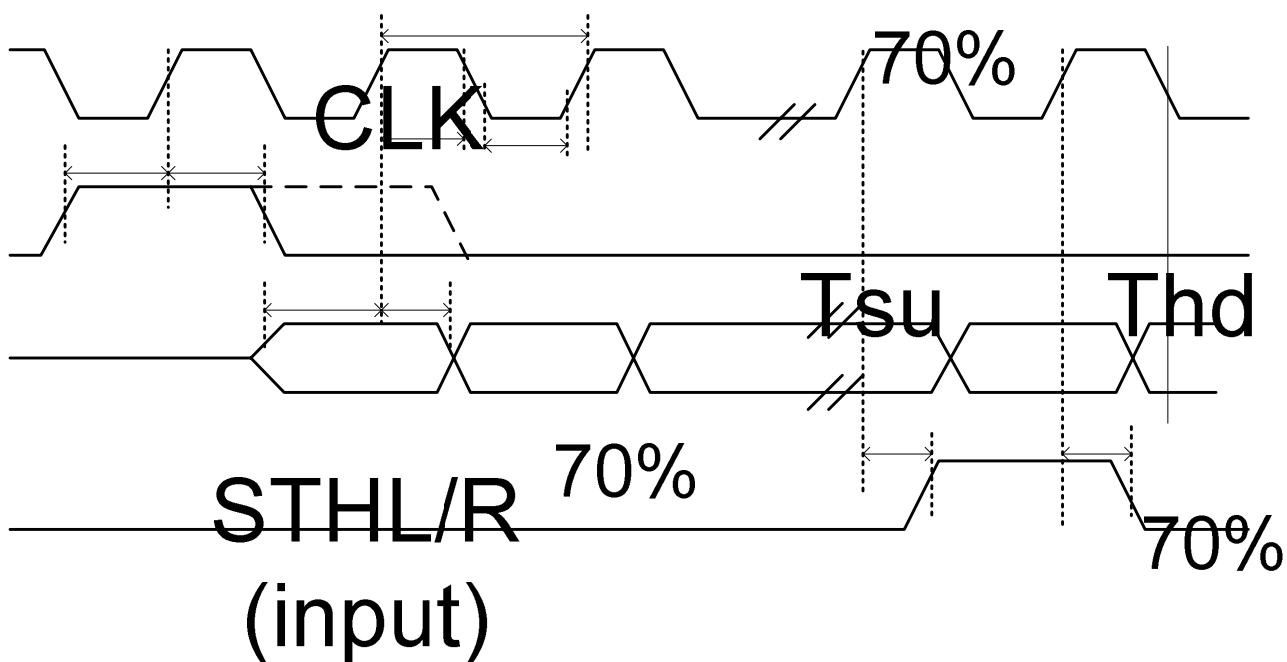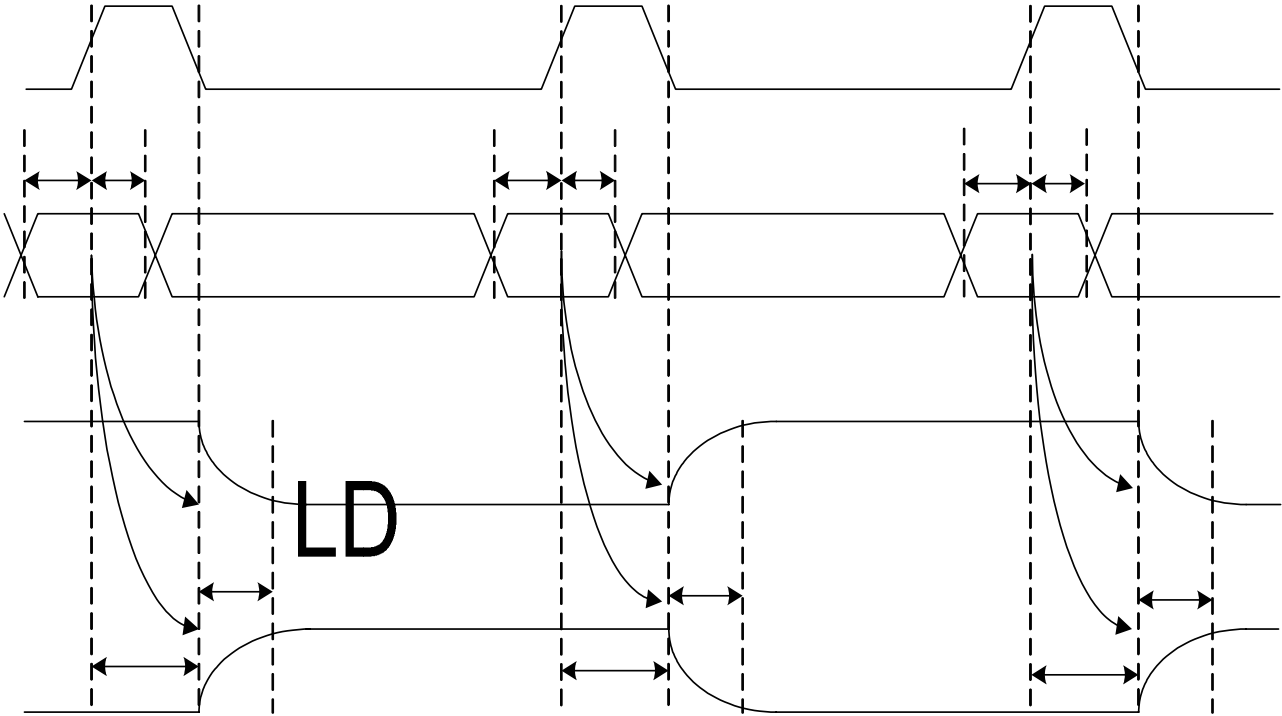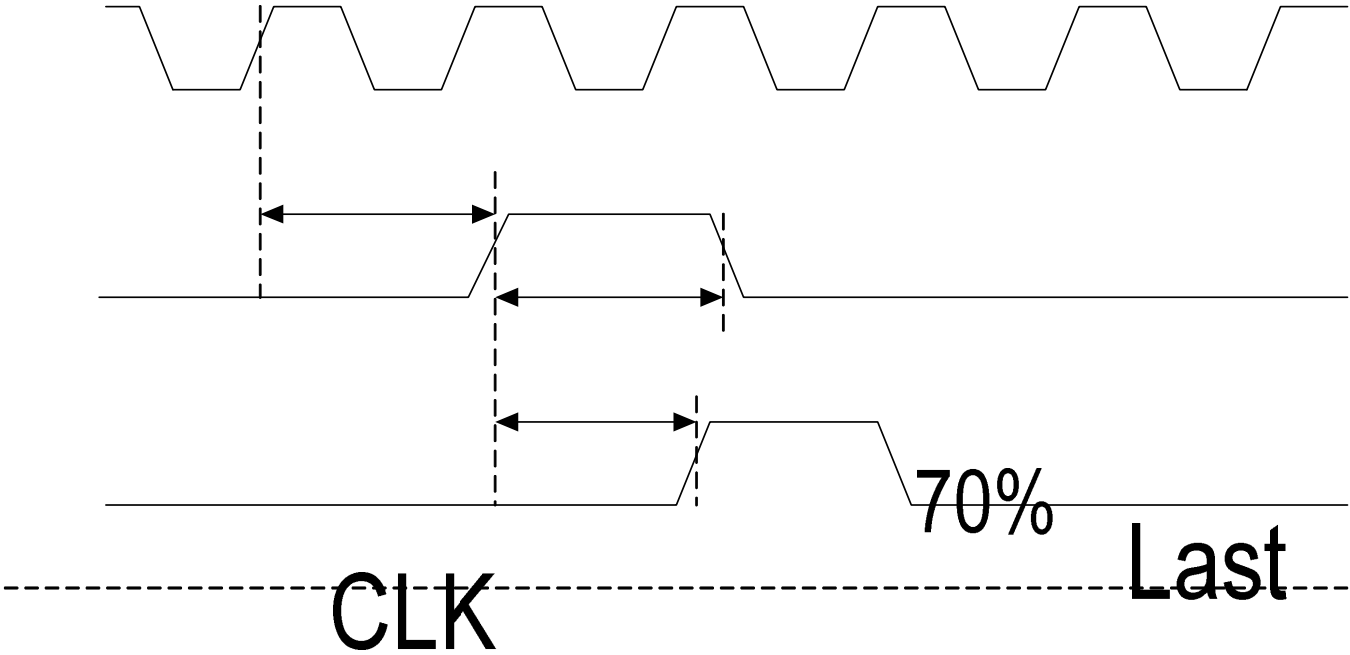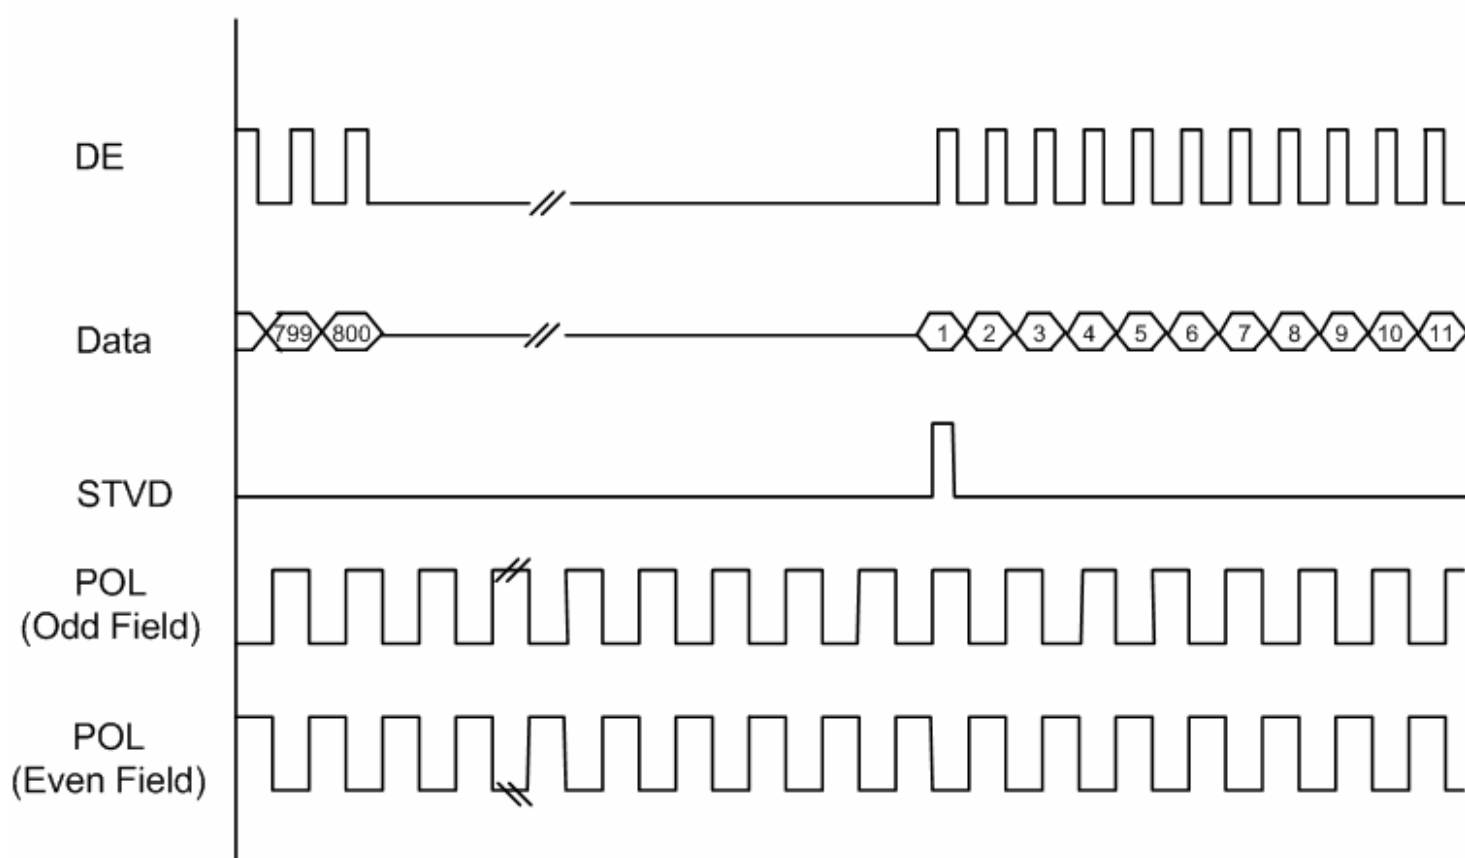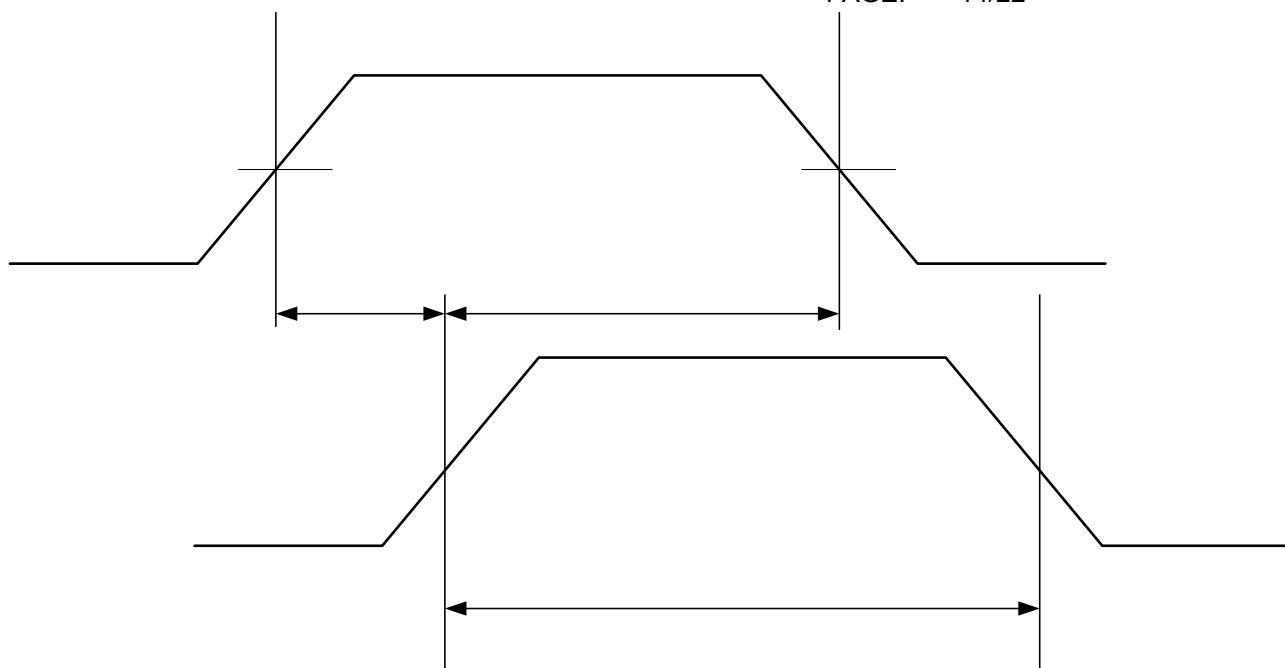
4. Optical Specifications

Item	Symbol	Condition	Values			Unit	Remark
			Min.	**Typ.**	**Max.**		
Viewing angle (CR≥ 10)	θ$_L$	Φ=180°(9 o'clock)	(60)	(70)	-	degree	Note 1
	θ$_R$	Φ=0°(3 o'clock)	(60)	(70)	-		
	θ$_T$	Φ=90°(12 o'clock)	(40)	(50)	-		
	θ$_B$	Φ=270°(6 o'clock)	(60)	(70)	-		
Response time	T$_{ON}$	Normal θ=Φ=0°	-	(10)	TBD	msec	Note 3
	T$_{OFF}$		-	(15)	TBD	msec	Note 3
Contrast ratio	CR		(400)	(500)	-	-	Note 4
Color chromaticity	W$_X$		(0.26)	(0.31)	(0.36)	-	Note 2 Note 5 Note 6
	W$_Y$		(0.28)	(0.33)	(0.38)	-	
Luminance	L		200	(250)	-	cd/m²	Note 6
Luminance uniformity	Y$_U$		70	75	-	%	Note 7

Test Conditions:
1. V$_{CC}$=3.3V, I$_L$=20mA (Backlight current), the ambient temperature is 25   .
2. The test systems refer to Note 2.

Note 1: Definition of viewing angle range

Fig. 4-1 Definition of viewing angle
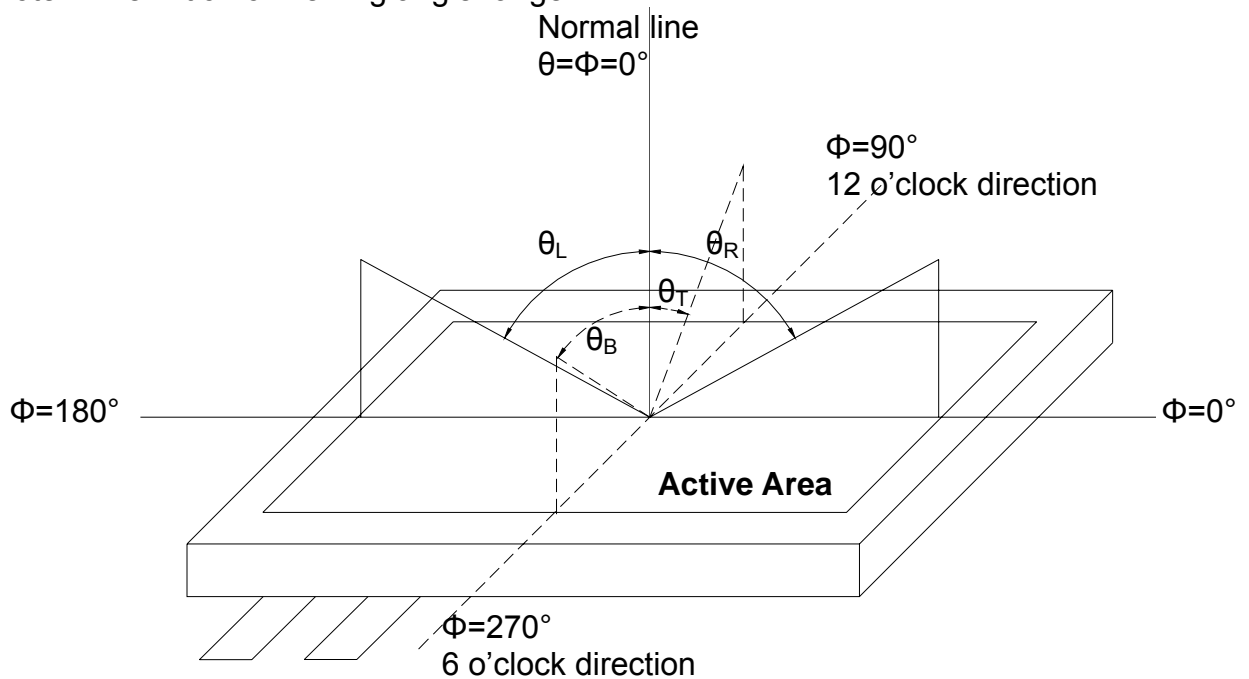
Note 2: Definition of optical measurement system.

     The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view: 1° /Height: 500mm.)
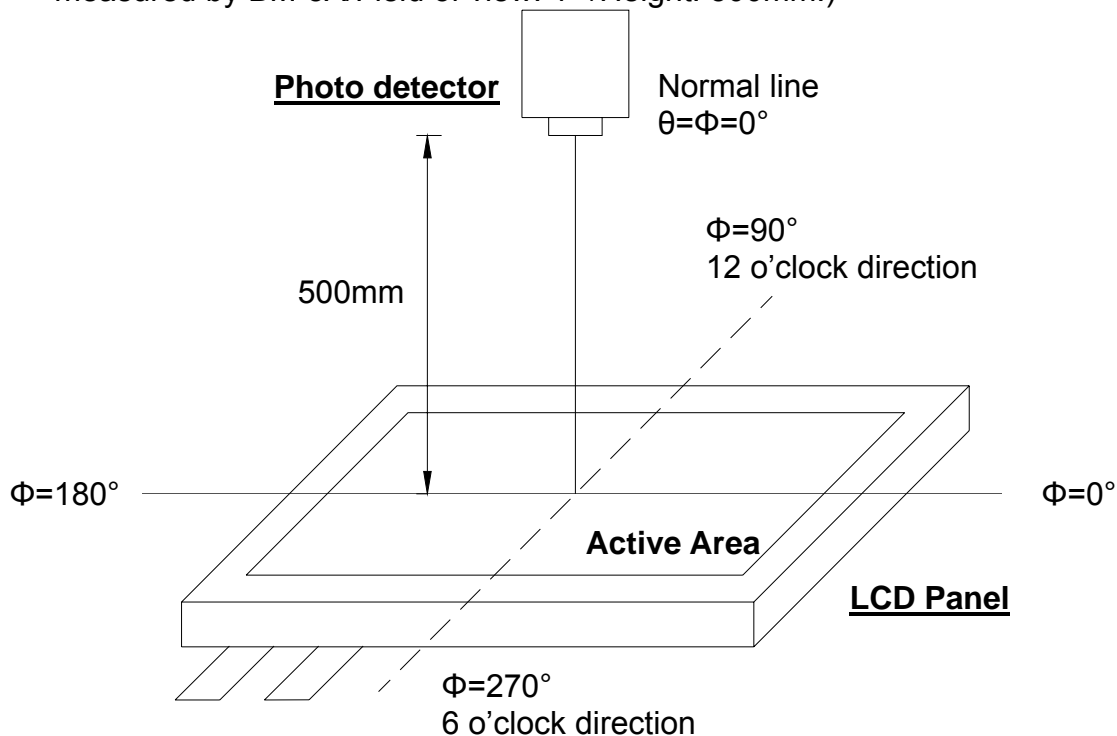
Fig. 4-2 Optical measurement system setup

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.
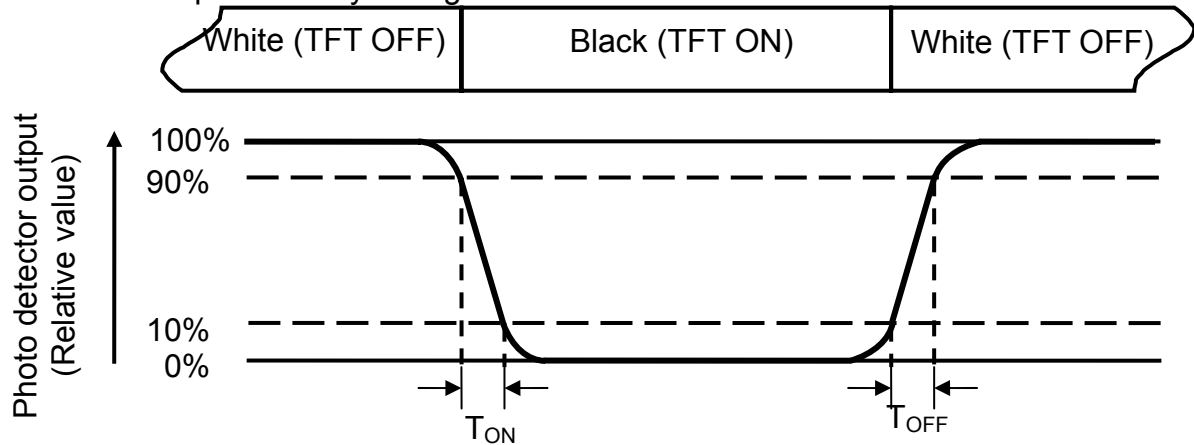
Fig. 4-3 Definition of response time

Note 4: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of color chromaticity (CIE1931)
Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel.

Note 7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to Fig. 4-4).Every measuring point is placed at the center of each measuring area.

$$Luminance\ Uniformity\ (Yu) = \frac{B_{min}}{B_{max}}$$

L-------Active area length   W----- Active area width

Fig. 4-4 Definition of measuring points

B$_{max}$: The measured maximum luminance of all measurement position.
B$_{min}$: The measured minimum luminance of all measurement position.

INNOLUX

5. Reliability Test Items

(Note3)

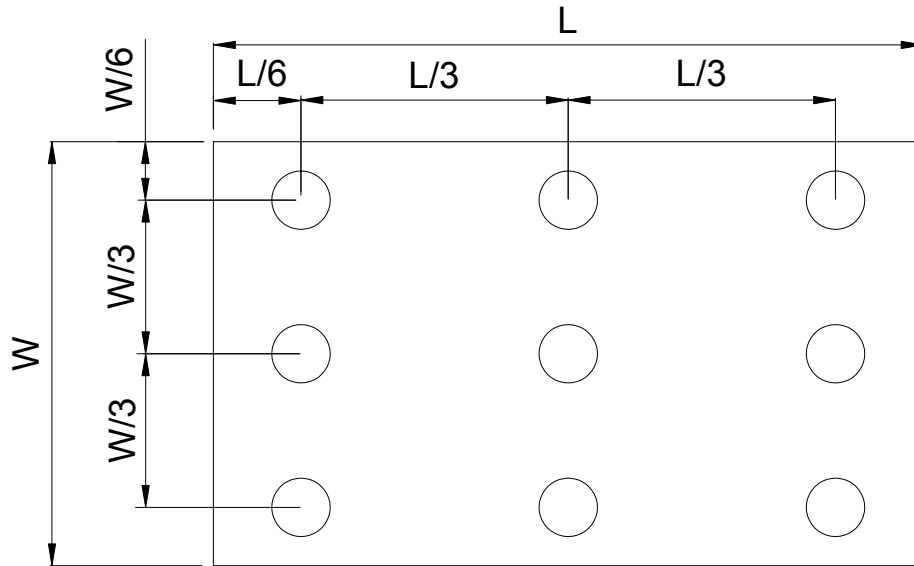| Item	Test Conditions	Remark
High Temperature Storage	Ta = (95) 240 hrs	Note 1
Low Temperature Storage	Ta = (-40) 240hrs	Note 1
High Temperature Operation	Ts = (85) 240hrs	Note 2
Low Temperature Operation	Ta = (-30) 240hrs	Note 1
Operate at High Temperature and Humidity	+60 , 90%RH 240hrs	
Thermal Shock	-40 /30 min ~ +95 /30 min for a total 100 cycles, Start with cold temperature and end with high temperature.	
Vibration Test	Frequency range:10~55Hz Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X. Y. Z. (6 hours for total)	
Mechanical Shock	100G 6ms,±X, ±Y, ±Z 3 times for each direction	
Package Vibration Test	Random Vibration : 0.015G*G/Hz from 5-200HZ, -6dB/Octave from 200-500HZ 2 hours for each direction of X. Y. Z. (6 hours for total)	
Package Drop Test	Height:60 cm 1 corner, 3 edges, 6 surfaces	
Electro Static Discharge	± 2KV, Human Body Mode, 100pF/1500Ω	

Note 1: Ta is the ambient temperature of samples.
Note 2: Ts is the temperature of panel's surface.
Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.

6. General Precautions

6.1.   Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

6.2.   Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.

2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.

3. To avoid contamination on the display surface, do not touch the module surface with bare hands.

4. Keep a space so that the LCD panels do not touch other components.

5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.

6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.

7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

6.3.   Static Electricity

1. Be sure to ground module before turning on power or operating module.

2. Do not apply voltage which exceeds the absolute maximum rating value.

6.4.   Storage

1. Store the module in a dark room where must keep at 25±10   and 65%RH or less.

2. Do not store the module in surroundings containing organic solvent or corrosive gas.

3. Store the module in an anti-electrostatic container or bag.

6.5.   Cleaning

1. Do not wipe the polarizer with dry cloth. It might cause scratch.

2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

INNOLUX

7. Mechanical Drawing
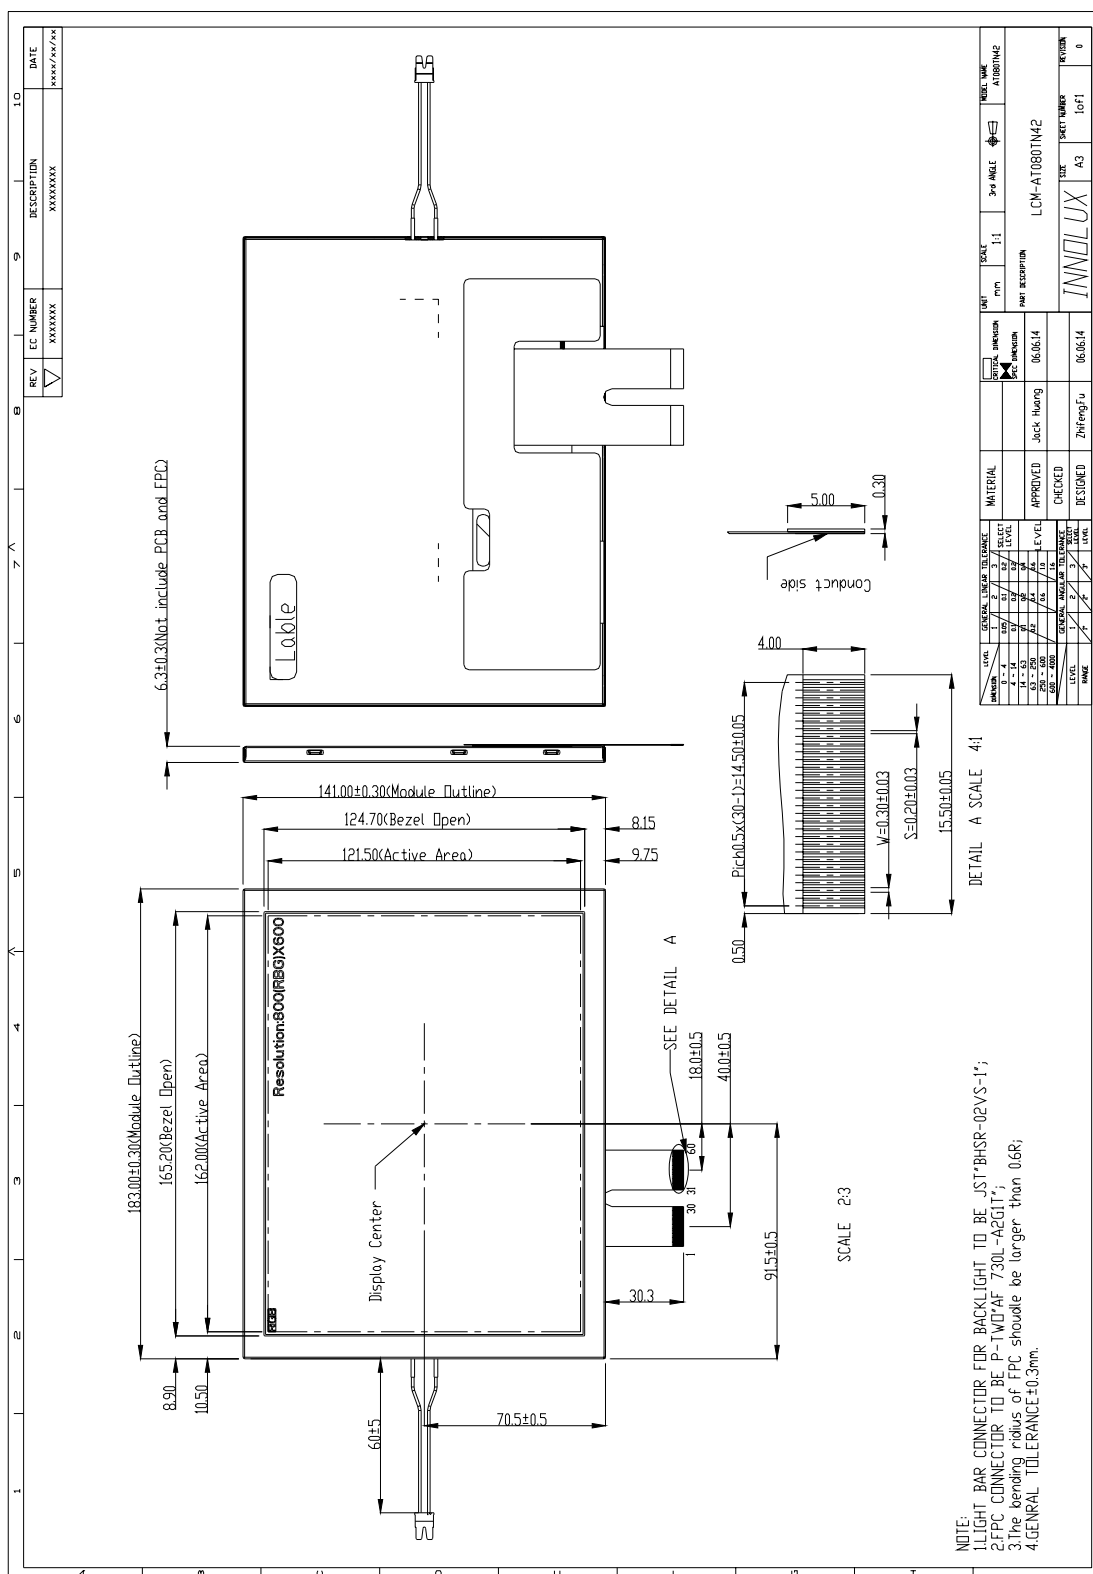
8. Package Drawing

TBD

INNOLUX DISPLAY CORPORATION
LCD MODULE
SPECIFICATION

Customer:

Model Name: T-CON Board
(TDN025012 For 8"D 4:3 LCM)

SPEC NO.:

Date: 2006/09/25

Version: 01

Preliminary Specification
Final Specification

Approved by	Reviewed by	Prepared by

Record of Revision

Version	Revise Date	Page	Content
01	2006/09/25		Initial Release

Contents:

1.1. T-CON Board Block Drawing

TO LCM

| J201 | | J202 |

| T-CON |

PWM Controller

GAMMA Circuit

| CN203 |

40 1

Input
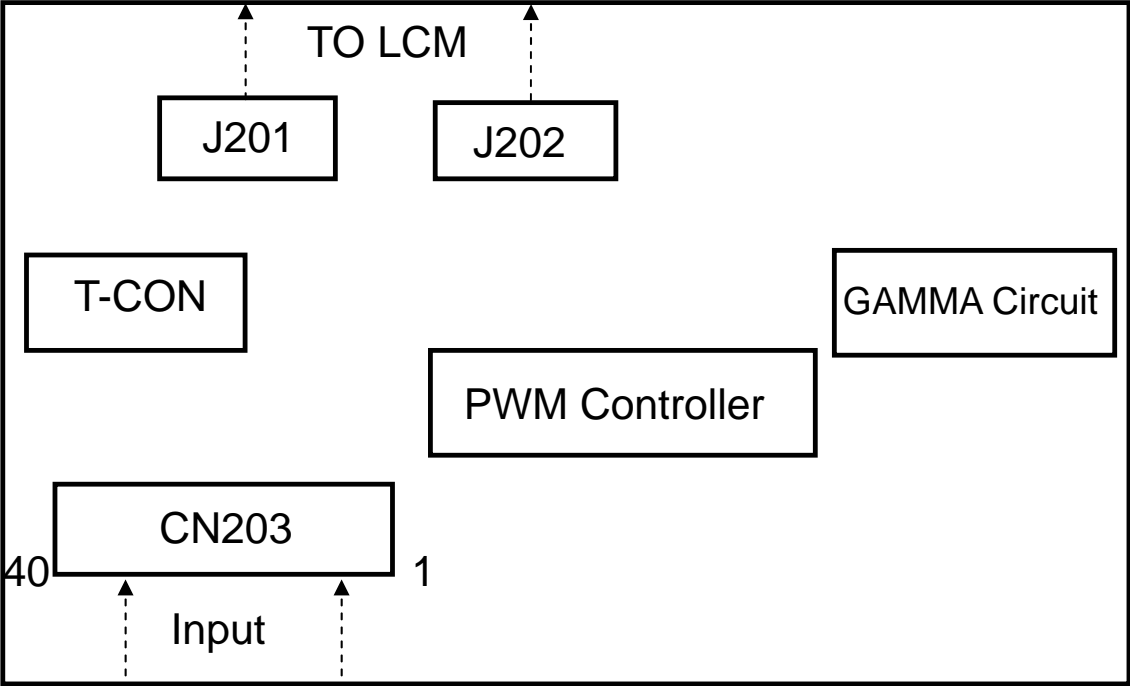
1.2. Pin Assignment (Connector 203:F09-40 2R)

Pin No.	Symbol	I/O	Function	Remark
1	GND	P	Power ground	
2	GND	P	Power ground	
3	NC		NC	
4	VCC	I	Power supply for digital circuit(3.3V)	Note1
5	VCC	I	Power supply for digital circuit(3.3V)	Note1
6	VCC	I	Power supply for digital circuit(3.3V)	Note1
7	VCC	I	Power supply for digital circuit(3.3V)	Note1
8	NC		NC	
9	DE	I	Date enable	
10	GND	P	Power ground	
11	GND	P	Power ground	
12	GND	P	Power ground	
13	BI5	I	Blue data input (MSB)	
14	BI4	I	Blue data input	
15	BI3	I	Blue data input	
16	GND	P	Power ground	
17	BI2	I	Blue data input	
18	BI1	I	Blue data input	
19	BI0	I	Blue data input(LSB)	
20	GND	P	Power ground	

21	GI5	I	Green data input(MSB)	
22	GI4	I	Green data input	
23	GI3	I	Green data input	
24	GND	P	Power ground	
25	GI2	I	Green data input	
26	GI1	I	Green data input	
27	GI0	I	Green data input(LSB)	
28	GND	P	Power ground	
29	RI5	I	Red data input(MSB)	
30	RI4	I	Red data input	
31	RI3	I	Red data input	
32	GND	P	Power ground	
33	RI2	I	Red data input	
34	RI1	I	Red data input	
35	RI0	I	Red data input(LSB)	
36	GND	P	Power ground	
37	GND	P	Power ground	
38	DCLK	I	Sample clock	
39	GND	P	Power ground	
40	GND	P	Power ground	

Note: I: input,   O: output,   P: Power
Note1: Typ. Vcc=3.3V, Min. Vcc=3.0V, Max. Vcc=3.6V

1.3. Current Consumption

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Current for Driver	I_{VCC}	200	230	280	mA	$V_{VCC} = 3.3V$

1.4. Timing Characteristics

1.4.1. Timing Condition

	Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
			Values				
DCLK	Period	t_{CLK}	-	25	25	ns	
	Frequency	f_{CLK}	-	40	40	MHz	
	Low Level Width	t_{WCL}	6	-	-	ns	
	High Level Width	t_{WCH}	6	-	-	ns	
	Rise, Fall Time	t_{CLKr}, t_{CLKf}	-	-	3	ns	
	Duty	-	0.45	0.50	0.55	-	t_{CLKL} / t_{CLK}
DE (Data Enable)	Setup Time	t_{DES}	5	-	-	ns	
	Hold Time	t_{DEH}	10	-	-	ns	
	Rise, Fall Time	t_{DEr}, t_{DEf}	-	-	16	ns	
	Horizontal Period	t_{HP}	-	1000	-	t_{CLK}	
	Horizontal Valid	t_{HV}		800			
	Horizontal Blank	t_{HBK}		t_{HP} -t_{HV}			
	Vertical Period	t_{VP}	-	660	-	t_{HP}	
	Vertical Valid	t_{W}		600			
	Vertical Blank	t_{VBK}		t_{VP},t_{W}			
Data	Setup Time	t_{DS}	5	-	-	ns	
	Hold Time	t_{DH}	10	-	-	ns	
	Rise, Fall Time	t_{Dr}, t_{Df}	-	-	3	ns	

1.4.2. Timing Diagram

INNOLUX

1.5. Mechanical Drawing (T-CON Board)

Note:
1. TCB thickness : 0.50±0.05;
2. ▭▭▭ 40 Pin Connector : F09-40 2R ;
3. ▨▨ Compenent Free Area ;
4. Check items 1-3;

50.99

39.00

15.60±0.10

110.00±0.20 ①

107.90

97.90

83.80

38.07±0.05

33.00

68.00

13.50

35.00

50.00±0.20 ②

2.7±0.20 ③

0.50±0.05

40

31.30

60

				GENERAL LINEAR TOLERANCE				
LEVEL		1	2	3		SELLECT LEVEL		
DIMENSION								
0 ~ 4		0.05	0.1	0.2				
4 ~ 14		0.1	0.2	0.4		2		
14 ~ 63		0.1	0.2	0.4				
63 ~ 250		0.2	0.4	0.6				
250 ~ 600			0.6	1.0				
600 ~ 4000				1.6				

	GENERAL ANGULAR TOLERANCE			SELECT LEVEL	
LEVEL	1	2	3		
RANGE	1°	2°	3°		NA

3rd ANGLE

MODEL NAME

REV	EC NUMBER	DESCRIPTION	DATE
▽	XXXXXX	XXXXXXX	xxxx/xx/xx
		XXXXXXXX	

CRITICAL DIMENSION
SPEC DIMENSION

MATERIAL		
APPROVED	Jack.Huang	2006/08/25
CHECKED		
DESIGNED	Zhifeng Fu	2006/08/25

UNIT mm
SCALE 1:1
PART NUMBER
PART DESCRIPTION T-con Board Assembly

INNOLUX

SIZE A4
SHEET NUMBER 1 of 1
REVISION 0

The copyright belongs to InnoLux. Any unauthorized use is prohibited.

1.6.   Mechanical Drawing (LCM+ T-CON Board)

NOTE:
1.LIGHT BAR CONNECTOR FOR BACKLIGHT TO BE JST*BHSR-02VS-1*;
2.FPC CONNECTOR TO BE P-TWO*AF 730L-A2G1T*;
3.The bending radius of FPC shoudle be larger than 0.6R;
4.CN1 is 40 Pin Connector : F09-40 2R ;
5.GENRAL TOLERANCE±0.3mm.