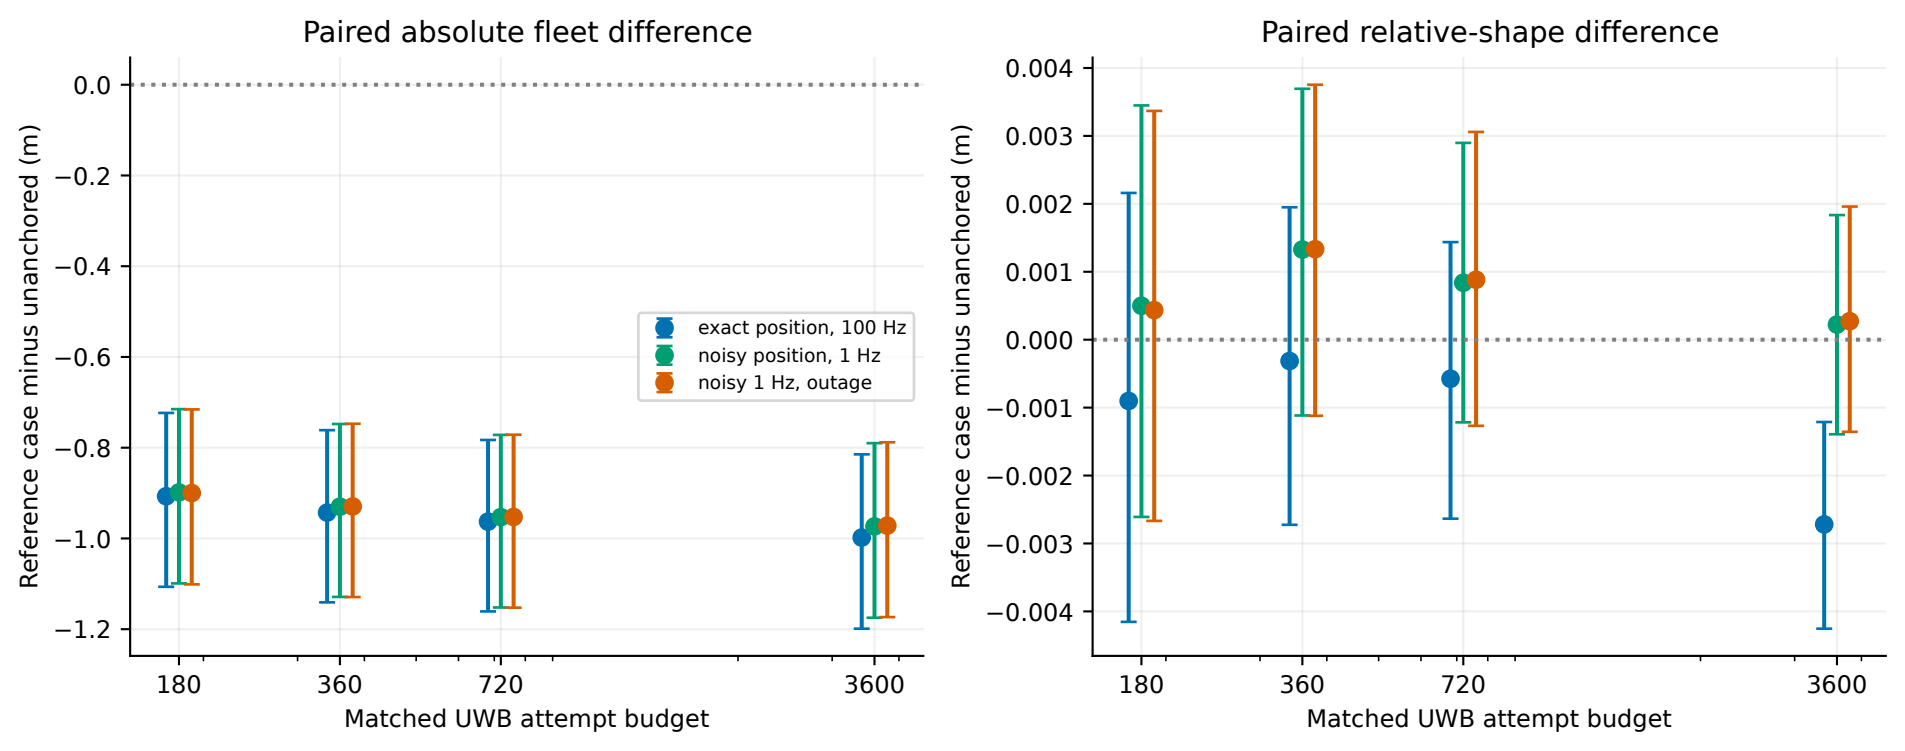
Paired absolute fleet difference
Reference case minus unanchored (m)
0.0
−0.2
−0.4
−0.6
−0.8
−1.0
−1.2
exact position, 100 Hz
noisy position, 1 Hz
noisy 1 Hz, outage
180
360
720
3600
Matched UWB attempt budget
Paired relative-shape difference
Reference case minus unanchored (m)
0.004
0.003
0.002
0.001
0.000
−0.001
−0.002
−0.003
−0.004
180
360
720
3600
Matched UWB attempt budget