

Versatile Marking on a Range of Materials

VANADATE LASER MARKING SYSTEM

Low-cost engraving and annealing for a wide array of product materials including ferrous and non-ferrous metal, label materials, and silicon

Precise setting controls for fine-tuned application versatility: Engraving, annealing, surface marking, and color marking

Very small HAZ (heat-affected zone) provides additional **flexibility with heat-sensitive and delicate components**

Models

EVCDS

Technology Options

Vari-Z™ 3-Axis
Mark-on-the-Fly Technology
Programmable Mounting Post

Controllers

E15 External PC
E15E Embedded PC

Software

Proprietary Merlin® II LS




Lens Configurations

Diameter	Marking Area				Working Clearance	
100 mm*	2.56 in	x	2.56 in	65 mm x 65 mm	3.82 in	97 mm
160 mm*	4.33 in	x	4.33 in	110 mm x 110 mm	6.93 in	176 mm
160 mm	4.33 in	x	4.33 in	110 mm x 110 mm	7.13 in	181 mm
254* mm	6.89 in	x	6.89 in	175 mm x 175 mm	11.65 in	296 mm
254 mm	6.89 in	x	6.89 in	175 mm x 175 mm	11.5 in	292 mm
330* mm	9.06 in	x	9.06 in	230 mm x 230 mm	15.24 in	387 mm
420* mm	11.42 in	x	11.42 in	290 mm x 290 mm	19.41 in	493 mm

* Premium Lens

Dimensions

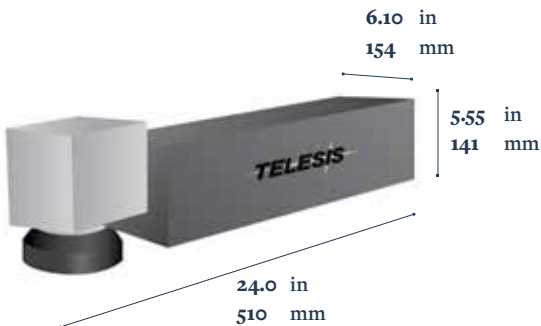

DUAL-HEAD

FIBER

VANADATE

GREEN

UV

CO₂

ENCLOSURES

