

A Large Marking Window

The Original PINSTAMP® TMP3200


- Simple yet robust** belt-driven dual rail
- X/Y platform yields **high-quality characters**
- Rugged design means **long-lasting, low-maintenance operation**
- Marks a wide range of materials** from soft plastics to hardened steel (rc60)
- Floating pin technology easily **accommodates surface irregularities** up to 0.25 in (6 mm)

Additional Features

- TMP3200EAS: Available as electric model
- Dot Density: Up to 200 dots-per-inch (79 dots per centimeter)
- Choice of interchangeable marking pins: .001 in - .018 in (0.03 mm - 0.34 mm)
- Marking speeds up to four characters per second
- Automatically generates serial numbers, time, date, and shift codes

Controllers

- TMC470**
Fixed Button Controller
- TMC520**
Touch Screen Controller Powered by Merlin®
- PC**
w/ Merlin®

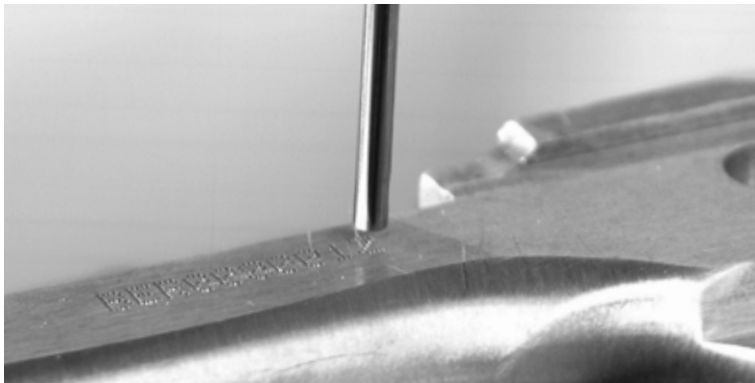

Options and Accessories

- Rotary fixtures for marking circumferences of cylindrical parts
- Marking head mounting post, including programmable Z-axis
- Panel-mount and IP/NEMA-rated controllers
- Easy and free software upgrades

Marking Window



Marking Specifications

Max Character Depth	0.013 in 0.33 mm
Max Character Height	4.0 in 101.6 mm
Characters per Second	4
Resolution	200 dpi

