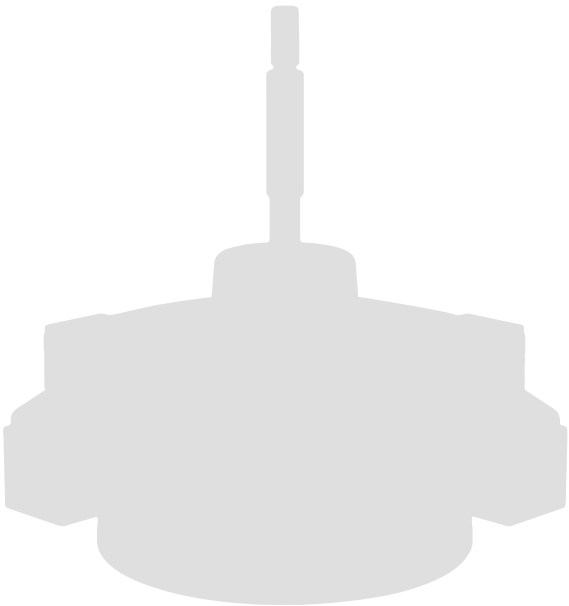


Welling 威灵

Welling 威灵



2025

威灵电机产品手册

Welling Motor Product Catalog >>>



本资料相关技术数据仅供参考，实际数据以我司最新的产品规格书为准
The data of this catalog is for reference only,the actual data is subject to the latest specification document



环保纸张 Recyclable
可回收资源 Made from recycled content

欲了解最新产品技术信息，请访问官方网站：www.wellingmotor.com
For technical details about the latest products, please visit website: www.wellingmotor.com

目录 Contents



01

公司简介
COMPANY PROFILE

03

科技驱动
TECHNOLOGY DRIVEN

05

产品命名规则
PRODUCT NAMING RULES

07

家用空调电机
Home Air Conditioner Motor

19

商用空调电机
Commercial Air Conditioner Motor

25

滚筒洗衣机电机
Drum Washing Machine Motor

29

波轮洗衣机电机
Pulsator Washing Machine Motor

31

干衣机电机
Dryer Motor

33

洗碗机电泵
Dishwasher Pump

35

热泵热水器风机
HP Water Heater Fan

36

热泵采暖风机、循环泵
HP Heating Fan & Circulating Water Pump

37

商用空调排水泵
Commercial Air Conditioner Drainage Pump

38

其他
Others

41

安装方式
Installation Method

42

联系我们
CONTACT US

关于我们 | About Us

GMCC 美芝 &Welling 威灵 &MR 美仁，作为暖通家电核心部件系统级解决方案供应商，坚持绿色创新，持续升级核芯科技，为客户提供可靠、绿色、高效、智慧的全品类压缩机、阀、全品类电机和芯片等产品及解决方案，助力行业健康发展、产业持续升级。




GMCC & Welling & MR are integrated core component solution suppliers for HVACR and appliance, adheres to green innovation, continuously upgrades core technology, provides customers with reliable, green, efficient and intelligent products and solutions such as all kinds of compressors, valves, motors and chips, and helps the healthy development of the industry and the continuous upgrading of the industry.

我们的产品应用 | Product




产品广泛应用于家用电器、商用制冷制热和移动制冷等领域，如各类空调、冰箱、洗衣机、冷冻冷藏柜、热泵采暖、热泵热水器、除湿机、干衣机、饮水机、油烟机、洗碗机、冷藏汽车、驻车空调、房车空调等。

The products are widely used in household appliances, commercial refrigeration and heating, mobile refrigeration and other fields, such as various air conditioners, refrigerators, washing machines, refrigerators, heat pump heating, heat pump water heaters, dehumidifiers, clothes dryers, water dispensers, range hoods, dishwashers, refrigerated cars, parking air conditioners, RV air conditioners, etc.

GMCC 转子&涡旋压缩机
Rotary & Scroll Comp.




 家用空调压缩机 Household A/C Comp.	 商用空调压缩机 Commercial A/C Scroll Comp.	 除湿机压缩机 Dehumidifier Comp.	 热泵采暖压缩机 HP Heating Comp.	 热泵热水器压缩机 HP Water Heater Comp.	 热泵干衣机压缩机 HP Dryer Comp.	 微型压缩机 Micro Comp.	 车载空调压缩机 Car A/C Comp.
---	---	---	--	--	---	---	---

GMCC 往复压缩机
Recip Comp.







 家用冰箱压缩机 Household Refrigerator Comp.	 家用冷柜压缩机 Household Freezer Comp.	 除湿机压缩机 Dehumidifier Comp.	 轻商设备压缩机 Commercial Comp.	 车载冰箱压缩机 Car Refrigerator Comp.	 房车冰箱压缩机 RV Refrigerator Comp.
--	---	---	--	--	---

GMCC 电子膨胀阀
EEV

美仁芯片
MR chip

 电子膨胀阀 EEV	 电子膨胀阀 EEV	 电子膨胀阀 EEV	 电子膨胀阀 EEV	 主控、触控、变频MCU Control, Touch, Motor Control MCU	 智能功率模块 IPM
---	---	---	---	---	--

Welling 电机
Motor

 家用空调电机 Household A/C Motor and Fan	 商用空调电机 Commercial A/C Motor	 热泵采暖风机、循环泵 HP Heating Fan & Circulating Water Pump	 热泵热水器风机 HP Water Heater Fan	 波轮/滚筒洗衣机电机 Pulsator / Drum Washing Machine Motor	 干衣机电机 Dryer Motor	 油烟机电机 Range Hood Motor	 洗碗机电泵 Electric Pump for Dishwasher
--	---	--	---	--	---	--	--

 **1950+**
电机授权专利
Authorized patents in
motor technology

 **10x**
2012~2024连续荣获艾普兰奖
Winner of the AWE Award
from 2012-2024



为保持核心科技竞争力，Welling 持续投入创新，不断在环保、高效、小型、智能和静音等方面进行技术研发和产品升级。

In order to maintain its core technologic competitiveness , Welling continues to invest in innovation, continues to develop and upgrade its products regarding eco friendliness, efficiency, size, intelligence and noise.

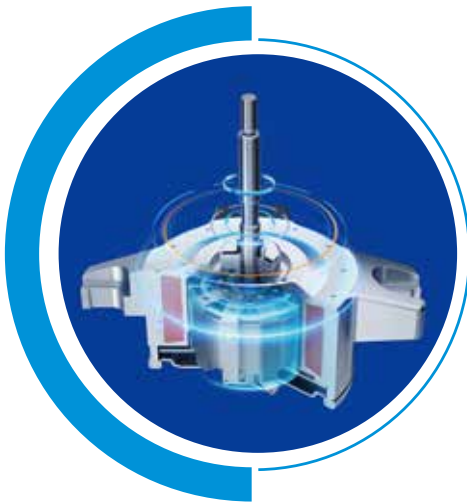
 **0.1s**
0.1秒下线1台电机
0.1 second offline one motor

 **6+6+2**
6大基础实验室+6大产品实验室
失效分析中心、电控可靠性中心
6 basic laboratories +6 product laboratories
Failure analysis center
electronic control reliability center



Welling 不断创新生产工艺，打造精益化、信息化、自动化的智能工厂，制造水平持续升级，为全球客户提供优质可靠的产品。


Welling constantly innovates its production process, builds a lean, information-based and automated intelligent factory, and continuously upgrades its manufacturing level to provide high-quality and reliable products for customers around the world.



高舒适性变频电机技术 静音高效，助力空调升级

High Comfort Variable Frequency Motor Technology
Silent and efficient, helping upgrade air conditioning

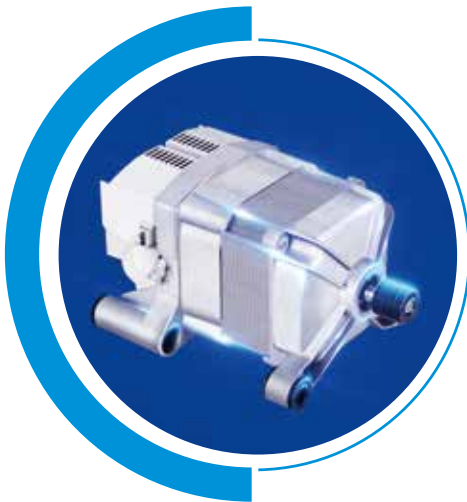- Welling不断升级家用和商用BLDC电机技术
体积更小，效率更高，极致静音
Welling Continuously Upgrades Home and
Commercial BLDC Motor Technology for Smaller Size,
Higher Efficiency, and Ultimate Silence



滚筒BLDC电机电控技术 助力洗衣机智能化高端发展

Electric Control Technology of Drum BLDC Motor
Boost the intelligent high-end development
of washing machines

- 无位置传感器变频控制技术&智能称重&智能偏心感知，
让洗涤更智能、高效、低噪
Sensorless frequency conversion control technology
&intelligent weighing&intelligent eccentric sensing,
making washing more intelligent, efficient, and low noise



系统化风机及泵设计技术 助力开拓热泵等新领域应用

Systematic design technology of EC fan and pump
Helps expand the application of heat pump products in new fields.

- 高绕组系数极槽配合&全流道CFD优化&高集成FOC电控模块，
打造高静音EC风机；智能控制实时反馈系统循环水流，与热泵
系统联动提高供暖效率及稳定性
High winding coefficient pole groove coordination & full channel CFD optimization
& highly integrated FOC electronic control module to create a highly silent EC fan.
The intelligent control of system linkage and the real-time feedback of circulating
water flow create an efficient and stable circulating pump.

命名规则

Model Naming Rules

1.1 电机类型

“Y”表示异步电机、“Y”表示感应泵；
“H”表示串激电机、“H”表示串激泵；
“Z”表示无刷直流电机、“Z”表示无刷直流泵；
“D”表示有刷直流电机、“D”表示有刷直流泵。

1.1 Motor type

"Y" refers to the asynchronous motor, "Y" refers to the induction pump;
"H" refers to the universal motor, "H" refers to the universal pupm;
"Z" refers to the brushless DC motor, "Z" refers to the brushless DC pump;
"D" refers to the brush DC motor, "D" refers to the brush DC pump.

1.2 使用行业和分类代号

- 使用行业各字符代表的含义：

“K”表示空调类用电机；“B”表示冰箱类用电机；
“X”表示洗涤类用电机；“S”表示生活类用电机；
“C”表示厨房类用电机；“G”表示工具类用电机。

说明：提升生活质量和舒适度的终端所用的电机为生活类电机，围绕食品或饮品加工处理的终端所用的电机为厨房类用电机。

1.2 Applicable industry and classification code (see 1.2)

- The meaning of each character in applicable industry:

"K" refers to the motor used in the air conditioner; "B" refers to the refrigerator motor;
"X" refers to the motor used for washing; "S" refers to the motor used for living;
"C" refers to the motor used in the kitchen; "G" refers to the motor used for tools.

Description: Motors used on terminals that can improve living quality and comfortability belong to the living ones, while those used for food or beverage processing are the kitchen ones.

- 分类代号各字符代表的含义：

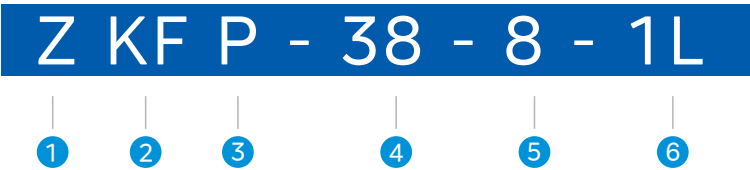
“F”表示塑封电机或表示风扇、冷风扇、吊扇电机、冰箱电机；
“B”表示波轮电机或泵类；
“Y”表示冰压机电机、空压机电机；
“M”表示食品加工电机；
“X”表示饮水机清洗电泵；
“T”表示铁壳电机；
“G”表示滚筒电机；
“R”表示热水器电机；
“C”表示油烟机电机；
“S”表示净水设备电泵；
“W”表示洗碗机电泵；
“H”表示干衣机电机；
“Q”表示空气清新机电机、加湿器电机、除湿机电机；
“J”表示清洁设备电机；
“U”表示电动工具电机；
“D”表示吸尘器电机。

- The meaning of each character:

"F" refers to plastic packing motor or fan, cooling fan, ceiling-fan motor, refrigerator motor; "T" refers to iron shell motor; "S" refers to commercial motor;
"B" refers to impeller motor or pumps; "G" refers to the rollor motor; "W" refers to the dishwasher motor; "H" refers to the dryer motor;
"Y" refers to the ice compressor motor, and air compressor motor; "R" refers to water heater motor;
"Q" refers to air purifier motor, humidifier motor, dehumidifier motor; "M" refers to the food processing motor; "C" indicates the hood motor;
"J" refers to the cleaning machine motor; "U" refers to the motor of the electric tool; "X" refers to the motor used for water dispenser cleaning;
"S" refers to the motor used in water purification equipment; "D" refers to the vacuum cleaner motor.

1.3 由1位大写字母（A~Z）组成，B、I、O不使用，无特殊代码要求的可省略

1.3 Composed of 1 uppercase letters (A~Z); B, I, O are not used; those with no special code requirements can be omitted.



- 1 电机类型(见1.1)
Motor type (see 1.1)
- 2 使用行业和分类代号(见1.2)
Applicable industry and classification code (see 1.2)
- 3 功能代号(见1.3)
Function code (see 1.3)
- 4 标称功率（铁芯/外壳规格）（见1.4）
Nominal power (iron core / shell specifications) (see 1.4)
- 5 极数（叠厚）（见1.5）
Pole number (thickness) (see 1.5)
- 6 设计序号+绕组材质(见1.6)
Design No. + Winding Material (see 1.6)

1.4 标称功率（铁芯/外壳规格）

串激电机用定子铁芯外径的整数值表示，有刷直流电机、有刷直流泵用机壳外径的整数值表示，其他电机用额定输出功率的整数值表示，用1至5位阿拉伯数字表示（1,2,3...），对于额定输出超过10000W的电机，应将后面三个零以K表示，例：10000W，在型号中应为10K。

1.4 Nominal power (iron core / shell specifications)

The universal motor is expressed by the integer value of stator core diameter; the brushless DC motor and brush DC pump are expressed by the integer value of case diameter; other motors can be expressed by the integer value of output rating, with arabic numerals of single digit to 5 digit(1, 2, 3...). For motors whose rated output is more than 10000W, the following three zeros should be expressed by K, for example: in the model, 10000W should be 10K.

1.5 极数（叠厚）

串激电机用定子铁芯叠厚的整数值表示，有刷直流电机、有刷直流泵用转子铁芯叠厚的整数值表示，其他电机用极数表示，用1至3位阿拉伯数字表示（1,2,3...）。

1.5 Pole number (thickness)

The universal motor is expressed by the integer value of stator core thickness; the brushless DC motor and brush DC pump are expressed by the integer value of stator core thickness; other motors can be expressed by pole numbers, arabic numerals of single digit to triple digit(1, 2, 3...).

1.6 设计序号+绕组材质

用“1-999”的阿拉伯数字表示。L表示含有铝线绕组，不含铝线绕组的可省略。

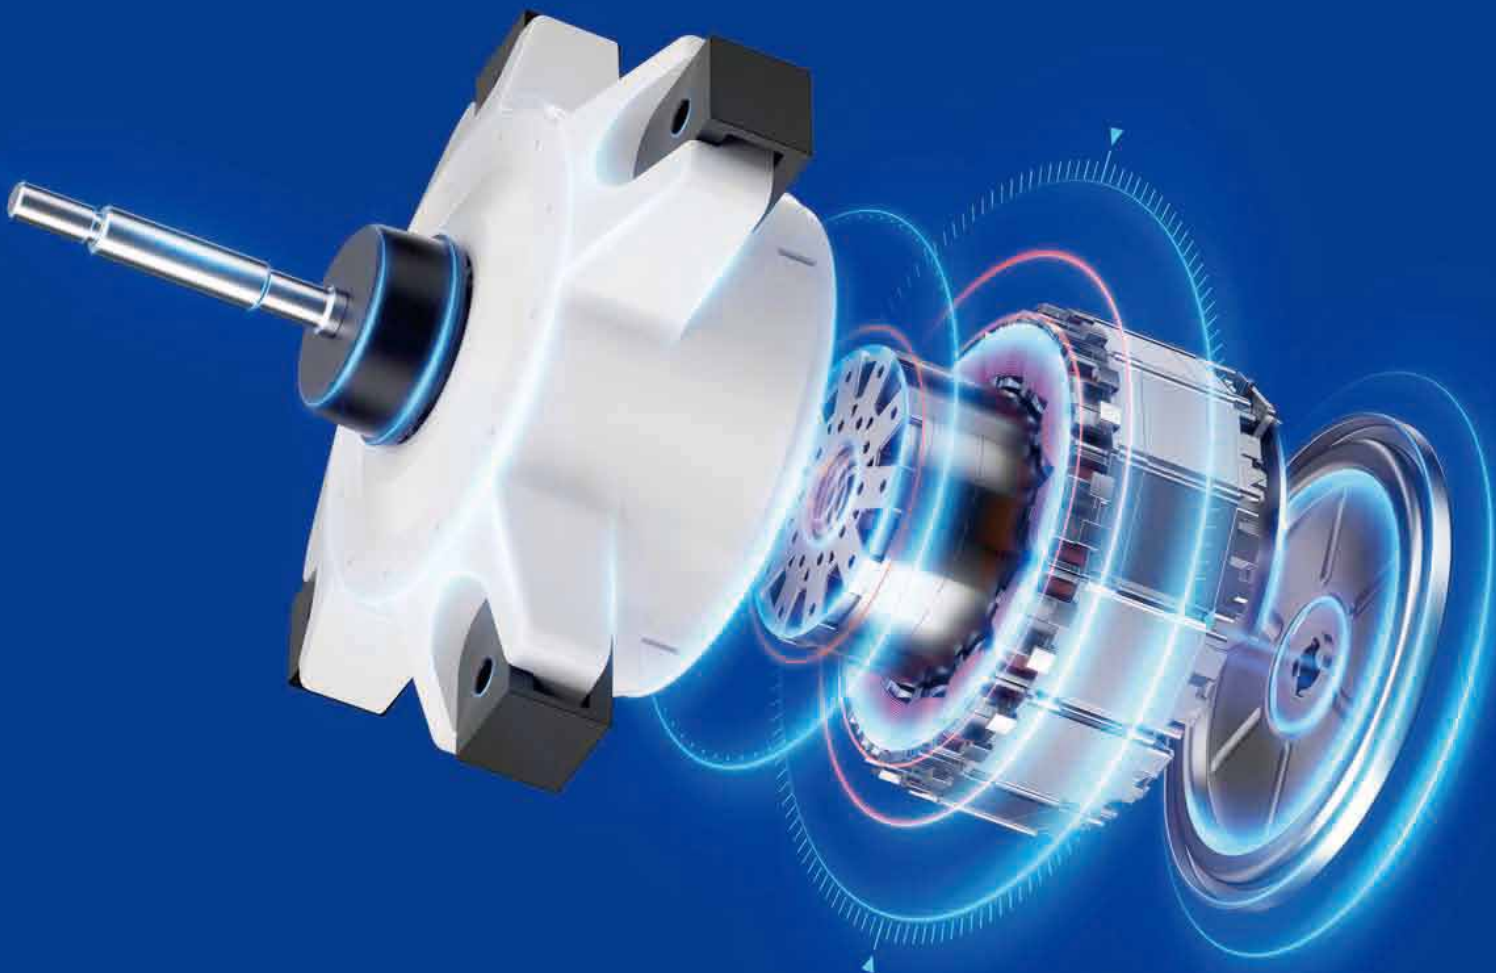
1.6 Design No. + Winding Material

Use arabic numerals "1-999" to represent it. L refers to aluminium wire winding is contained. The one without that winding can be omitted.

家用空调新能效专用BLDC电机

BLDC motor for new energy efficiency household air conditioner

- 高绕组系数，高功率密度
 - 小型化设计，体积减少30%
 - 静音化设计
 - 10P12S切向IPM拓扑结构创新应用于家用空调风机
- High winding coefficient, high power density
 - Miniaturized design, with a 30% reduction in volume
 - Quiet design
 - 10P12S tangential IPM topology, an innovation for residential air conditioner fans



DC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control	极数 Poles
	5 W	10 W	20 W	30 W	40 W	50 W	60 W	70 W	80 W					
70										5~30	140/310		方波驱动、弦波驱动、无驱动可选 Square-wave driving & sine-wave driving & no driving	8P
79										5~70	140/310		方波驱动、弦波驱动、无驱动可选 Square-wave driving & sine-wave driving & no driving	8P
79										5~70	140/310		弦波驱动、无驱动可选 Sine-wave driving & no driving	8P/10P



70系列室内机 70 series Indoor Unit

产品特点 Features
电机本体厚度39mm
Thickness of motor body 39mm

用途 Application
空调室内机
A/C indoor unit



79系列室内机 79 series Indoor Unit

产品特点 Features
树脂封装，本体厚度39/42/51mm可选，铜线
Resin packing, body thickness is optional among 39/42/51mm, copper wires

用途 Application
空调室内机，空气净化器
A/C indoor unit, air purifier



79系列室外机 79 series Outdoor Unit

产品特点 Features
树脂封装，安装方式为法兰盘式
Resin packing, flange mounting

用途 Application
空调室外机，空气能热水器
A/C outdoor unit, air energy water heater

DC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control	极数 Poles
	5 W	10 W	20 W	30 W	40 W	50 W	60 W	70 W	80 W					
87										20~80	140/310	○	方波驱动、弦波驱动、无驱动可选 Square-wave driving & sine-wave driving & no driving	8P/10P
87										25~80	140/310	⬠	方波驱动、弦波驱动、无驱动可选 Square-wave driving & sine-wave driving & no driving	8P/10P



87系列室内机 87 series Indoor Unit

产品特点 Features
树脂封装，本体厚度39/42/51mm可选，铜线及铝线可选
Resin packing, body thickness is optional among 39/42/51mm, copper & aluminum wires

用途 Application
空调室内机，空气净化器
A/C indoor unit , air purifier



87系列室外机 87 series Outdoor Unit

产品特点 Features
树脂封装，铜线及铝线可选，安装方式为法兰盘式
Resin packing, copper & aluminum wires, flange mounting

用途 Application
空调室外机，空气能热水器
A/C outdoor unit, air-heat pump water heater

DC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control	极数 Poles
	10 W	20 W	30 W	40 W	50 W	60 W	70 W	80 W	90 W					
87										20~60	140/310	○	弦波驱动、无驱动可选 Sine-wave driving & no driving	8P
D85										10~70	140/310	○	弦波贴片式芯片、无驱动 Sine wave chip-type chip & no driving	10P
D87										10~70	310	□	无驱动 no driving	10P



87系列盘管机 87 series FAN COIL

产品特点 Features
树脂封装，铜线及铝线可选，安装方式为法兰盘式
Resin packing, copper & aluminum wires, flange mounting

用途 Application
盘管风机
FCU



D85系列 D85 series

产品特点 Features
树脂封装铜线及铝线可选
扁平化拓扑、IPM分块转子
边缘磁导优化静音技术
绝缘转子防电蚀设计
Resin encapsulated copper wire and aluminum wire optional, Flat topology, IPM segmented rotor
Edge magnetic flux optimization for quiet operation, Insulated rotor design to prevent electrical corrosion

用途 Application
空调室内机，空气净化器
A/C indoor unit , air purifier



D87外转子系列 D87 External Rotor Series

产品特点 Features
相比同能力内转子电机，轴向尺寸↓40%，重量↓30%
Compared to rotor motors of the same capacity, the axial dimension is ↓ 40% and the weight is ↓ 30%

用途 Application
空调室内机
A/C indoor unit

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control
	5 W	10 W	20 W	30 W	40 W	50 W	60 W	70 W	80 W				
78										5~30	100-130/ 200-240		PG/抽头/单速可选, PG调速, 可选2/6/12极磁环 PG / tap / single speed, PG speed regulation, 2/6/12 magnet ring
79										5~30	100-130/ 200-240		PG调速 PG speed regulation
80										5~35	100-130/ 200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed



78系列 78 series

产品特点 Features

树脂封装, 本体厚度32/39/41/49可选, 铜线及铝线可选
Resin packing, body thickness is optional among 32/39/41/49mm, copper & aluminum wires

用途 Application

空调, 空气净化机
Air conditioner, air purifier



79系列 79 series

产品特点 Features

树脂封装, 本体厚度32/39/49可选, 铜线
Resin packing, body thickness is optional among 32/39/49mm, copper wire

用途 Application

空调
Air conditioner



80系列分体空调室外机 80 series (Outdoor Unit)

产品特点 Features

铁壳电机拉伸结构, 铁芯10-35mm可选, 铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 10 to 35mm, copper & aluminum wires

用途 Application

空调外机
A/C outdoor unit

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control
	5 W	10 W	20 W	30 W	40 W	50 W	60 W	70 W	80 W				
80										5~35	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
D89										5~18	220~240		/
95										25~80	100-130 /200-240		PG调速 PG speed regulation



80系列移动空调机 80 series (Portable A/C)

产品特点 Features

铁壳电机拉伸结构, 铁芯10-35mm可选, 铜线及铝线可选
Steel casing motor tensile structureiron core is optional from 10 to 35mm, copper & aluminum wires

用途 Application

移动空调和清新机等
Portable A/C, air freshener



D89系列 D89D series /RP001

产品特点 Features

分离模块化定子设计实现高度自动化生产, 齿顶采用削弧处理配合不均匀气隙消减低次谐波, 提升电机效率, 改善电机噪音、振动

The modular stator design for separation achieves highly automated production, and the tooth top is treated with arc cutting combined with uneven air gap to reduce low order harmonics, Improve motor efficiency, reduce motor noise and vibration

用途 Application

空调室内机
A/C indoor unit



95系列分体空调室内机 95 series Indoor Unit

产品特点 Features

铁壳电机拉伸结构, 铜线及铝线可选
Steel casing motor tensile structure, copper & aluminum wires

用途 Application

空调
Air conditioner

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control
	5 W	10 W	20 W	30 W	40 W	50 W	60 W	70 W	80 W				
95										15~80	100-130/ 200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
95										15~40	100-130/ 200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
95										15~80	100-130/ 200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed



95系列分体空调室外机 95 series Outdoor Unit

产品特点 Features

铁壳电机拉伸结构，铁芯15-40mm可选，铜线及铝线可选
Steel casing motor tensile structure, tensile end cap packaging, iron core is optional from 17.5 to 40mm, copper & aluminum wires

用途 Application

空调外机
A/C outdoor unit



95系列分体空调室外机 95 series Outdoor Unit

产品特点 Features

树脂封装，铁芯17.5-25mm可选，铜线
Resin packing, iron core is optional from 17.5 to 25mm, copper wire

用途 Application

空调外机
A/C outdoor unit



95系列移动空调机 95 series Portable A/C

产品特点 Features

铁壳电机拉伸结构，铁芯17.5-40mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 17.5 to 40mm, copper & aluminum wires

用途 Application

空调外机，移动空调
A/C outdoor unit, portable A/C

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control
	5 W	10 W	20 W	30 W	40 W	50 W	80 W	90 W	100 W				
95										25~80	100-130/ 200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
95										10~80	100-130/ 200-240		主抽头/副抽头可选 Main tap / assistant tap



95系列窗式空调机 95 series Window A/C

产品特点 Features

铁壳电机拉伸结构，铁芯17.5-40mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 17.5 to 40mm, copper & aluminum wires

用途 Application

窗机，移动空调
Window A/C, portable A/C



95系风盘式空调内机 95 series Indoor FCU

产品特点 Features

铁壳电机卷板结构，铜线及铝线可选
Steel casing motor plate rolling structure, copper & aluminum wires

用途 Application

空调
Air conditioner

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control
	5 W	10 W	20 W	30 W	40 W	50 W	80 W	90 W	100 W				
110										50~100	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
110										50~100	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
110										50~100	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed



110系列分体落地空调室内机 110 series Indoor Unit

产品特点 Features
铁壳电机拉伸结构，铜线及铝线可选
Steel casing motor tensile structure, copper & aluminum wires

用途 Application
空调
Air conditioner



110系列分体空调室外机 110 series Outdoor Unit

产品特点 Features
铁壳电机拉伸结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 45mm, copper and aluminum wires

用途 Application
空调外机
A/C outdoor unit



110系列移动空调机 110 series Portable A/C

产品特点 Features
铁壳电机拉伸结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 45mm, copper & aluminum wires

用途 Application
移动空调
Portable A/C

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (w)	电压 Voltage (v)	安装方式 Installation method	控制方式 Control
	5 W	10 W	20 W	30 W	40 W	50 W	80 W	90 W	100 W				
110										50~100	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
110										50~100	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
120										50~100	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed



110系列窗式空调机 110 series Window A/C

产品特点 Features
铁壳电机拉伸结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 45mm, copper & aluminum wires

用途 Application
窗机，移动空调
Window A/C, portable A/C



110系列风盘式空调内机 110 series Indoor FCU

产品特点 Features
铁壳电机卷板结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor plate rolling structure, iron core is optional from 20 to 45mm, copper & aluminum wires

用途 Application
风机盘管
FCU



120系列风盘式空调内机 120 series Indoor FCU

产品特点 Features
铁壳电机卷板结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor plate rolling structure, iron core is optional from 20 to 45mm, copper & aluminum wires

用途 Application
风机盘管
FCU

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	50 W	60 W	70 W	80 W	90 W	100 W	110 W	120 W	130 W				
120										60~130	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
120										60~130	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed



120系列分体落地空调室内机 120 series Indoor Unit

产品特点 Features

铁壳电机拉伸结构,铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure , iron core is optional from 20 to 45mm, copper & aluminum wires

用途 Application

空调
Air conditioner



120系列分体落地空调室外机 120 series Outdoor Unit

产品特点 Features

铁壳电机拉伸结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 45 mm, copper & aluminum wires

用途 Application

空调外机
A/C outdoor unit

AC-家用空调电机

Home Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	50 W	60 W	70 W	80 W	90 W	100 W	110 W	120 W	130 W				
120										60~130	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
120										60~130	100-130 /200-240		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed



120系列窗式空调机 120 series Window A/C

产品特点 Features

铁壳电机拉伸结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 45 mm, Copper & aluminum wires

用途 Application

窗机
Window A/C



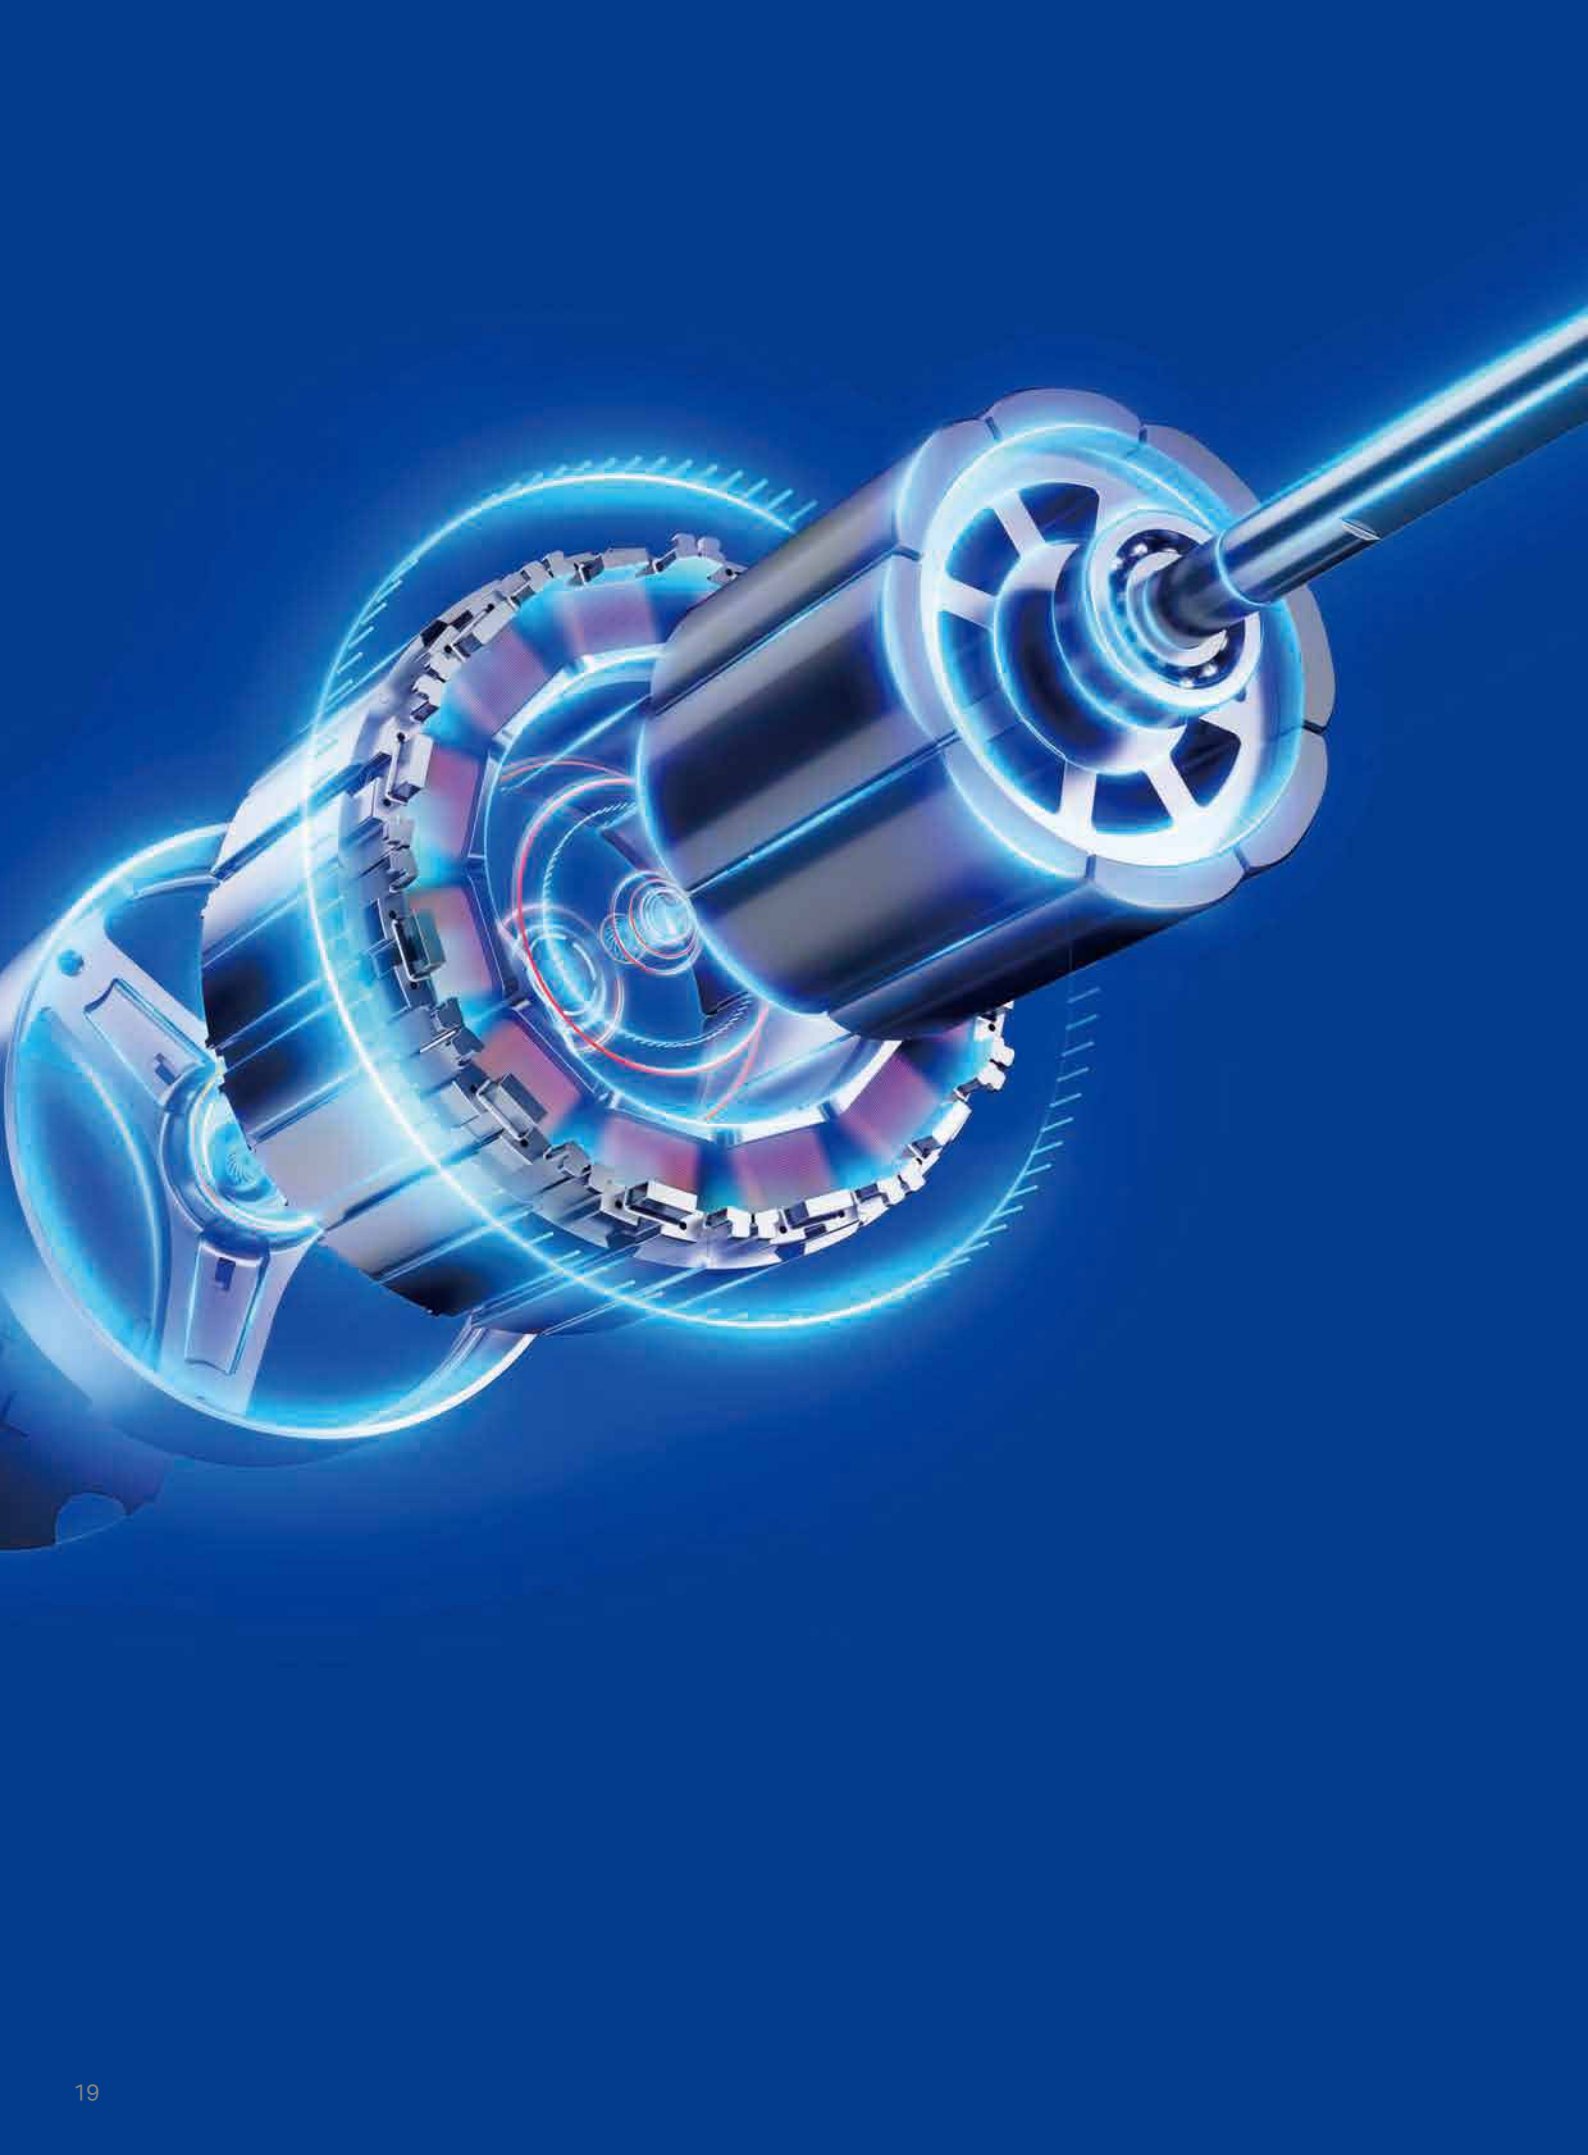
120系列移动空调机 120 series Portable A/C

产品特点 Features

铁壳电机拉伸结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 45 mm, copper & aluminum wires

用途 Application

移动空调
Portable A/C



商用风机电机

Welling motor for commercial indoor FCU

- 恒转矩变频电机技术，高效低噪控制技术
 - 智能送风，平衡空间温差，恒温舒适空间
 - 多重防护，安全可靠
-
- Constant torque inversion motor technology and high-efficiency and low-noise control technology
 - Intelligent air supply, balancing room temperature and ensuring thermostatic and comfortable space
 - Multiple protection, safe and reliable



商用空调电机

Commercial Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control	极数 Poles
	50 W	80 W	110 W	140 W	170 W	200 W	230 W	270 W	300 W					
107										80~150	310		FOC矢量控制 无驱动 FOC vector control No drive	8P
107										80~240	310		FOC矢量控制 无驱动 FOC vector control No drive	8P
105										60~300	310		FOC矢量控制 无驱动 FOC vector control No drive	10P



107系列室内机

107 series Indoor

产品特点

Features

树脂封装，铜线及铝线可选
Resin packing, copper & aluminum wires

用途

Application

柜机室内机
Packaged A/C indoor unit



107系列室外机（柜机，天花机）

107 series Outdoor Unit（Pcakaged/Ceiling）

产品特点

Features

树脂封装，铜线及铝线可选，减震胶圈及法兰盘安装可选
Resin packing, copper & aluminum wires, vibration reduction rubber gasket & flange mounting

用途

Application

柜机室外机，天花机室外机
Packaged A/C outdoor unit, ceiling A/C outdoor unit



105系列室内机

105 series Outdoor Unit

产品特点

Features

树脂封装，胶圈及法兰盘式安装可选，铜/铝可选
Resin packing, apron and flange mounting are optional, copper winding/aluminum winding is optional

用途

Application

柜机室内机
Packaged A/C outdoor unit

商用空调电机

Commercial Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control	极数 Poles
	50 W	80 W	110 W	140 W	170 W	200 W	230 W	270 W	300 W					
107										100~250	310		FOC矢量控制 无驱动 FOC vector control No drive	8P
107										100~250	310		FOC矢量控制 无驱动 FOC vector control No drive	8P
105										60~300	310/650		FOC矢量控制 无驱动 FOC vector control No drive	10P



107系列室外机（柜机，天花机）

107 series Outdoor Unit（Pcakaged/Ceiling）

产品特点

Features

树脂封装，胶圈及法兰盘式安装可选，铜线及铝线可选
Resin packing, rubber gasket & flange mounting, copper and aluminum wires

用途

Application

柜机室外机，天花机室外机
Packaged A/C outdoor unit, ceiling A/C outdoor unit



107系列室内机（盘管机）

107 series Indoor Unit（Coil Unit）

产品特点

Features

树脂封装，胶圈安装，铜线及铝线可选
Resin packing, rubber gasket mounting, copper & aluminum wires

用途

Application

盘管风机
FCU



105系列室外机（柜机，天花机）

105 series Outdoor Unit（Pcakaged/Ceiling）

产品特点

Features

树脂封装，胶圈及法兰盘式安装可选，铜线及铝线可选
Resin packing, apron and flange mounting are optional, copper winding/aluminum winding is optional

用途

Application

柜机室外机，天花机室外机
Packaged A/C outdoor unit, ceiling A/C outdoor unit

商用空调电机

Commercial Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control	极数 Poles
	100 W	200 W	300 W	400 W	500 W	600 W	800 W	1000 W	1200 W					
138										250~750	230/115		FOC矢量控制，恒转矩/恒转速/ 恒风量/Sensorless FOC vector control, constant torque / constant speed / constant cfm / sensorless	8P
140										200~900	310		Sensorless	10P
173										350~1200	310/650		Sensor/Sensorless	8P/10P



138系列室内机 138 series Indoor Unit

产品特点 Features

树脂封装，铁芯22-64mm可选，铜线及铝线可选
Resin packing, iron core is optionalfrom 20 to 64mm, copper & aluminum wires

用途 Application

商用空调
Commercial A/C



140系列室内机 (BLDC) 140 series BLDC Indoor Unit

产品特点 Features

铁壳电机卷板结构，铁芯22-64mm可选，铜线及铝线可选
Steel casing motor plate rolling structure, iron core is optional from 20 to 64mm, copper & aluminum wires

用途 Application

商用室内机
Commercial indoor unit



173系列室外机 173 series Outdoor Unit

产品特点 Features

树脂封装，铁芯20-65mm可选，铜线及铝线可选
Resin packing, iron core is optional from 20 to 65mm, copper & aluminum wires

用途 Application

商用空调
Commercial A/C

商用空调电机

Commercial Air Conditioner Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	80 W	100 W	200 W	300 W	500 W	600 W	800 W	1500 W	2100 W				
140										80~300	230/460		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
160										350~2100	460		三相 Triphase



140系列空调室内机（感应电机） 140 series Indoor FCU

产品特点 Features

铁壳电机卷板结构，铁芯20-70mm可选，铜线及铝线可选
Steel casing motor plate rolling structure, iron core is optional from 20 to 70 mm, copper & aluminum wires

用途 Application

商用空调
Commercial A/C



160系列室内机 160 series Indoor Unit

产品特点 Features

铁壳电机卷板结构，铁芯30-130mm可选，铜线
Steel casing motor plate rolling structure, iron core is optional from 30 to 130 mm, copper wire

用途 Application

商用空调
Commercial A/C



滚筒洗衣机电机

Welling motor for drum washing machine

- 无位置传感器快速起动技术，可提高洗净比，有效减少洗涤时间
- 正弦波矢量控制驱动，有效降低噪音和振动
- 智能不平衡感知技术，实现快速脱水和超低噪音
- Quick start technology of position-less sensors, effectively reducing washing time
- Sine wave vector control drive, effectively reducing noise and vibration
- Intelligent imbalance sensing technology, implementing quick dehydration and minimizing noise



滚筒洗衣机电机

Drum Washing Machine Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	30 W	50 W	200 W	300 W	350 W	400 W	450 W	500 W	550 W				
UM-F										200~550	220-240		/
UM-A										30~450	220-240		/
UM-C										30~450	220-240		/



UM-F系列 UM-F series

产品特点 Features

带速度反馈，能实现500rpm-17000rpm间的无级变速，结构合理，调速方便，启动转矩大，过载能力强，绝缘性能好，可靠性高
Stepless speed regulation of 500 rpm~17000 rpm, with speed feedback. with the advantages of reasonable structure, convenient operation, high starting torque, strong overload capacity, good insulation performance and high reliability, etc.

用途 Application

滚筒洗衣机，适用于皮带传动结构
Drum washing machine (belt driven mechanical)



UM-A系列 UM-A series

产品特点 Features

带速度反馈，能实现500rpm-17000rpm间的无级变速，结构合理，调速方便，启动转矩大，过载能力强，绝缘性能好，可靠性高
Stepless speed regulation of 500 rpm~17000 rpm, with speed feedback. with the advantages of reasonable structure, convenient operation, high starting torque, strong overload capacity, good insulation performance and high reliability, etc.

用途 Application

滚筒洗衣机，适用于皮带传动结构
Drum washing machine (belt driven mechanical)



UM-C系列 UM-C series

产品特点 Features

带速度反馈，能实现500rpm-17000rpm间的无级变速，结构合理，调速方便，启动转矩大，过载能力强，绝缘性能好，可靠性高
Stepless speed regulation of 500 rpm~17000 rpm, with speed feedback. with the advantages of reasonable structure, convenient operation, high starting torque, strong overload capacity, good insulation performance and high reliability, etc.

用途 Application

滚筒洗衣机，适用于皮带传动结构
Drum washing machine (belt driven mechanical)

滚筒洗衣机电机

Drum Washing Machine Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	30 W	50 W	100 W	150 W	250 W	300 W	500 W	700 W	1000 W				
BLDC112										30~1000	洗涤40/ 脱水178 Washing 40 / Dehydration 178		正弦波驱动，高速时弱磁控制，Sensor/Sensorless可选 Sine-wave driving, field weakening control at high speed, sensor / sensorless
BLDC95										30~550	洗涤40/ 脱水178 Washing 40 / Dehydration 178		正弦波驱动，高速弱磁控制 Sine-wave driving, field weakening control at high speed
BLDC φ113										30~700	洗涤40/ 脱水178 Washing 40 / Dehydration 178		正弦波驱动，高速时弱磁控制 Sine-wave driving, field weakening control at high speed



BLDC112系列 BLDC112 series

产品特点 Features

铜/铝线可选
Copper / aluminum wire

用途 Application

滚筒洗衣机，适用于皮带结构
Drum washing machine (belt driven mechanical)



BLDC-95系列 BLDC-95 series

产品特点 Features

铝线，电控分体及一体机可选，可替代串激
Aluminum wire, electric control split body and integrated machine optional, can replace series excitation

用途 Application

5~10kg容量滚筒洗衣机，皮带传动结构
5~10kg capacity drum washing machine with belt transmission structure



BLDC-φ113系列 φ113 series

产品特点 Features

高效、低噪音、高性价比铝线电机，模块化塑封结构，可适配不同客户安装尺寸，电控分体及一体机可选
Efficient, low noise, and cost-effective aluminum wire motor with modular plastic sealing structure, suitable for different customer installation sizes. Electronic control split and integrated machines are optional.

用途 Application

7kg及以上容量滚筒洗衣机，皮带传动结构
7kg and above capacity drum washing machine with belt drive structure

波轮洗衣机电机

Pulsator Washing Machine Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	30 W	50 W	100 W	150 W	250 W	300 W	325 W	450 W	550 W				
107										30~325	280-310	1	DC输入 DC input
110										80~150	220-240	水滴	/
102										80~150	220-240	水滴	/

波轮洗衣机电机

Pulsator Washing Machine Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	80 W	100 W	120 W	140 W	150 W	170 W	180 W	190 W	300 W				
115										140~200	220-240	水滴	/
120										180~300	220-240	水滴	/



107-BLDC系列 DC107-BLDC series

产品特点 Features

驱动内置，驱动器与电机本体一体塑封，结构简单，成本低，可靠性高，铝线
Driver internally installed. AIO plastic packing of the driver and motor body with the advantages of simple structure and high reliability. aluminium wire

用途 Application

波轮洗衣机，适用于皮带传动结构
Pulsator washing machine (belt driven mechanical)



115系列 115 series

产品特点 Features

拉伸/铸铝端盖电机，铜线及铝线可选，铁芯平台110/115/120，长度16-60mm可选
Tensile / cast aluminum end cap, copper & aluminum wires, 110/115/120 length: 16-60mm

用途 Application

全自动洗衣机，双筒洗涤/脱水电机
Automatic washing machine, double barrel washing / spin-dry motor



110系列 110 series

产品特点 Features

拉伸/铸铝端盖电机，铜线及铝线可选，铁芯平台110/115/120，长度16-60mm可选
Tensile / cast aluminum end cap, copper & aluminum wires, 110/115/120 length: 16-60mm

用途 Application

全自动洗衣机，双筒洗涤/脱水电机
Automatic washing machine, double barrel washing / spin-dry motor



120系列 120 series

产品特点 Features

拉伸/铸铝端盖电机，铜线及铝线可选，铁芯平台110/115/120，长度16-60mm可选
Tensile / cast aluminum end cap, copper & aluminum wires, 110/115/120 length: 16-60mm

用途 Application

全自动洗衣机，双筒洗涤/脱水电机
Automatic washing machine, double barrel washing / spin-dry motor



102系列 102 series

产品特点 Features

拉伸端盖电机，铝线，铁芯平台102/115/120 16~60mm可选
Tensile aluminum end cap, aluminum winding, optional for iron core platform 102/110/120 , 16 to 60mm

用途 Application

全自动洗衣机，双桶洗涤/脱水电机
Automatic washing machine, double barrel washing / spin-dry motor

干衣机电机

Dryer Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	50 W	70 W	80 W	90 W	100 W	150 W	200 W	250 W	300 W				
105										90~250	220-240	⤴	正反转控制 Positive and negative turn control
120										180~300	120/230	⤴	/



105系列 105 series AC

产品特点 Features

拉伸/铸铝端盖电机，复合铁芯结构，铜线及铝线可选，长度120-400mm可选
Tensile / cast aluminum end cap, Composite core structure, optional for copper & aluminum winding, 120-400mm

用途 Application

直排式，冷凝式，热泵式干衣机
Air-vented, condensing / heat pump dryers



120系列 120 series AC

产品特点 Features

拉伸/铸铝端盖电机，铜线及铝线可选，长度120-400mm可选
Tensile / cast aluminum end cap, copper & aluminum wires, 120-400mm

用途 Application

直排式，冷凝式，热泵式干衣机
Air-vented, condensing / heat pump dryers

干衣机电机

Dryer Motor

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	50 W	70 W	80 W	90 W	100 W	150 W	200 W	250 W	300 W				
112										90~250	220-240	⤴	正弦波驱动， 无霍尔控制方式 Sine-wave driving, sensorless control
D95										90~300	220-240	⤴	正弦波驱动， 无霍尔控制方式 Sine-wave driving, sensorless control




112系列 112 series DC

产品特点 Features

效率高，调速范围广，噪音低振动小，电磁方案采用8极12槽结构，转子采用包塑结构
High efficiency, wide range of speed regulation, low noise and vibration. an 8-pole 12-slot structure is adopted in the electromagnetic solutions. plastic-clad structure is adopted in the rotors

用途 Application

干衣机 Dryer motor



D95系列 D95 series

产品特点 Features

铜铝线，电控一体机分体机可选，小型化干衣机平台静音低振动
Aluminum wire, electric control split body and integrated machine optional, Compact dryer platform with low noise and vibration

用途 Application

冷凝式，热泵式干衣机
Condensing / heat pump dryers

洗碗机电泵

Dishwasher Pump

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	20 W	30 W	40 W	45 W	50 W	55 W	60 W	65 W	70 W				
φ73										40~65	230		DC输入, 180度正弦波控制 DC input, 180° sine-wave control
同步泵 TP35										35~65	220-240/50Hz		/



φ73系列（可集成加热） φ73 series（Intergrated Heat Pump）DC

产品特点 Features

Halbach铁氧体磁环技术，免生锈，体积小，重量轻，结构简单，可靠性高；可集成水浸式加热管技术，水温加热保护+干烧断电保护；BMC塑封技术，防潮湿；铜线/铝线
Halbach ferrite magnetic ring technology, and rust-free, small size, light weight, simple structure, and high reliability. Can integrate water immersion heating tube technology, water temperature overheat protection + dry-burning power-off protection. BMC plastic sealing technology, moisture-proof. Copper wires / aluminum wires

用途 Application

洗碗机
Dishwasher



φ73系列（集成加热泵） φ73 series（Intergrated Heat Pump）DC

产品特点 Features

Halbach铁氧体磁环技术，免生锈，体积小，重量轻，结构简单，可靠性高；集成水浸式加热技术，具备水温加热保护+干烧断电保护；BMC塑封技术，防潮湿；铜线/铝线
technology, rust free, small size, light weight, simple structure, high reliability, Integrate water immersion heating tube technology, water temperature over heat protection+dry-burning power-off protection. BMC plastic packing technology, moisture-proof. Copper wires/ALuminum wires

用途 Application

洗碗机
Dishwasher



同步泵TP35 Synchronous Pump

产品特点 Features

铝线，BMC塑封技术，低成本，具备过温保护+堵转保护，可替换AC电机泵
Aluminum wire, BMC plastic sealing technology, low cost, with over temperature protection and locked rotor protection, can replace AC motor pumps

用途 Application

洗碗机
Dishwasher

洗碗机电泵

Dishwasher Pump

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	30 W	40 W	50 W	60 W	70 W	80 W	90 W	100 W	110 W				
φ90										30~70	220-240/ 50Hz, 115-127/ 60Hz		/
□101										60~110	220-240/ 50Hz, 115-127/ 60Hz		/



φ90系列 φ90 series AC

产品特点 Features

电容运转感应水泵，铜线/铝线
Capacitance running induction pump, copper wires / aluminum wires

用途 Application

洗碗机
Dishwasher



φ90系列（集成加热泵） φ90 series（Intergrated Heat Pump）AC

产品特点 Features

电容运转感应水泵，铜线/铝线，集成水浸式加热技术，具备水温加热保护+干烧断电保护
Capacitance running induction pump, copper wires/aluminum wires, Integrate water immersion heating tube technology, water temperature over heat protection+dry-burning power-off protection

用途 Application

洗碗机
Dishwasher



□101系列 □101series AC

产品特点 Features

电容运转感应水泵，铜线/铝线
Capacitance running induction pump, copper wires/aluminum wires

用途 Application

洗碗机
Dishwasher

热泵热水器风机

HP Water Heater Fan

产品系列 Series	能力范围 Capacity range (m³/h)									输入功率 Input power (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	1	100	200	400	600	800	1000	2000	5000				
φ 149前倾离心风机	(0-270)									13	220-240V 50Hz	/	PWM, VSP
φ 190后倾离心风机	(0-650)									50	220-240V 50Hz	/	PWM, VSP
φ 200轴流风机	(0-570)									12	220-240V 50Hz	/	PWM, VSP
φ 225后倾离心风机	(0-840)									87	220-240V 50Hz	/	PWM, VSP



φ 149前倾离心风机 φ 149 Forward-centrifugal Fan

产品特点 Features

低噪音，低振动，大风量
Quiet and steady, high Air flow volume

用途 Application

热泵热水器换热用风机
Heat exchange fan HP water heater



φ 190后倾离心风机 φ 190Backward-centrifugal Fan

产品特点 Features

高静压，低噪音
High static pressure, low noise

用途 Application

热泵热水器换热用风机
Heat exchange fan HP water heater



φ 200轴流风机 φ 200 Axial Fan

产品特点 Features

大风量，低噪音，抗静压
Large air volume, low noise, resistance to static pressure

用途 Application

热泵热水器换热用风机
Heat exchange fan HP water heater



φ 225后倾离心风机 φ 225 Backward-centrifugal Fan

产品特点 Features

高静压，低噪音
High static pressure, low noise


用途 Application

热泵热水器换热用风机
Heat exchange fan HP water heater

热泵采暖风机、循环泵

HP Heating Fan & Circulating Water Pump

产品系列 Series	能力范围 Capacity range (m³/h)									输入功率 Input power (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	1000	1500	2000	2500	3000	3500	4000	4500	5000				
φ 500轴流风机	(0-4900)									170	220-240V 50Hz	/	PWM, VSP
φ 560轴流风机	(0-4900)									200	220-240V 50Hz	/	PWM, VSP

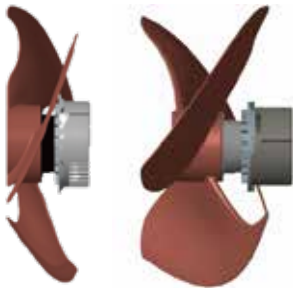

φ 500 / 560轴流风机 φ 500 / 560Axial Fan

产品特点 Features

智能EC控制技术，超静音设计，大扭矩、高效能，结构紧凑且安装维修方便
Intelligent EC control tech, intelligent EC control tech, intelligent EC control tech, compact structure and convenient installation and repair

用途 Application

热泵采暖换热用风机
Heat exchange fan for HP heating

产品系列 Series	能力范围 Capacity range									功率 Output	电压 Voltage	安装方式 Installation method	控制方式 Control
	1 W	2 W	3 W	4 W	5 W	10 W	50 W	100 W	200 W				
热泵循环泵										4~95	AC 230V		无霍尔感应，正弦波驱动 No Hall induction, sine wave drive



热泵循环泵φ73系列 HP circulating water pump φ73 series

产品特点 Features

BMC定子塑封高防护，电控总成小型化，最优电磁电控优化低噪音，高控制精度恒流量
BMC stator plastic packaging achieves high protection, electrical control assembly structure optimization achieves miniaturization, electromagnetic electrical control optimization achieves low noise, and high control accuracy achieves constant flow

用途 Application

热泵采暖系统
HP heating system

商用空调排水泵

Commercial Air Conditioner Drainage Pump

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	1 W	2 W	3 W	4 W	5 W	10 W	60 W	90 W	100 W				
空调排水泵										1~3	12V		无霍尔感应，正弦波驱动 No Hall induction, sine wave drive



空调排水泵50系列 Drainage pump 50 series

产品特点 Features
低噪音振动、低成本、轻量化
Low noise and vibration, low cost, lightweight

用途 Application
家用/商用空调
Home / commercial air conditioner

其他

Others

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	50 W	60 W	70 W	80 W	100 W	110 W	120 W	150 W	400 W				
107										80~150	310		FOC矢量控制、恒风量控制可选 FOC vector control / constant cfm control
120										50~150	220/230		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
D117										120~400	310V		无驱动 no driving



107系列烟机 DC 107 series Kitchen Hood

产品特点 Features
树脂封装，法兰盘式安装, 铜线及铝线可选
Resin packing, flange mounting, copper & aluminum wires

用途 Application
抽油烟机
Kitchen hood



120系列抽油烟机 120 series Kitchen Hood

产品特点 Features
铁壳电机拉伸结构，铁芯20-45mm可选，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 45 mm, copper & aluminum wires

用途 Application
抽油烟机
Kitchen hood



D117系列 D117系列

产品特点 Features
18槽20极配转子IPM设计，超薄静音高效烟机
18 slot 20 pole rotor IPM design, ultra-thin, silent and efficient range hood

用途 Application
抽油烟机
Kitchen hood

其他
Others

产品系列 Series	能力范围 Capacity range									功率 Output (W)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	30 W	50 W	70 W	80 W	100 W	110 W	120 W	130 W	150 W				
80										30~100	220/230		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed
95										50~100	220/230		主抽头/副抽头/单速可选 Main tap / assistant tap / single speed



80系列 80 series

产品特点 Features

铁壳电机拉伸结构，铁芯20-40mm，铜线
Steel casing motor tensile structure, iron core is optional from 20 to 40mm, copper wire

用途 Application

抽油烟机
Kitchen hood



95系列 95 series

产品特点 Features

铁壳电机拉伸结构，铁芯20-40mm，铜线及铝线可选
Steel casing motor tensile structure, iron core is optional from 20 to 40mm, copper & aluminum wires

用途 Application

抽油烟机
Kitchen hood

其他
Others

产品系列 Series	能力范围 Capacity range									电感 Reted Output (mH)	电压 Voltage (V)	安装方式 Installation method	控制方式 Control
	1.5 mH	5 mH	8 mH	10 mH	15 mH	20 mH	25 mH	30 mH	35 mH				
空调电抗										1.5~25	串联系统, 无电压要求 Series system, no voltage requirement		/
洗衣机电抗										1.5~25	串联系统, 无电压要求 Series system, no voltage requirement		/
破壁机电抗										1.5~25	串联系统, 无电压要求 Series system, no voltage requirement		/



空调用电抗器系列 Electric Reactor for A/C

产品特点 Features

采用优质绝缘材料及先进生产工艺，产品一致性好，可靠性高，铜线/铝线可选
Using high quality insulation materials and advanced production technology, good product consistency and high reliability, copper & aluminum wires

用途 Application

家用/商用变频空调
Home / commercial inverter air conditioner



洗衣机用电抗器系列 Electric Reactor for Washing Machine

产品特点 Features

树脂灌封，塑料外壳，铜线及铝线可选，安装方式为塑封壳体装配
Resin packaging, plastic casing, copper & aluminum wires, plastic packing shell assembly

用途 Application

变频洗衣机
DC washing machine



破壁机电抗器系列 Electric Reactor for The Wall Machine

产品特点 Features

采用优质绝缘材料及先进生产工艺，产品一致性好，可靠性高，铜线/铝线可选
Using high quality insulation materials and advanced production technology, good product consistency and high reliability, copper & aluminum wires

用途 Application

变频破壁机
DC inverter wall machine

安装方式

Installation Method

01		橡胶圈	Rubber gasket
02		法兰盘/带胶圈	Flange type with rubber gasket
03		树脂封装，胶圈安装	Resin packing, rubber gasket
04		水平	Horizontally
05		减震胶圈/法兰盘	Damping rubber gasket / Flange type
06		法兰盘式	Flange type
07		端盖支架	Cap support
08		抱箍安装	Hoop Mounting
09		水平线垂直	Horizontal line vertical
10		橡胶圈、支架	Rubber gasket, support
11		轴伸端朝下	The axle stretch end downward
12		垂直	Vertically
13		具有安装脚结构	Foot Mounting Structure
14		减震圈/支架	Damping ring / support
15		螺钉固定	Screw fixing
16		钣金限位后螺钉固定	Screw fixing after sheet metal limit

联系我们

CONTACT US

广东威灵电机制造有限公司

地址：广东省佛山市顺德区北滘（窖）镇工业园兴业路27号
邮编：528333
电话：+86-757-22809161
网址：www.wellingmotor.com

GUANGDONG WELLING MOTOR MANUFACTURING CO., LTD.

Address: No. 27 Xingye Road, Beijiao Industrial Park,
Shunde, Foshan, Guangdong, P.R. China
Postcode:528333
Tel: +86-757-22809161
www.wellingmotor.com