


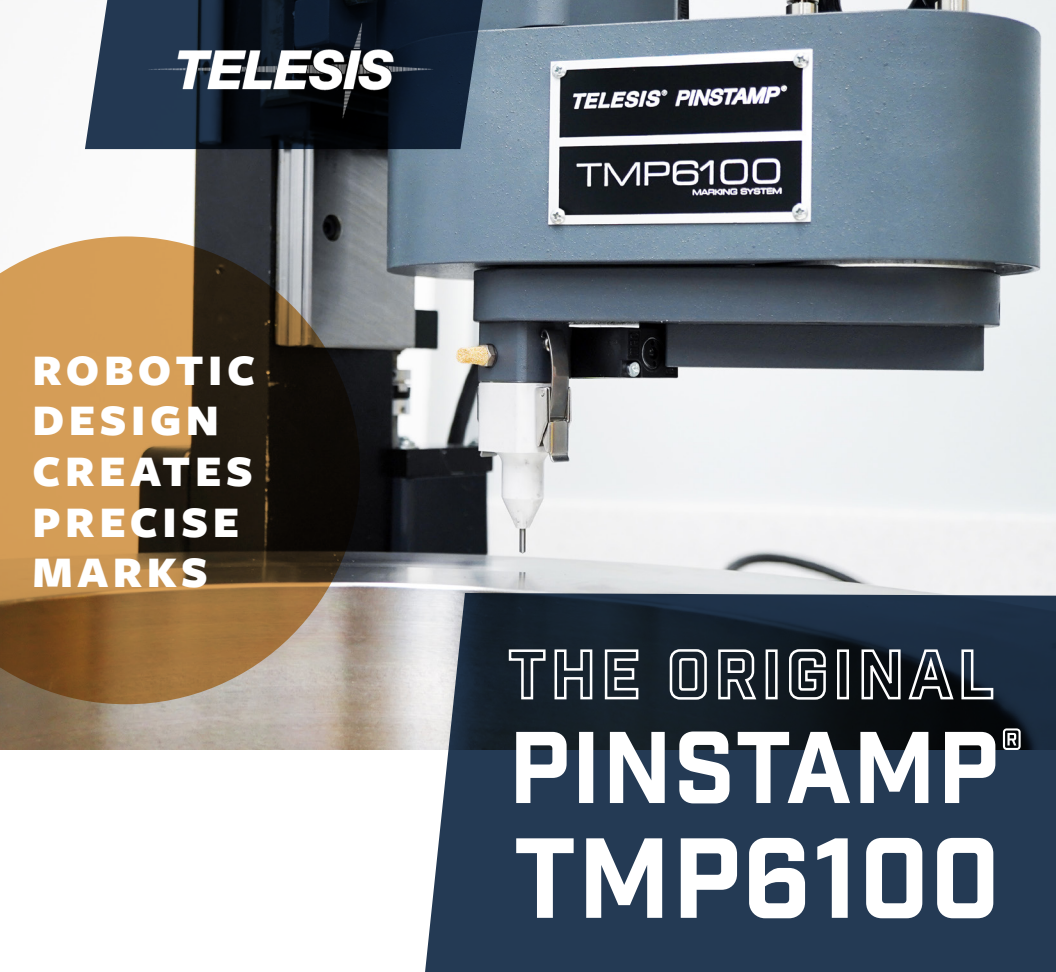

TELESIS

TELESIS® PINSTAMP®

TMP6100
MARKING SYSTEM

ROBOTIC
DESIGN
CREATES
PRECISE
MARKS

THE ORIGINAL PINSTAMP® TMP6100

THE DOT PEEN MARKER WITH A **GIANT MARKING WINDOW**

Great for cylindrical marking where a rotary device can add efficiency and practicality

Durable components **withstand tough manufacturing environments**

Satisfies a wide range of marking applications while **integrating into factory automation networks**

A unique dot peen marker **perfectly suited to satisfy highly regulated markets**, like aerospace, automotive, and medical

Marking Window



12.0 in
30 mm

6.0 in
152 mm

Marking Specifications

Max Character Depth	.012 in .3 mm
Max Character Height	6 in 152.4 mm
Characters per Second	6
Resolution	200 dpi



"The 6100 is top quality. Our markers run all day long and they are bulletproof."

- Bud Nelson, Acutec Precision

Additional Features

TMP6100EAS: Available as electric model

Choice of interchangeable marking pins: .001 in - .018 in (0.03 mm - 0.34 mm)

Marking speeds up to six characters per second

Automatically generates serial numbers, time, date, and shift codes

Easily interfaced to PLCs and host computers

Options and Accessories

Rotary fixtures for marking cylindrical parts

Marking head mounting post, including programmable Z-axis

Panel-mount and IP/NEMA-rated controllers

Easy and free software upgrades

Controllers

Fixed Button (TMC470)

Touchscreen (TMC520)

Software

Proprietary **Merlin® III** (optional)




AutoSense motorized Z-Axis mounting post ensures **consistent pin stroke and critical standoff distance is repeated**


WORKS WITH THE TMC520 TOUCHSCREEN CONTROLLER




PINCH ZOOM

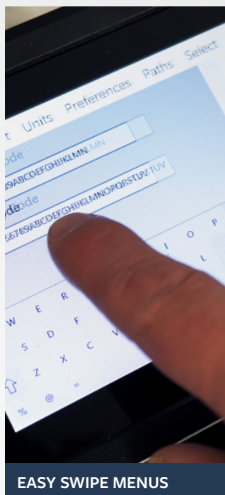

EASY SWIPE MENUS

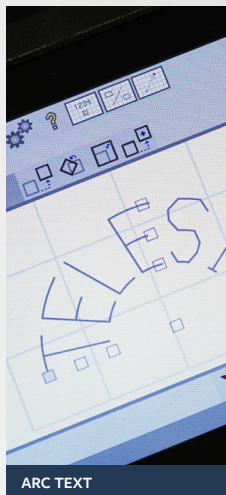

ARC TEXT

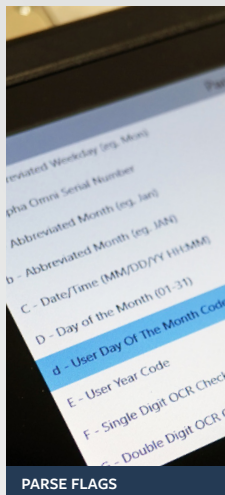

PARSE FLAGS