

Precision Pressure Transmitter



Zenith Pressure eXperts

ZT Series



New Standard in Industrial Pressure Environments
High-Accuracy Pressure Solutions, Reliable Results Always
Enhanced Accuracy with Temperature Correction Technology
Real-Time Data, Superior Accuracy

Applications

- Measurement & Test benches
- Laboratories
- Machine building
- Compressor Control
- Calibration technology
- Plant construction
- Hydraulics & Pneumatic

Features

- CE Certified
- Vdc, mA Analog output
- RS-232, RS-485 Digital output
- Gauge, Compound Gauge, Absolute measurement
- Piezoresistive silicon cell
- Stainless steel media-wetted materials


Specifications

Range	(Gauge) 0 ~ 100, 200, 350, 700 kPa / 2, 3.5, 7, 10, 20, 35, 70 MPa (Compound/Absolute) 0 ~ 100, 200, 350, 700 kPa / 2, 3.5 MPa	
Perfomance	Accuracy	± 0.1% FS, ± 0.075% FS, ± 0.05% FS
	Thermal Effect on Zero	± 0.05% FS/°C
	Thermal Effect on Span	± 0.05% FS/°C
	Compensated Temperature Range	-10 ~ 50°C
	Operating Temperature Range	-20 ~ 80°C
Electrical	Excitation	12~28 Vdc
	Output ----- 2 wire	4 ~ 20 mA
	----- 3, 4 wire	1 ~ 5 Vdc, 0 ~ 5 Vdc, 0 ~ 10 Vdc
	----- Digital	RS232(9600, 8, n, 1) / RS485(9600, 8, n, 1)
	Electrical Connection	M12, DIN43650-A
Physical	Proof Pressure	150% FS
	Burst Pressure	200% FS
	Pressure Port	PT 3/8", PT 1/4", PF 1/4", NPT 1/4", PT 1/8"
	Media-Wetted Materials	(< 7 MPa) Stainless Steel 316L, Viton (≥ 7 MPa) Stainless Steel 313, Titanium 87% Alloy

■ Electrical Connection

DIN 43650-A Connector				
Output Type	Pin No.	3-wire	2-wire	
Connection Method				
	1	Input+	Input+	
	2	Common	Output+	
	3	Output+	-	
	4	Shield	Shield	


■ Dimension & Electrical Connection

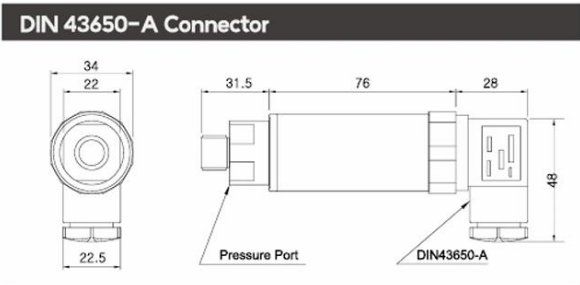

■ Electrical Connection

M12 Connector Type					
Output Type	Pin No.	4-wire	3-wire	2-wire	COMM. Only
Connection Method					
	1	Input+	Input+	Input+	Input+
	2	Output+	Output+	-	TXD
	3	Input-	Common	Output+	Common
	4	Output-	-	-	RXD
	5	Shield	Shield	Shield	Shield

■ Dimension & Electrical Connection

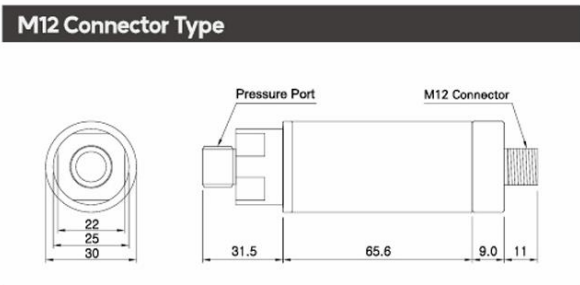

※ M12 : ●1 - White / ●2 - Brown / ●3 - Gray / ●4 - Black / ●5 - Blue

■ Ordering Information

ZT-1H

G0100RAI

Accuracy & Output

1: 0.1%
H: 4-20mA (2-wire)
Y: Comm (RS232)
Z: Comm (RS485)

2: 0.075%
B: 0-5 VDC (4-wire)
C: 0-5 VDC (3-wire)
D: 1-5 VDC (4-wire)
E: 1-5 VDC (3-wire)
K: 0-10 VDC (4-wire)
J: 0-10 VDC (3-wire)

3: 0.05%
B: 0-5 VDC (4-wire)
C: 0-5 VDC (3-wire)
D: 1-5 VDC (4-wire)
E: 1-5 VDC (3-wire)
K: 0-10 VDC (4-wire)
J: 0-10 VDC (3-wire)
Y: Comm (RS232)
Z: Comm (RS485)

Pressure Type & Range

G : Gauge
C : Compound gauge
A : Absolute

0100: 100 kPa
0200: 200 kPa
0350: 350 kPa
0700: 700 kPa
0002: 2 MPa
03.5 : 3.5 MPa
0007: 7 MPa
0010: 10 MPa
0020: 20 MPa
0035: 35 MPa
0070: 70 MPa

0100: 100 kPa
0200: 200 kPa
0350: 350 kPa
0700: 700 kPa
0002: 2 MPa
03.5 : 3.5 MPa

Unit

R: kPa
M: MPa
B: bar
K: kgf/cm²
P: psi
C: cmH₂O

Port

A: PT 3/8"
C: PT 1/4"
D: PF 1/4"
N: NPT 1/4"
G: PT 1/8"

Connector

I : DIN 43650-A Connector
M : M12 Connector

ex) ZT-1HG0100RAI : 0.1%, 4-20mA(2-wire), Gauge, 100 kPa, PT 3/8", DIN 43650-A Connector