

Encoding 1: RLE with Repeat Marker

Byte Layout:

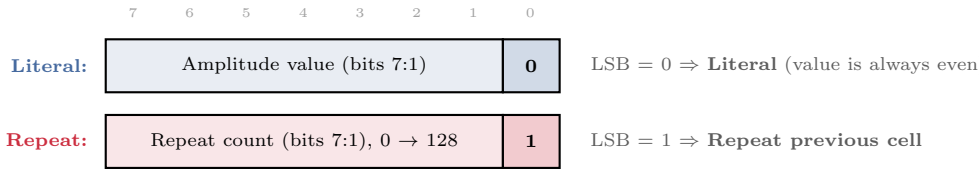

Worked Example

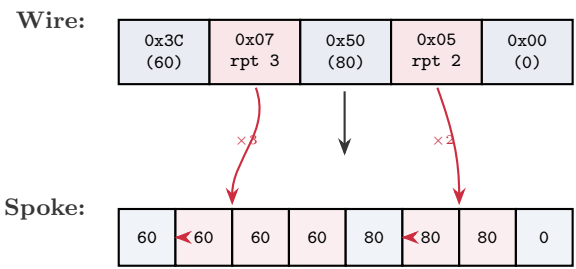

Key properties: Literal values always have LSB=0, so amplitudes are always even (0, 2, 4, . . . , 252). The repeat marker references the most recently decoded amplitude ("previous cell"), not a specific bin index. A repeat count of 0 in the wire byte means 128 repeats.