Plastic Components

Ford Ecat Electronic Parts Catalog

Exterior Plastic Components — Painted

NOTE: *The following illustration(s) are not all-inclusive of trim levels available. The actual trim level of the vehicle will determine the viability of carrying out a plastic repair.*

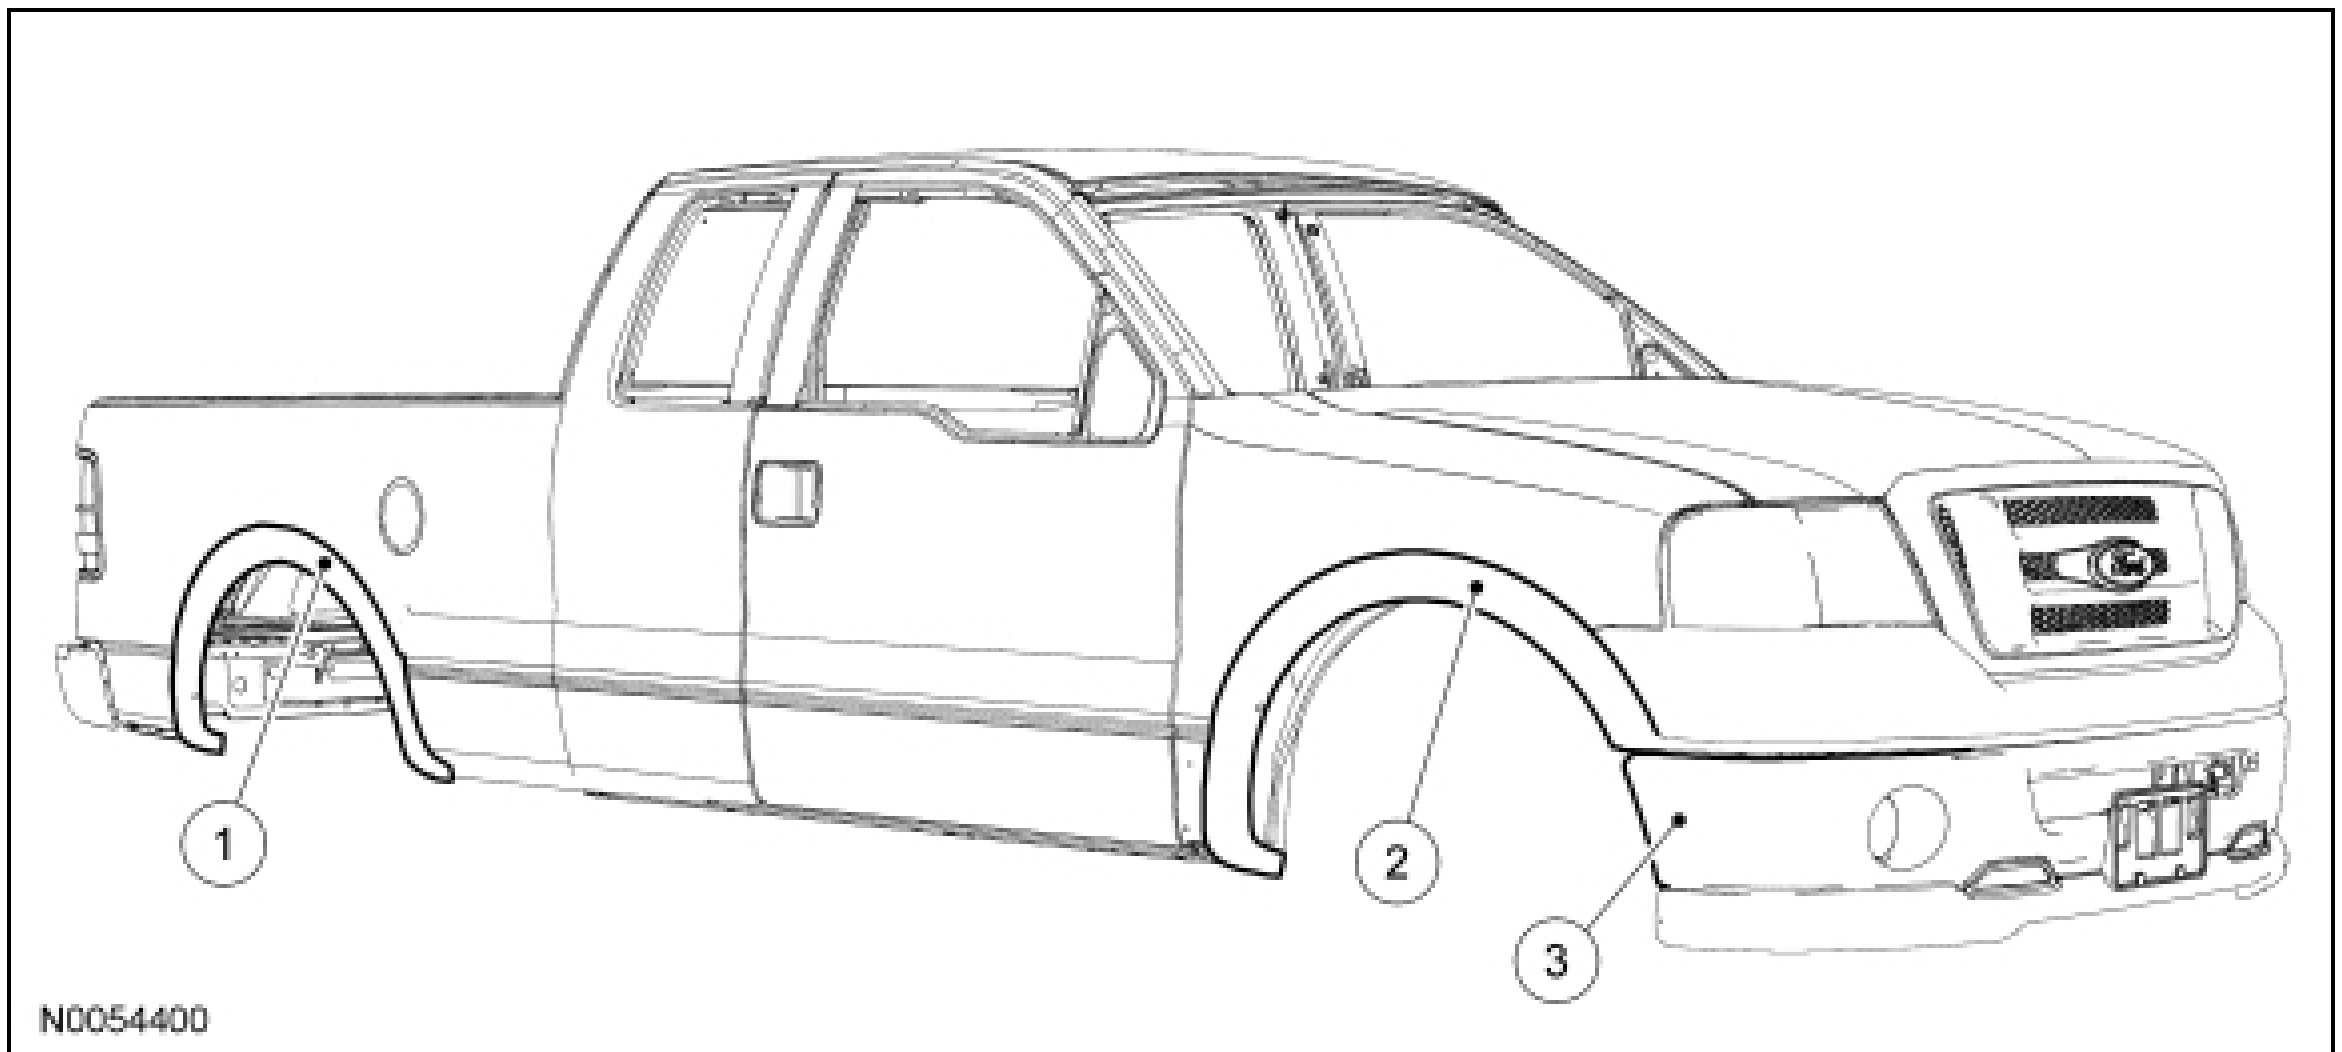

Item	Part Number	Description
1	2916529165 LH/ 29164 RH LH/ 29164 RH	Wheel arch moulding (rear) — Thermoplastic Olefin (TPO)
2	1603916039 LH/ 16038 RH LH/ 16038 RH	Wheel arch moulding (front) — TPO
3	17D95717D957	Bumper cover (front) — TPO

F-150 SVT Raptor

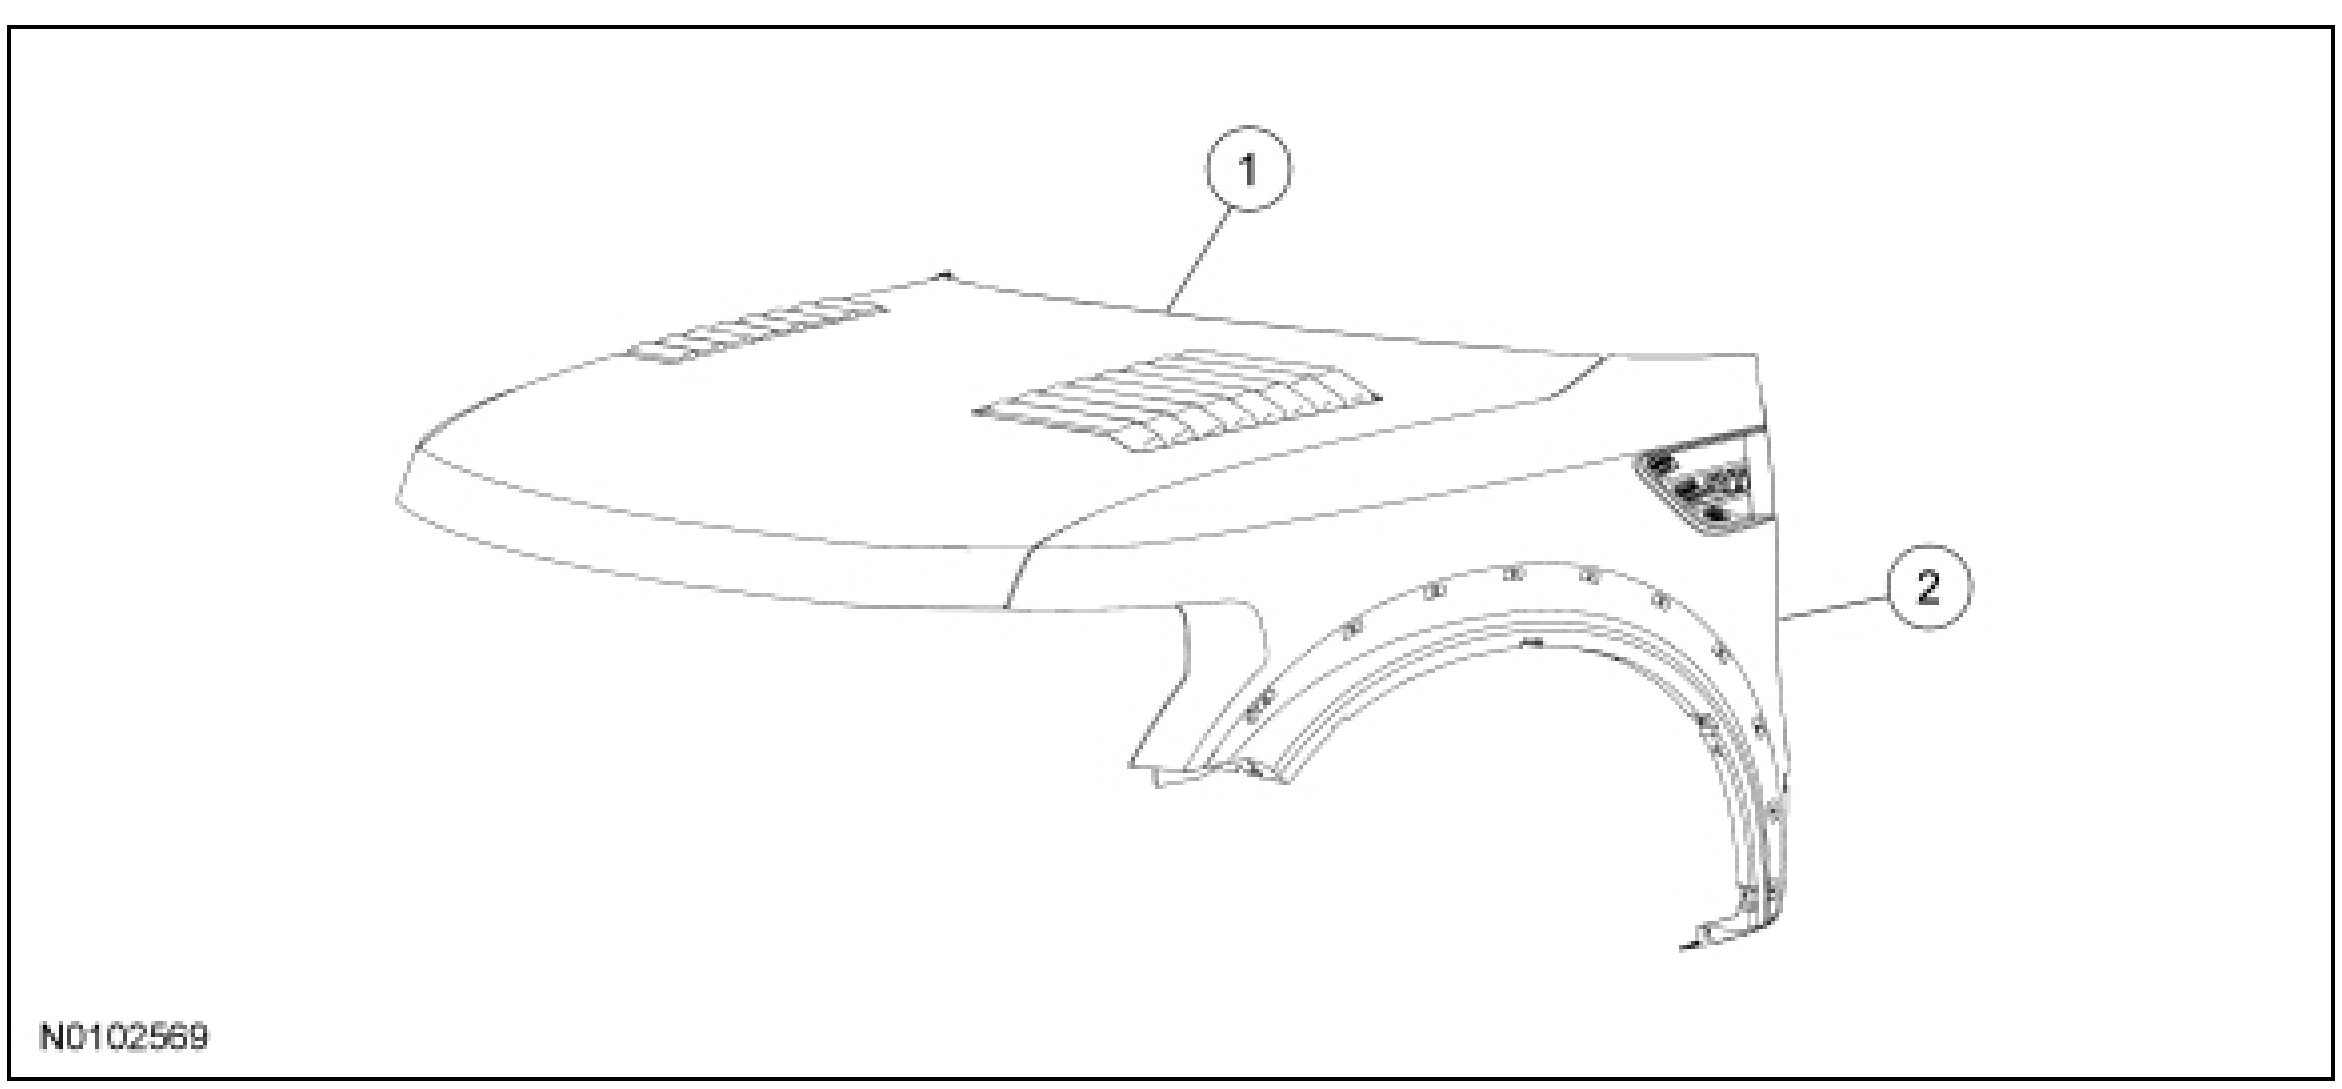

Item	Part Number	Description
1	1661216612	Hood panel — Sheet-Molded Composite (SMC)
2	16006A16006A LH/ 16005A RH LH/ 16005A RH	Fender — SMC

Several considerations will determine viability of plastic repair procedure(s):

- Is the damage cosmetic or structural?
- Can the repair be carried out on the vehicle?
- Is the part readily available?
- Is component repair the most cost effective method?
- Can the component be economically restored to original strength and appearance?
- Will the repair provide for the fastest, highest quality repair?

Several types of plastic are in use for automotive application. However, all plastics will fall into 2 primary categories of thermoplastic or thermosetting plastic.

Thermosetting Plastic

Generally, thermosetting plastics are made with 2-part thermosetting resins. When mixed together, heat is generated, producing a cure that is irreversible. Because of this, thermosetting plastics will require the use of a 2-part adhesive for repair.

Sheet-Molded Composite (SMC)

Sheet-Molded Composite (SMC) is a type of thermosetting plastic that uses glass fibers or nylon fibers in combination with thermosetting polyester resins. When fully cured, SMC is strong and rigid.

SMC is similar to, but not identical to fiberglass. Ford Motor Company uses SMC in components such as fenders, hoods and liftgates.

Thermoplastic Compounds

Thermoplastic compounds are manufactured by a process that is reversible. Thermoplastics can be remolded repeatedly by reheating. This characteristic of thermoplastics makes plastic welding a possible repair alternative. A repair of thermoplastic compounds is still possible through the use of 2-part adhesive and filler repair materials and reinforcements as needed. Thermoplastics are widely used in interior trim components, wheel flares, body side cladding and bumper covers.

Polyolefin

Polyolefins fall into the family of thermoplastics with one unique characteristic: An oily or waxy feel to the material when sanded or ground. Polyolefin lends itself very well to remolding through the use of heat. Because of this, components made of this material lend themselves well to the possibility of plastic welding. Most adhesive repair materials and paint will not bond to surface of a polyolefin unless an adhesion promoter specially formulated for plastic is first applied to the exposed raw surface. Otherwise, polyolefins are repaired like most other thermoplastics. Some typical uses of polyolefins are bumper covers, fan shrouds and wheel housings.

Correct identification of the various types of plastic is necessary to select the appropriate repair method(s) to carry out high quality plastic repairs. Refer to Plastics Identification in this section.