


Thermostatic Expansion Valve

 [Ford Ecat Electronic Parts Catalog](#)

Material


Item	Specification
Motorcraft® PAG Refrigerant Compressor Oil YN-12-D	WSH-M1C231-B

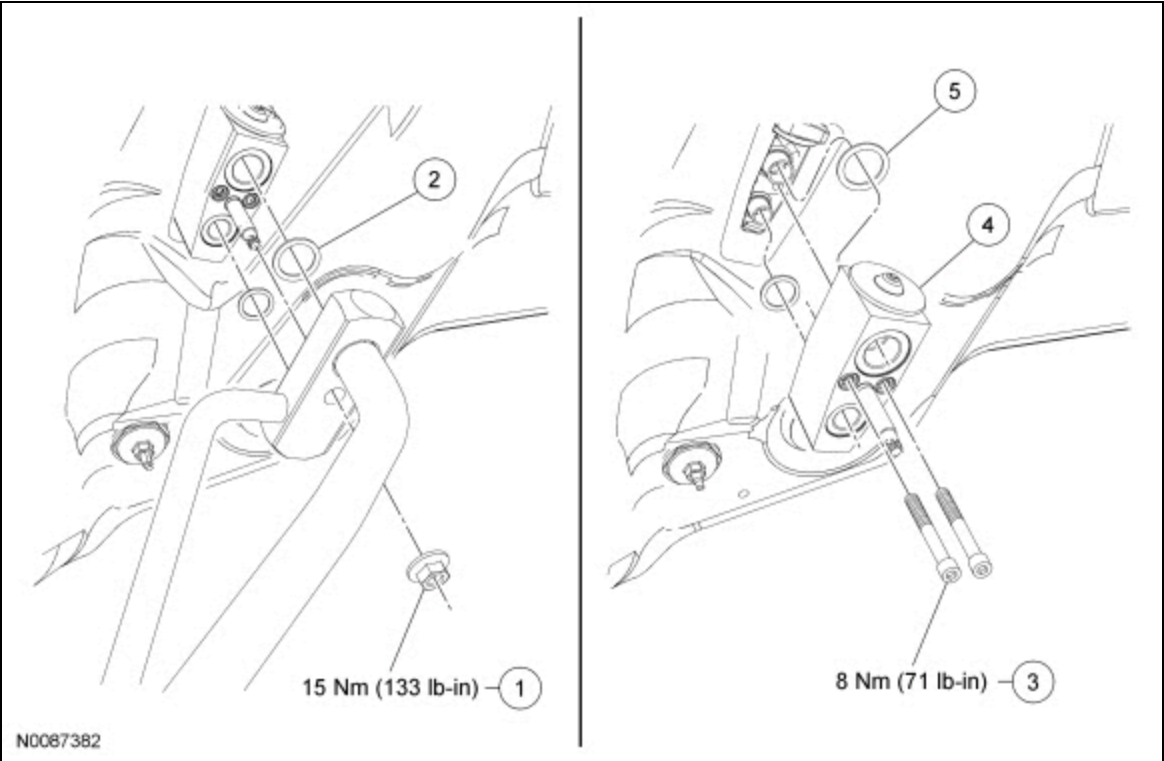

Item	Part Number	Description
1	W505424 W505424	Thermostatic Expansion Valve (TXV) fitting nut
2	19B596 19B596	Gasket seal kit (2 pieces from kit required)
3	—	TXV bolt (part of 19849 kit) (2 required)
4	19849 19849	TXV
5	19B596 19B596	Gasket seal kit (2 pieces from kit required)

Removal and Installation

1. Recover the refrigerant. For additional information, refer to Section 412-00.
2. Remove the Thermostatic Expansion Valve (TXV) manifold and tube bracket bolt.
 - To install, tighten to 8 Nm (71 lb-in).

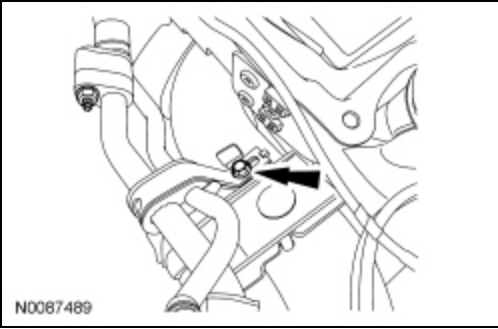

3. Remove the TXV fitting nut and disconnect the fitting.
 - Discard the gasket seals.
 - To install, tighten to 15 Nm (133 lb-in).
4. Remove the 2 TXV bolts.
 - To install, tighten to 8 Nm (71 lb-in).
5. Remove the TXV .
 - Discard the gasket seals.
6. To install, reverse the removal procedure.
 - Install new gasket seals.
 - Add the correct amount of clean PAG oil to the refrigerant system. For additional information, refer to the Refrigerant Oil Adding procedure in Section 412-00.
7. Evacuate, leak test and charge the refrigerant system. For additional information, refer to Section 412-00.