


# Microphone

 [Ford Ecat Electronic Parts Catalog](#)

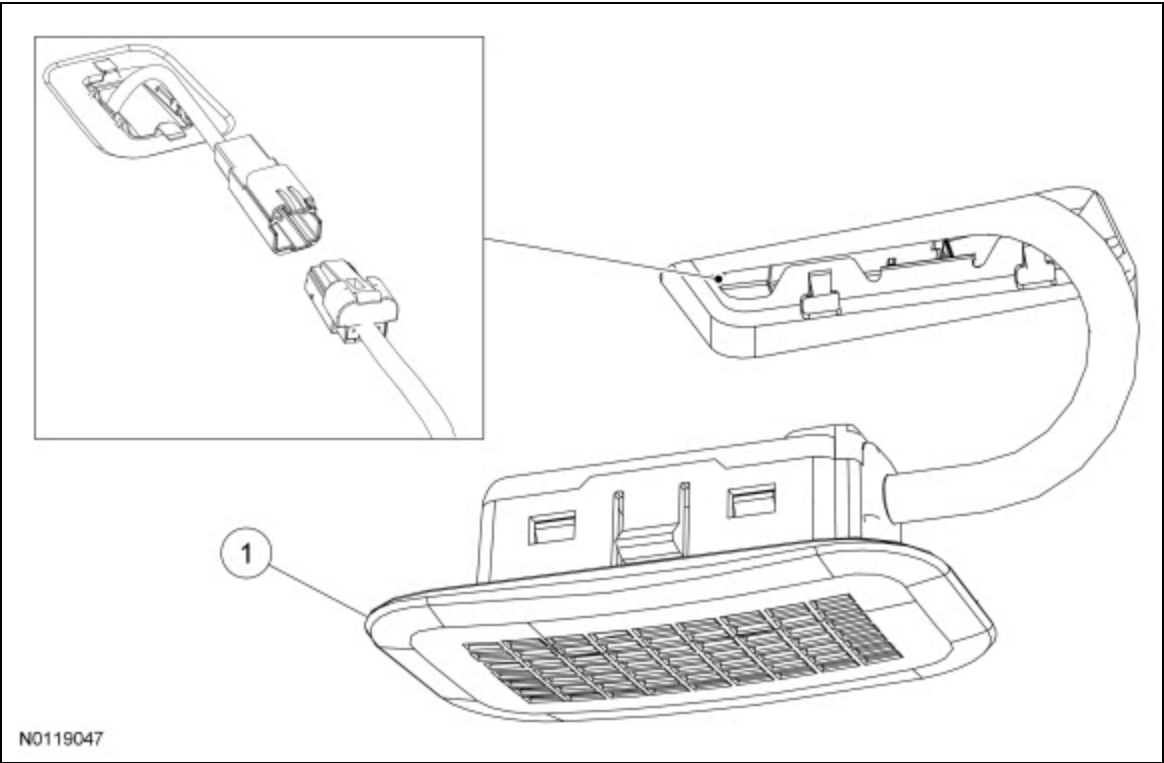

| Item | Part Number                   | Description |
|------|-------------------------------|-------------|
| 1    | 19A391 <a href="#">19A391</a> | Microphone  |

## Removal

- Using a suitable tool, (such as a thin small flat head screwdriver) twist and pry the microphone bezel from the headliner metal mounting bracket.
- Remove the microphone from the headliner by grasping the microphone pigtail.
  - Disconnect the microphone electrical connector.

## Installation

- Reconnect the microphone electrical connector.
- Wrap the connection with anti-rattle tape.
- Feed the microphone pigtail into the headliner through the microphone hole.
  - Verify the microphone pigtail points towards the front of the vehicle.
- Snap the microphone into the headliner mounting bracket.
  - Verify the mounting bracket and microphone are snug to the headliner.