


Modem — Antenna




Removal

NOTE: For vehicles with an in-dash computer, the customer must contact the internet service provider to re-activate the account after the modem-antenna has been replaced. The account must be re-activated before internet services can operate correctly.

1. Turn the ignition to OFF.
2. Remove the LH instrument panel side finish panel.

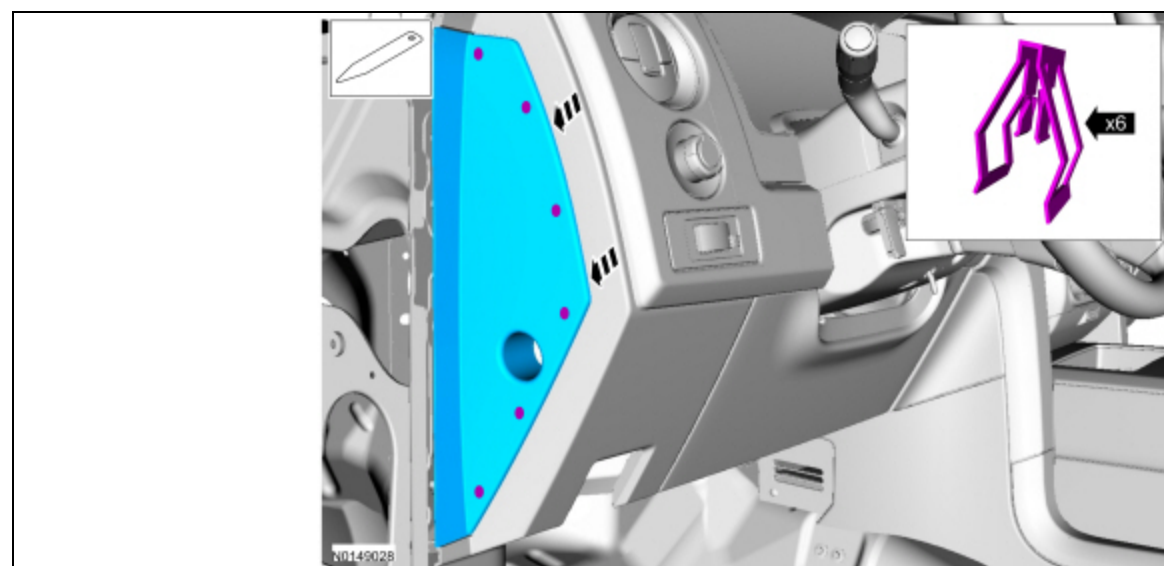

3. Remove the modem-antenna bolt and the modem-antenna.
 - Disconnect the electrical connector.
 - To install, tighten to 30 Nm (22 lb-ft).

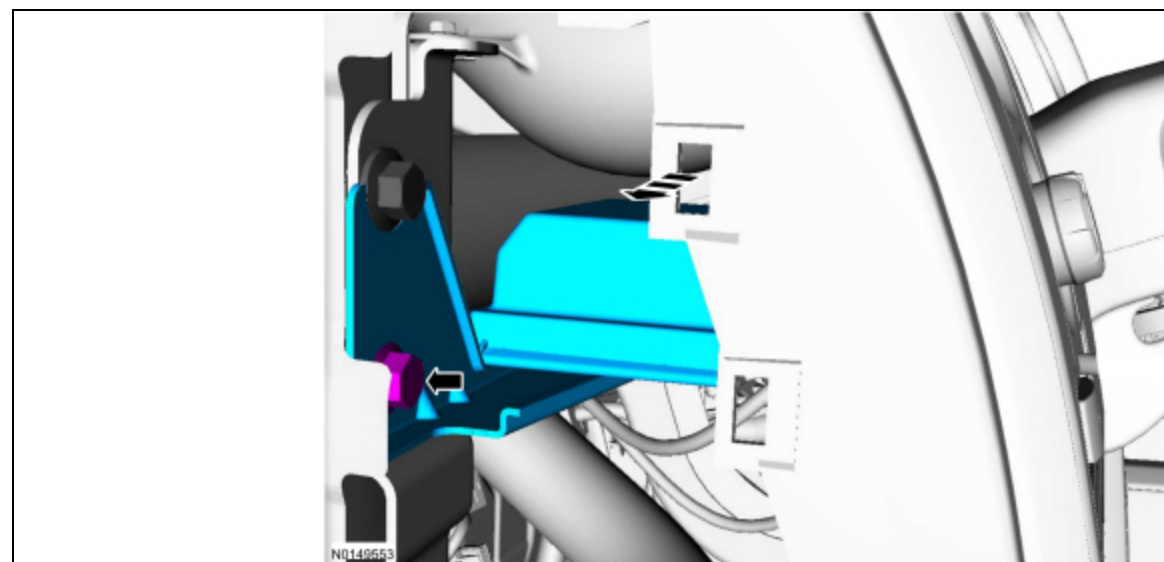

Installation

1. To install, reverse the removal procedure.
2. Initialize the modem-antenna.
 1. Connect all electrical connectors.
 2. Wait 5 minutes after the modem-antenna is installed.
 3. Turn the ignition to RUN.
 4. Wait 10 seconds.
 5. Start the vehicle and run the engine for 30 seconds.
 6. Turn the ignition to OFF.