

# Front Seat Motor Cable




## Removal

**WARNING:** Wear protective gloves when handling components or parts that have pointed or sharp edges. Failure to follow this instruction may result in serious personal injury.

**NOTE:** Typical driver seat shown, others similar.

- 1. Remove the seat. Refer to Seat — Front.
- 2. If equipped.

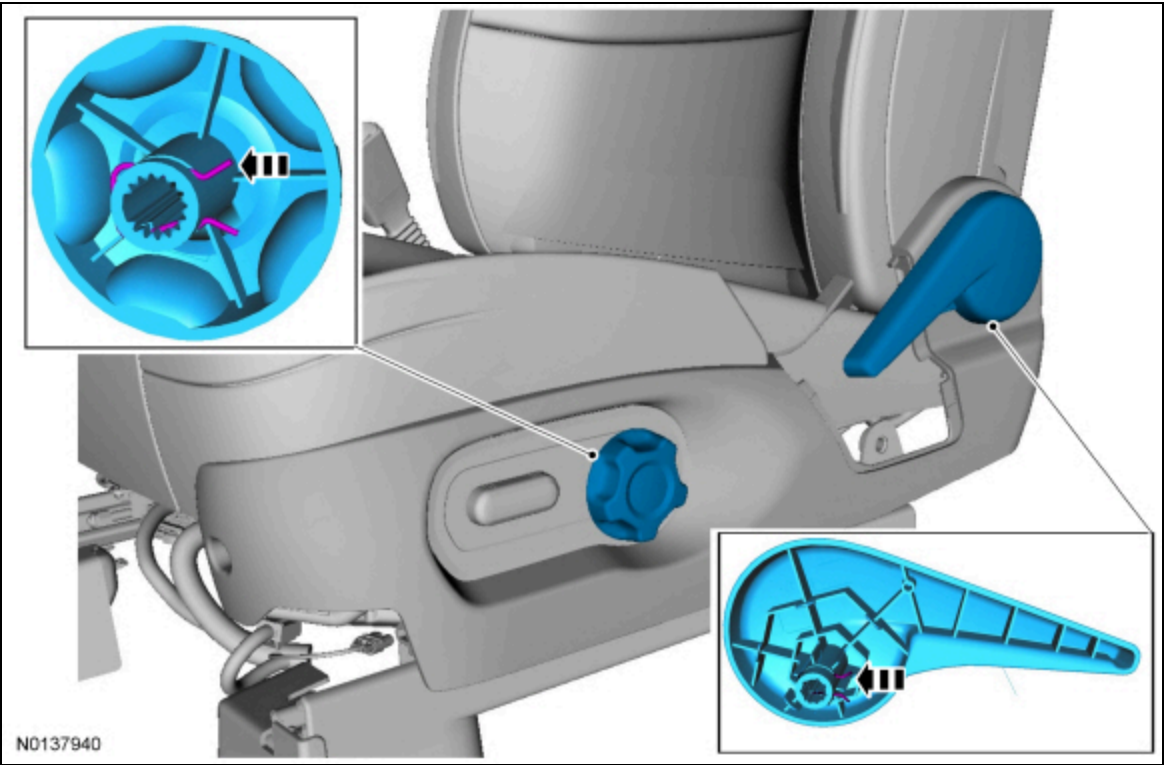


- 3. If equipped.




N0149039

4. Remove the screws and side shield.

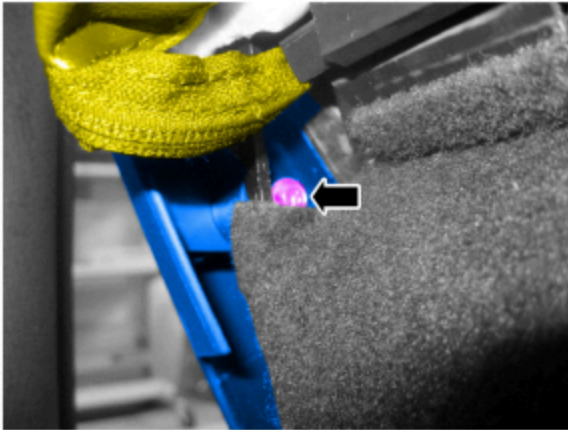

N0148529


5.

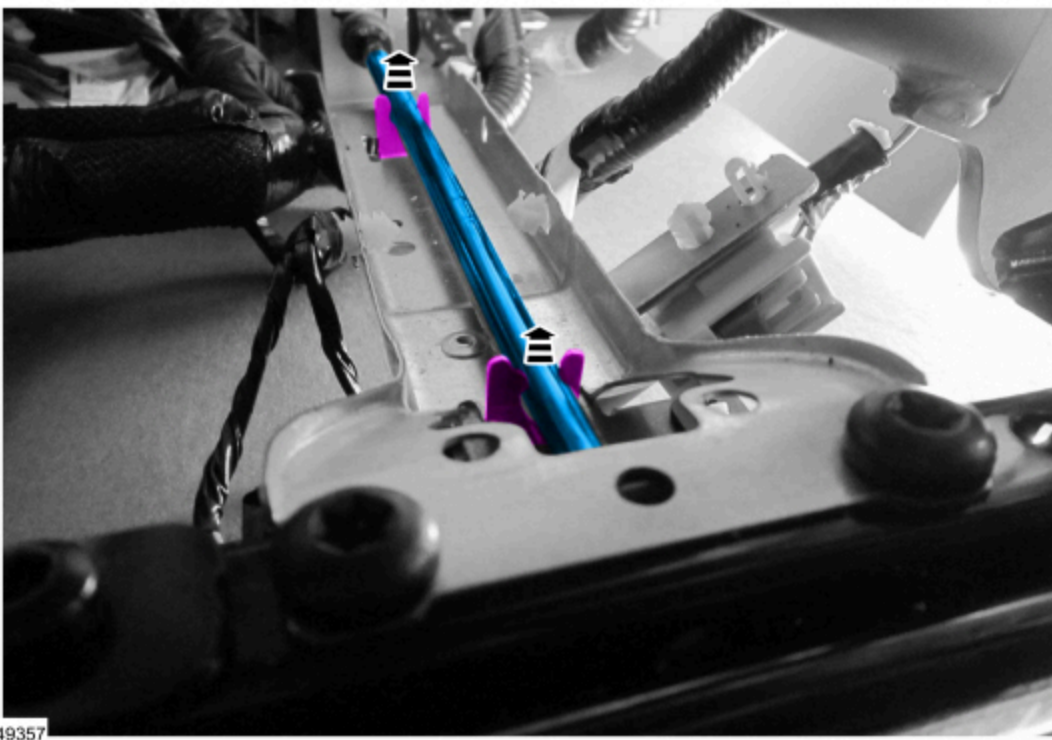

**Installation**

**NOTE:** The front seat motor cable service part for the driver seat is different than the service part for passenger seat. Make sure to install the correct service part required for the seat.

1.

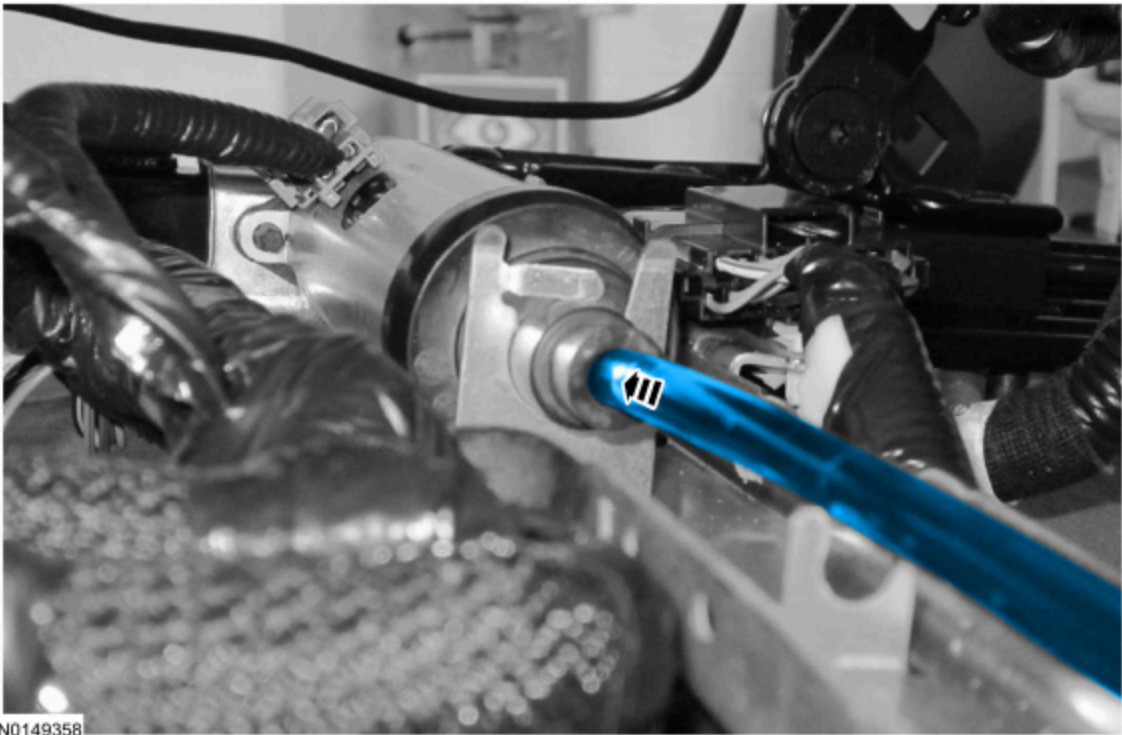

2. **NOTE:** The cable felt covering should not be visible when the cable is correctly engaged to the horizontal motor square drive.

- Push the cable into the horizontal motor square drive twisting back and forth to engage the cable.




3.




4.



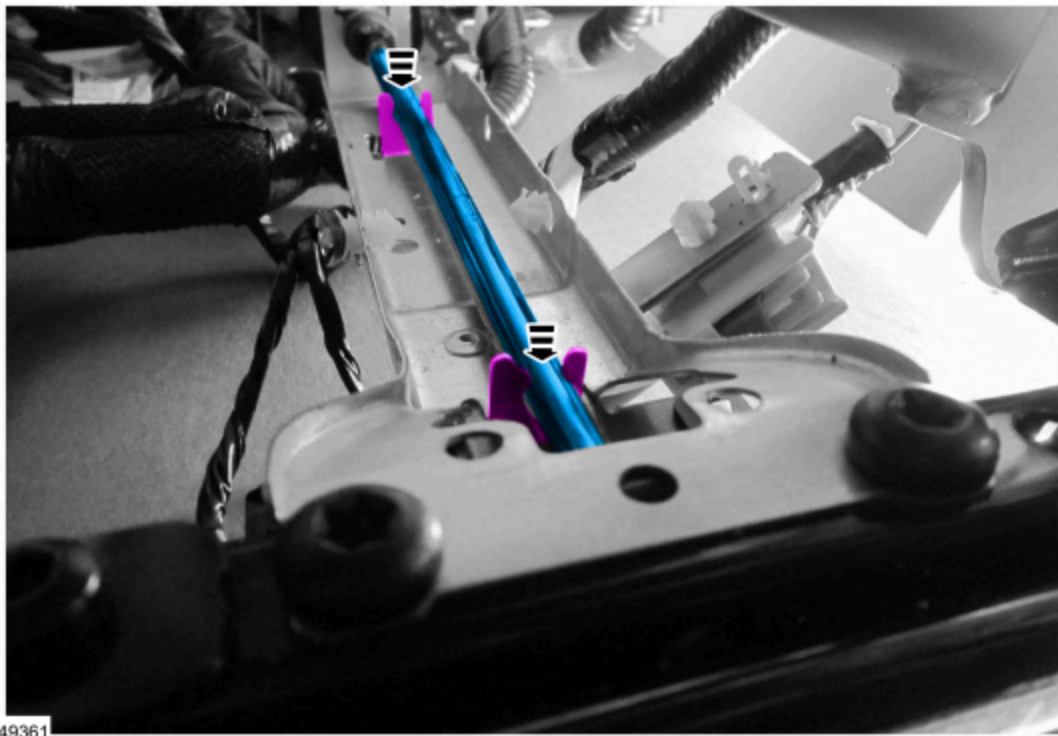

5. Install the side shield and screws.



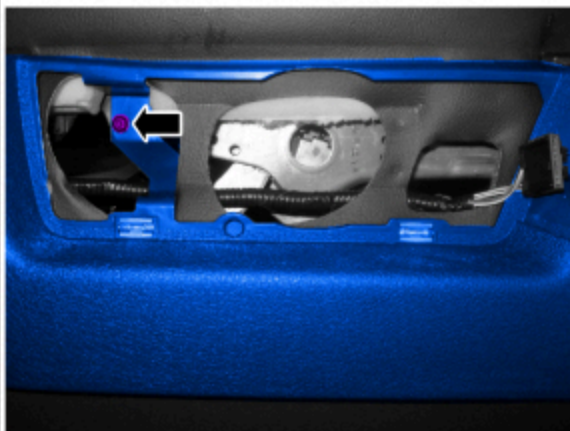


6. If equipped.



N0149040

7. If equipped.

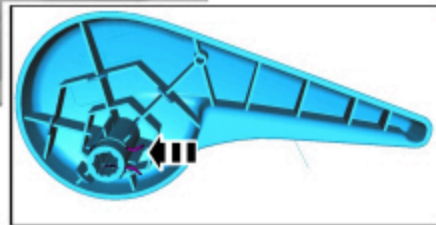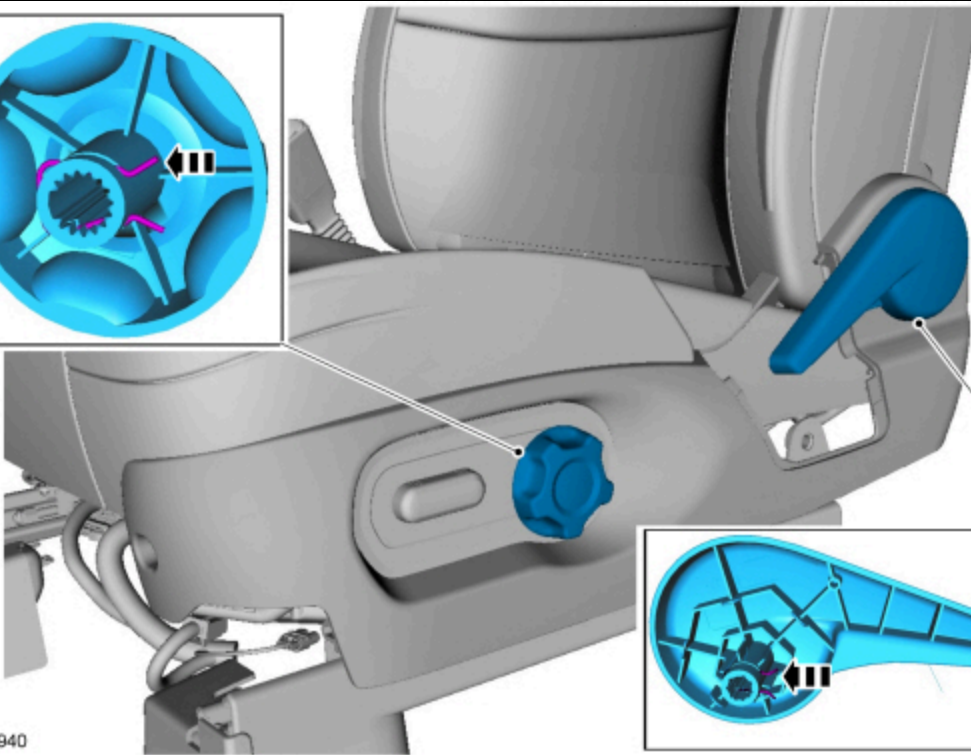

N0137940

8. Install the front seat. Refer to Seat — Front.