


Rear Door Latch — Lower, SuperCab

 [Ford Ecat Electronic Parts Catalog](#)

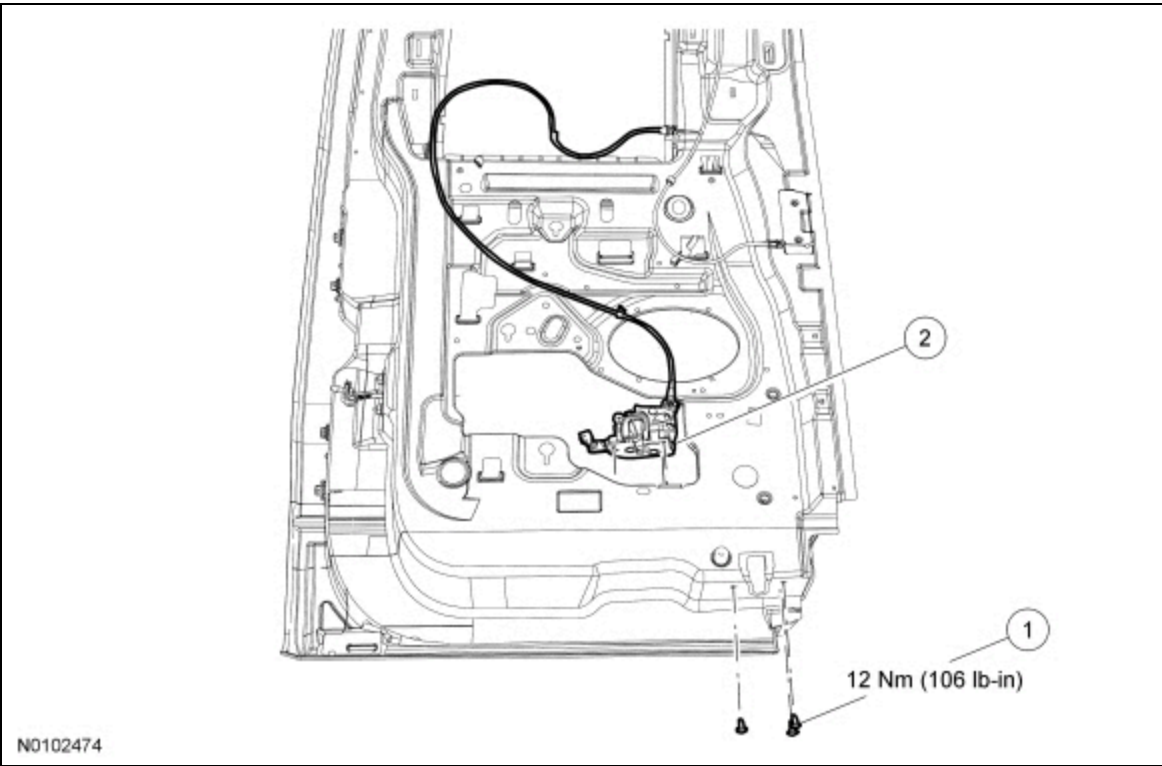

Item	Part Number	Description
1	W714092 W714092	Lower door latch bolts (3 required)
2	18264A01 18264A01 / 18264A00/ 18264A00	Lower door latch and cable (LH/RH)

Removal and Installation

1. Remove the rear door trim panel. For additional information, refer to Section 501-05.
2. Position the water shield aside.
3. Disconnect the door ajar switch electrical connector.
4. Disconnect the lower door latch actuating cable from the interior door handle.
5. Remove the interior door handle actuating cable from the guide clips.
6. Remove the 3 lower door latch bolts and the lower door latch.
 - To install, tighten to 12 Nm (106 lb-in).
7. To install, reverse the removal procedure.