


Safety Belt Twisted at the Safety Belt Guide

 [Ford Ecat Electronic Parts Catalog](#)

NOTE: *These procedures apply to both wire-formed and stamped D-ring designs.*

1. Grasp the safety belt webbing at the shoulder belt guide (D-ring).

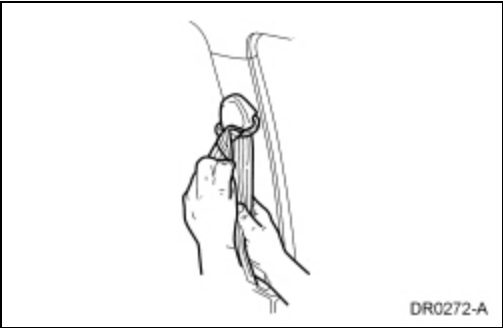

2. Feed the folded portion of the safety belt webbing through the safety belt guide (D-ring) to remove the twist from the belt webbing.

