


Child Safety Seat Tether Anchor



NOTE: *SuperCab shown, other cab styles similar.*

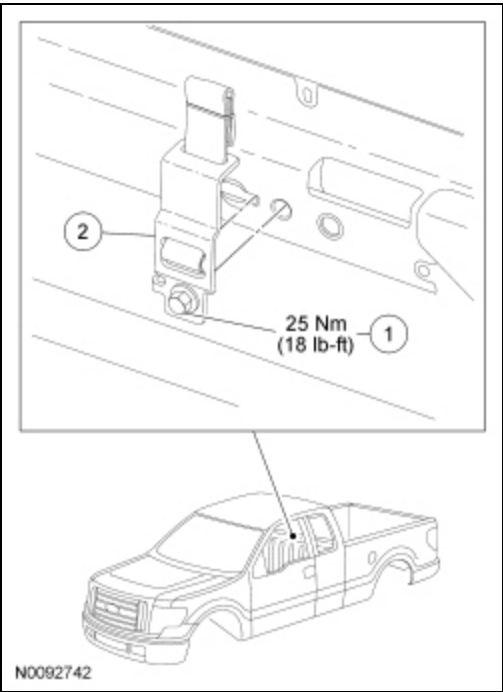


Item	Part Number	Description
1	—	Tether anchor bolt (part of 613D74) (3 required)
2	613D74 613D74	Tether anchor (3 required)

Removal and Installation

WARNING: All seatbelt components must be inspected and corrected as part of any collision repair. Inspect all seatbelt components as prescribed by Seatbelt Procedure After a Collision found in Section 501-20A General Procedures of this manual. Failure to follow this instruction may result in incorrect operation of the seatbelt system and increase the risk of serious personal injury or death in a crash.

WARNING: Always tighten the child safety seat tether anchor/bolt to specification. Failure to follow this instruction may result in the child's safety seat being incorrectly secured, which increases the risk of serious personal injury or death to the child in a sudden stop or crash.

- For Crew Cab vehicles**, fold the rear seat backrest down. For additional information, refer to Seat — Rear, Crew Cab, 60 Percent or Seat — Rear, Crew Cab, 40 Percent in the Removal and Installation portion of Section 501-10.
- For SuperCab vehicles**, remove the rear seat backrest. For additional information, refer to appropriate steps in Seat — Rear, SuperCab in the Removal and Installation portion of Section 501-10.
- For regular cab vehicles**, fold the seat backrest down, remove the 3 pin-type retainers and position the rear sound insulator aside.

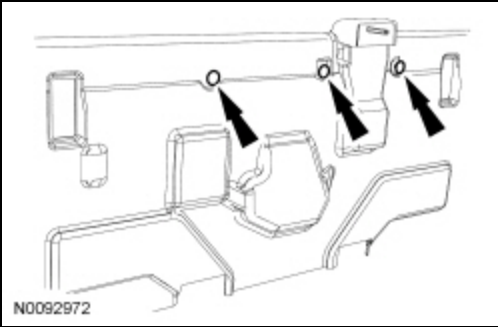

4. Remove the tether anchor bolt(s) and tether anchor(s).

- To install, tighten to 25 Nm (18 lb-ft).

5. To install, reverse the removal procedure.