

Anchoring and Pulling Guidelines



WARNING: Collision damage repair must conform to the instructions contained in this workshop manual. Replacement components must be new, genuine Ford Motor Company parts. Recycled, salvaged, aftermarket or reconditioned parts (including body parts, wheels or safety restraint components) are not authorized by Ford.


Departure from the instructions provided in this manual, including alternate repair methods or the use of substitute components, risks compromising crash safety. Failure to follow these instructions may adversely affect structural integrity and crash safety performance, which could result in serious personal injury to vehicle occupants in a crash.

NOTICE: The unique cab structure design and material characteristics of the cab(s) require unique and specific anchoring equipment to ensure proper restoration of pre-accident condition of the vehicle. In instances of crash damage extending in to the cab platform, the cab may need to be removed from the frame for correct repair. Failure to use the correct equipment or technique recommendations may result in inadvertent additional damage to the cab structure and floor.

NOTICE: Anchoring equipment must be used to hold the cab at both the pinch welds and at all the cab mount isolator locations. Failure to use the correct equipment or technique recommendations may result in inadvertent additional damage to the cab structure and floor.


NOTE: Crew Cab shown, others similar.

1. Anchor the vehicle at both the pinch weld locations and the cab mount locations as indicated in the illustrations. Use the original cab mounting hardware with the anchoring equipment. For dimensional information of the frame and body, refer to Body in this section.

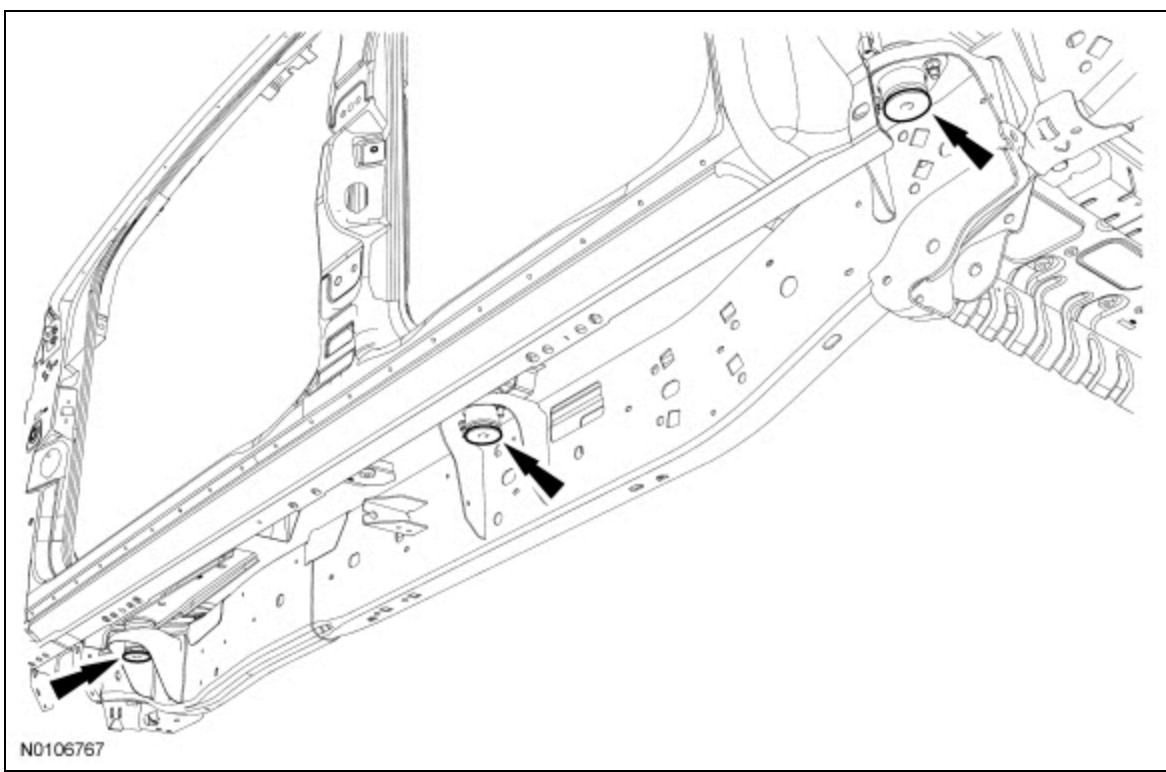

2. **NOTE:** Refer to Inner Body Reinforcing Panels in this section for component identification. Also, refer to the Ford Recommended Steel Repairability Matrix addressed in the Specifications portion of this section for specific repair instructions prior to any cab repairs.

With the body correctly anchored, the full frame must be anchored in a traditional manner to maintain proper body-to-frame relationship providing cab-off repair is not required.

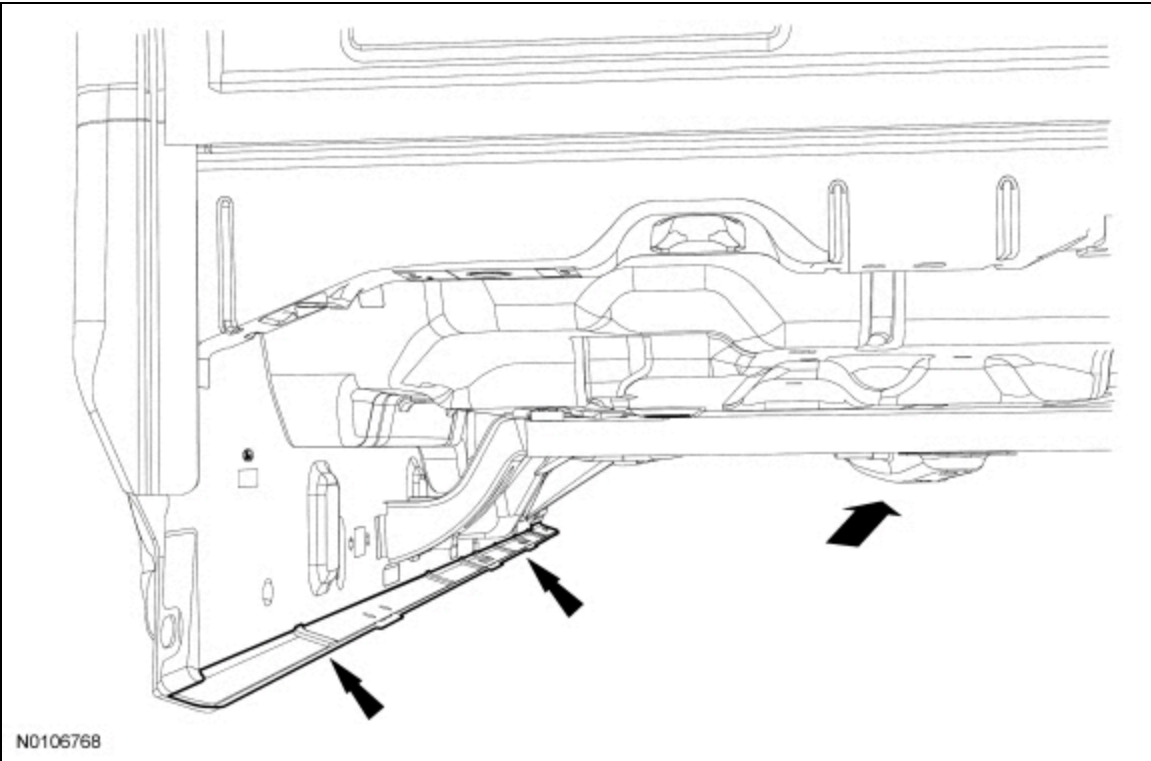

3. When repairs require the removal of the cab structure from the frame, refer to Section 502-02 for cab removal procedure.