


Trailer Hitch



Removal and Installation

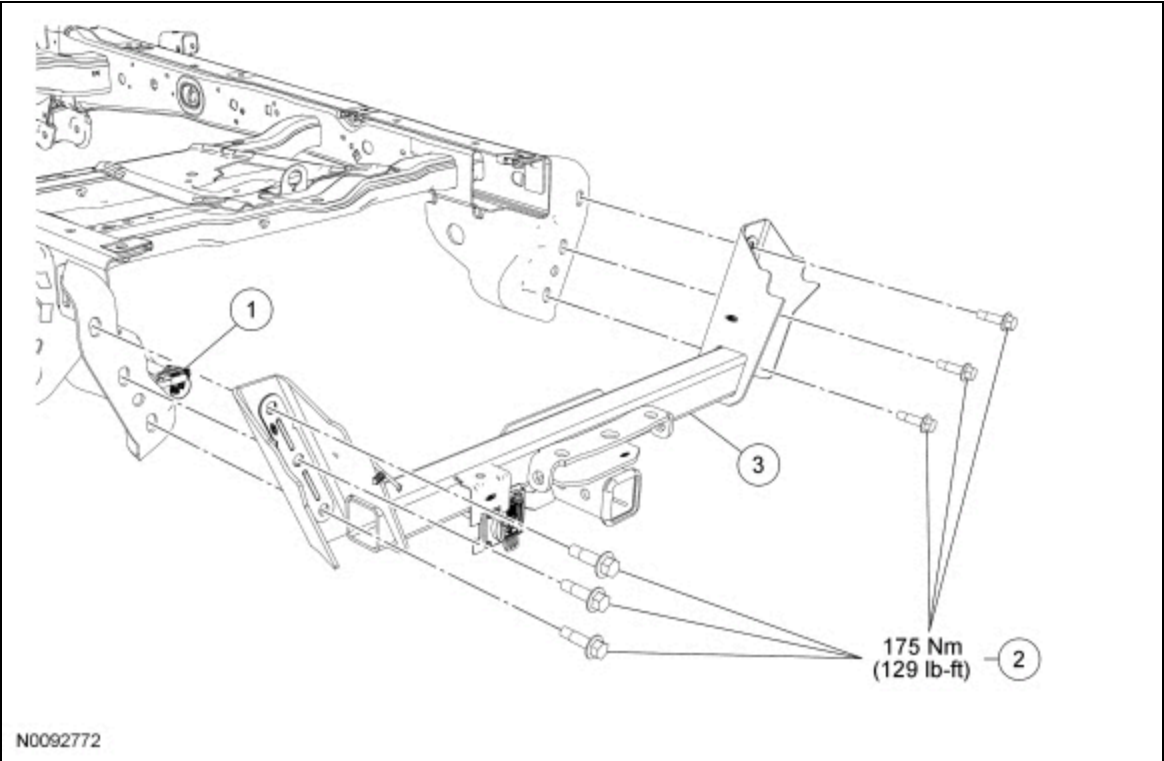

Item	Part Number	Description
1	—	Trailer light/brake electrical connector
2	N811645N811645-S-S	Trailer hitch bolts
3	W504042W504042-S-S	Trailer hitch

1. Remove the rear bumper. For additional information, refer to Section 501-19.
2. Disconnect the trailer light/brake electrical connector.
3. Remove the trailer hitch bolts and remove the trailer hitch.
 - To install, tighten to 175 Nm (129 lb-ft).
4. To install, reverse the removal procedure.