


Crankshaft Pulley

 [Ford Ecat Electronic Parts Catalog](#)

Special Tool(s)

 ST1184-A	3 Jaw Puller 303-D121 or equivalent
 ST2296-A	Installer, Front Cover Oil Seal 303-335
 ST1287-A	Replacer, Crankshaft Vibration Damper 303-102 (T74P-6316-B)
 ST1438-A	Strap Wrench 303-D055 (D85L-6000-A) or equivalent
 ST2834-A	Vehicle Communication Module (VCM) and Integrated Diagnostic System (IDS) software with appropriate hardware, or equivalent scan tool


Material

Item	Specification
Motorcraft® SAE 5W-20 Premium Synthetic Blend Motor Oil (US); Motorcraft® SAE 5W-20 Super Premium Motor Oil (Canada) XO-5W20-QSP (US); CXO-5W20-LSP12 (Canada)	WSS- M2C945-A


Removal

1. With the vehicle in NEUTRAL, position it on a hoist. For additional information, refer to Section 100-02.
2. Remove the accessory drive belt and the A/C belt. For additional information, refer to Section 303-05.

3. Using the Strap Wrench, remove the crankshaft pulley bolt and washer.
 - Discard the bolt.

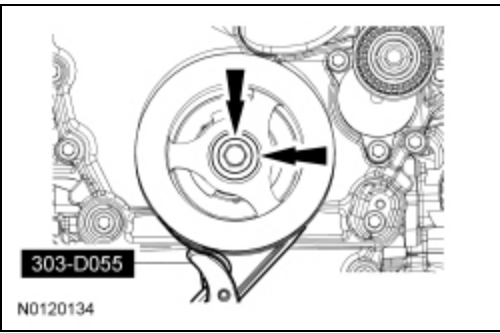


4. Using the 3 Jaw Puller, remove the crankshaft pulley.
 - Inspect the crankshaft pulley sealing surface for nicks or scratches that may effect the crankshaft front seal lip, replace the crankshaft pulley if necessary.

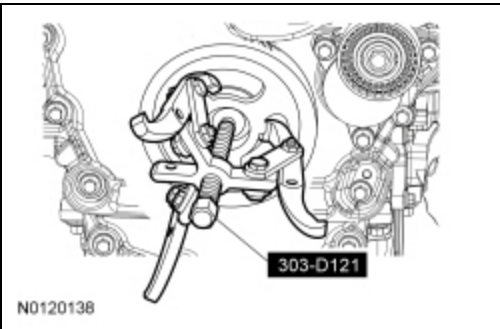


Installation

1. Lubricate the crankshaft front seal inner lip with clean engine oil.
2. **NOTE:** *Lubricate the outside diameter sealing surfaces with clean engine oil.*

Using the Front Cover Oil Seal Installer and Crankshaft Vibration Damper Replacer, install the crankshaft pulley.

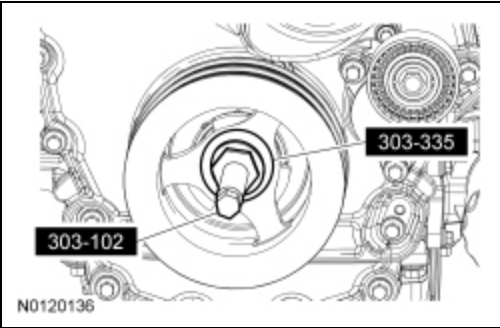

3. Using the Strap Wrench, install the crankshaft pulley washer and new bolt and tighten in 4 stages.
 - Stage 1: Tighten to 120 Nm (89 lb-ft).
 - Stage 2: Loosen one full turn.
 - Stage 3: Tighten to 50 Nm (37 lb-ft).
 - Stage 4: Tighten an additional 90 degrees.

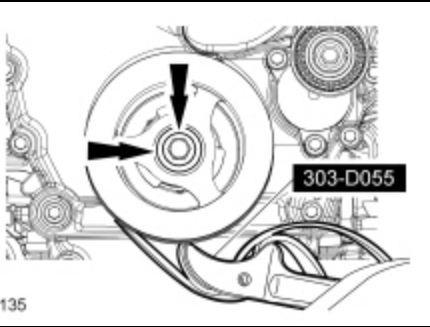

4. Install the accessory drive belt and the A/C belt. For additional information, refer to Section 303-05.
5. After completing the repairs, use the scan tool to perform the Misfire Monitor Neutral Profile Correction procedure following the on-screen instructions.