

Valve Tappets




Material	
Item	Specification
Motorcraft® SAE 5W-20 Premium Synthetic Blend Motor Oil (US); Motorcraft® SAE 5W-20 Super Premium Motor Oil (Canada) XO-5W20-QSP (US); CXO-5W20-LSP12 (Canada)	WSS-M2C945-A

Removal and Installation

NOTICE: During engine repair procedures, cleanliness is extremely important. Any foreign material, including any material created while cleaning gasket surfaces that enters the oil passages, coolant passages or the oil pan, may cause engine failure.

1. Depending on the valve tappets being serviced, remove the LH and/or the RH camshafts. For additional information, refer to Camshaft — RH and/or the Camshaft — LH in this section.
2. **NOTE:** *If the components are to be reinstalled, they must be installed in the same positions. Mark the components for installation into their original locations.*

Remove the valve tappets from the cylinder head.

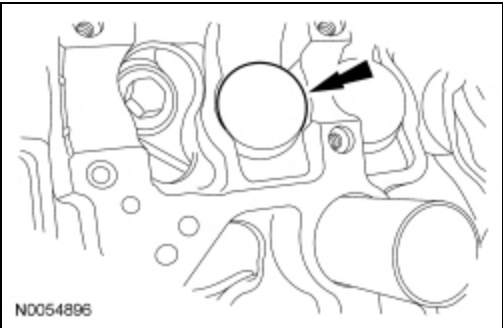

3. **NOTE:** *The valve tappets must be installed in their original positions.*

NOTE: *Coat the valve tappets with clean engine oil prior to installation.*

To install, reverse the removal procedure.