


Flexplate

 [Ford Ecat Electronic Parts Catalog](#)

Special Tool(s)

 ST2834-A	Vehicle Communication Module (VCM) and Integrated Diagnostic System (IDS) software with appropriate hardware, or equivalent scan tool
--	---

Removal


1. With the vehicle in NEUTRAL, position it on a hoist. For additional information, refer to Section 100-02.
2. Remove the automatic transmission. For additional information, refer to Section 307-01.
3. Remove the 8 bolts and the flexplate.

Installation

1. **NOTE:** *One of the 8 flexplate holes are offset so the flexplate can only be installed in one position.*

Install the flexplate and the 8 bolts and tighten in sequence shown.

- Tighten to 80 Nm (59 lb-ft).

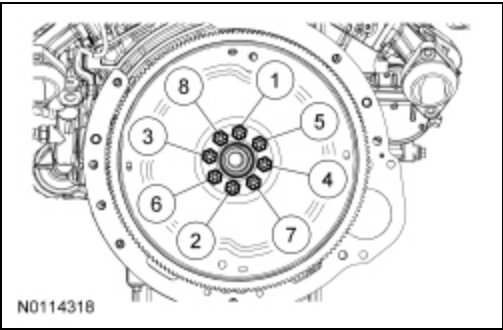

2. Install the automatic transmission. For additional information, refer to Section 307-01.
3. After completing the repairs, use the scan tool to perform the Misfire Monitor Neutral Profile Correction procedure following the on-screen instructions.