


Flexplate

 [Ford Ecat Electronic Parts Catalog](#)

Special Tool(s)


 ST2834-A	Vehicle Communication Module (VCM) and Integrated Diagnostic System (IDS) software with appropriate hardware, or equivalent scan tool
--	---

Removal and Installation

1. Remove the transmission. For additional information, refer to Section 307-01.
2. **NOTE:** *The flexplate bolts are torque-to-yield design and are not reusable.*

Remove the 8 bolts and the flexplate.

- Discard the bolts.
- To install, tighten in the sequence shown in 2 stages.
 - Stage 1: Tighten to 20 Nm (177 lb-in).
 - Stage 2: Tighten an additional 60 degrees.

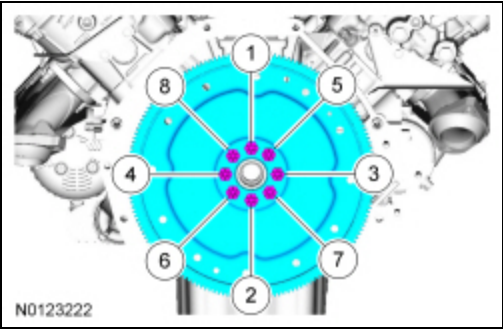

3. To install, reverse the removal procedure.
 - After completing the repairs, use the scan tool to perform the Misfire Monitor Neutral Profile Correction procedure, following the on-screen instructions.