


Oil Pump Screen and Pickup Tube




Material	
Item	Specification
Motorcraft® SAE 5W-20 Synthetic Blend Motor Oil (US); Motorcraft® SAE 5W-20 Super Premium Motor Oil (Canada) XO-5W20-QSP (US); CXO-5W20-LSP12 (Canada)	WSS-M2C945-A

Removal

1. Remove the oil pan. For additional information, refer to Oil Pan in this section.
2. Remove the oil pump screen and pickup tube support bracket nut.

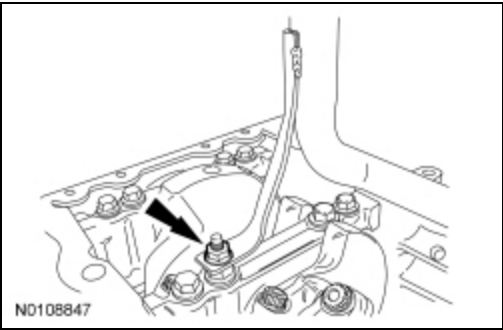

3. Remove the 2 bolts and the oil pump screen and pickup tube.

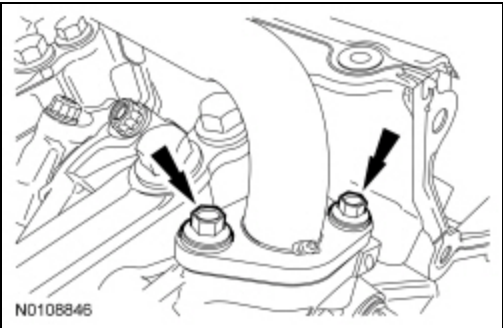


Installation

1. **NOTICE:** Make sure the O-ring is in place and not damaged. A missing or damaged O-ring can cause foam in the lubrication system, low oil pressure and severe engine damage.

NOTE: Clean and inspect the mating surfaces and install a new O-ring. Lubricate the O-ring with clean engine oil prior to installation.


Position the oil pump screen and pickup tube and install the 2 front bolts.

- Tighten to 10 Nm (89 lb-in).

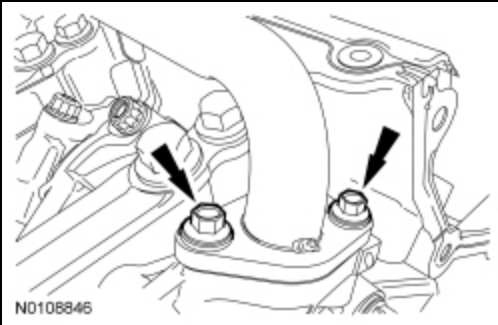

2. Install the oil pump screen and pickup tube support bracket nut.

- Tighten to 24 Nm (18 lb-ft).

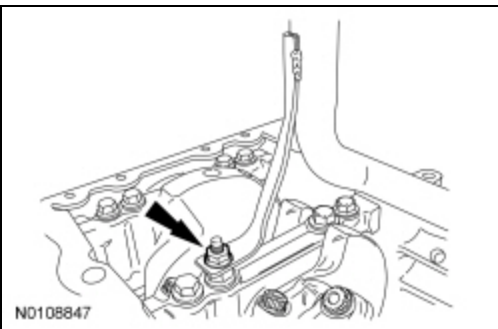

3. Install the oil pan. For additional information, refer to Oil Pan in this section.