


Coolant Crossover Manifold Assembly — 3.5L GTDI

 [Ford Ecat Electronic Parts Catalog](#)

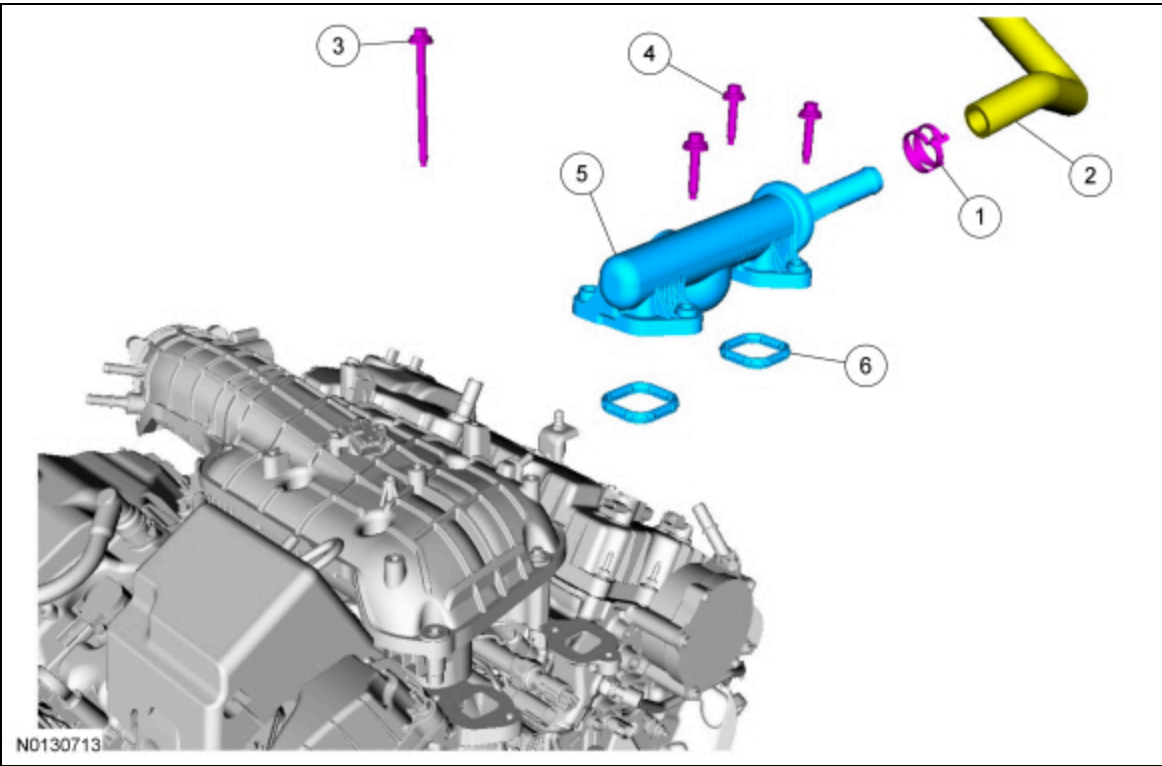

Item	Part Number	Description
1	W527362 W527362	Heater hose clamp
2	18472 18472	Heater hose
3	W714988 W714988	Intake manifold bolt
4	W503279 W503279	Coolant crossover manifold assembly bolt (3 required)
5	8C3688 8C368	Coolant crossover manifold assembly
6	9439 9439	Coolant crossover manifold assembly gasket (2 required)

Removal

1. Drain the cooling system. For additional information, refer to Cooling System Draining, Filling and Bleeding in this section.
2. Remove the intake manifold. For additional Information, refer to Section 303-01A.
3. Release the clamp and disconnect the heater hose from the coolant crossover manifold assembly.
4. Remove the 3 bolts and the coolant crossover manifold assembly.
 - Remove and discard the gaskets.

Installation

1. Install new gaskets, position the coolant crossover manifold assembly and install the bolts finger tight.

2. Tighten the bolts in 2 stages.
 - Stage 1: Tighten to 10 Nm (89 lb-in).
 - Stage 2: Tighten an additional 45 degrees.
3. Connect the heater hose and position the clamp.
4. Install the intake manifold. For additional Information, refer to Section 303-01A.
5. Fill and bleed the cooling system. For additional information, refer to Cooling System Draining, Filling and Bleeding in this section.