


# Coolant Inlet Pipe — 3.5L GTDI

 [Ford Ecat Electronic Parts Catalog](#)

Material

| Item                                                                                 | Specification |
|--------------------------------------------------------------------------------------|---------------|
| Motorcraft® Orange Antifreeze/Coolant Concentrated<br>VC-3-B (US); CVC-3-B2 (Canada) | WSS-M97B44-D  |

**NOTE:** Intake manifold removed for clarity.

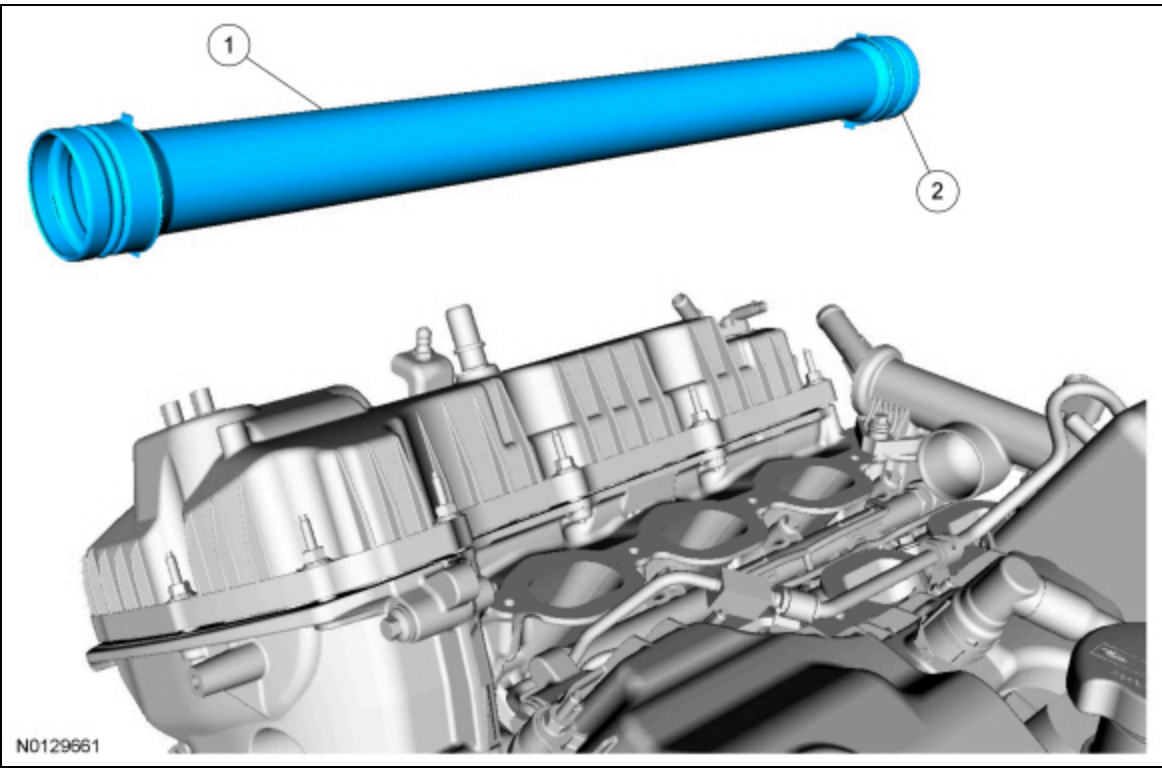

| Item | Part Number                 | Description                    |
|------|-----------------------------|--------------------------------|
| 1    | 8A505 <a href="#">8A505</a> | Coolant inlet pipe             |
| 2    | 8527 <a href="#">8527</a>   | Coolant inlet pipe O-ring seal |

## Removal and Installation

1. Remove the thermostat housing. For additional information, refer to Thermostat Housing — 3.5L GTDI in this section.
2. Remove the cooling fan motor and shroud. For additional information, refer to Cooling Fan Motor and Shroud.
3. Remove the coolant inlet pipe.
  - Remove and discard the O-ring seal.
4. To install, reverse the removal procedure.

- Install a new O-ring seal and lubricate it with clean engine coolant.