


Air Cleaner Outlet Pipe — 3.5L GTDI



NOTICE: Whenever turbocharger air intake system components are removed, always cover open ports to protect from debris. It is important that no foreign material enter the system. The turbocharger compressor vanes are susceptible to damage from even small particles. All components should be inspected and cleaned, if necessary, prior to installation or reassembly.

1.
 - Tighten to 5Nm (44 lb-in).

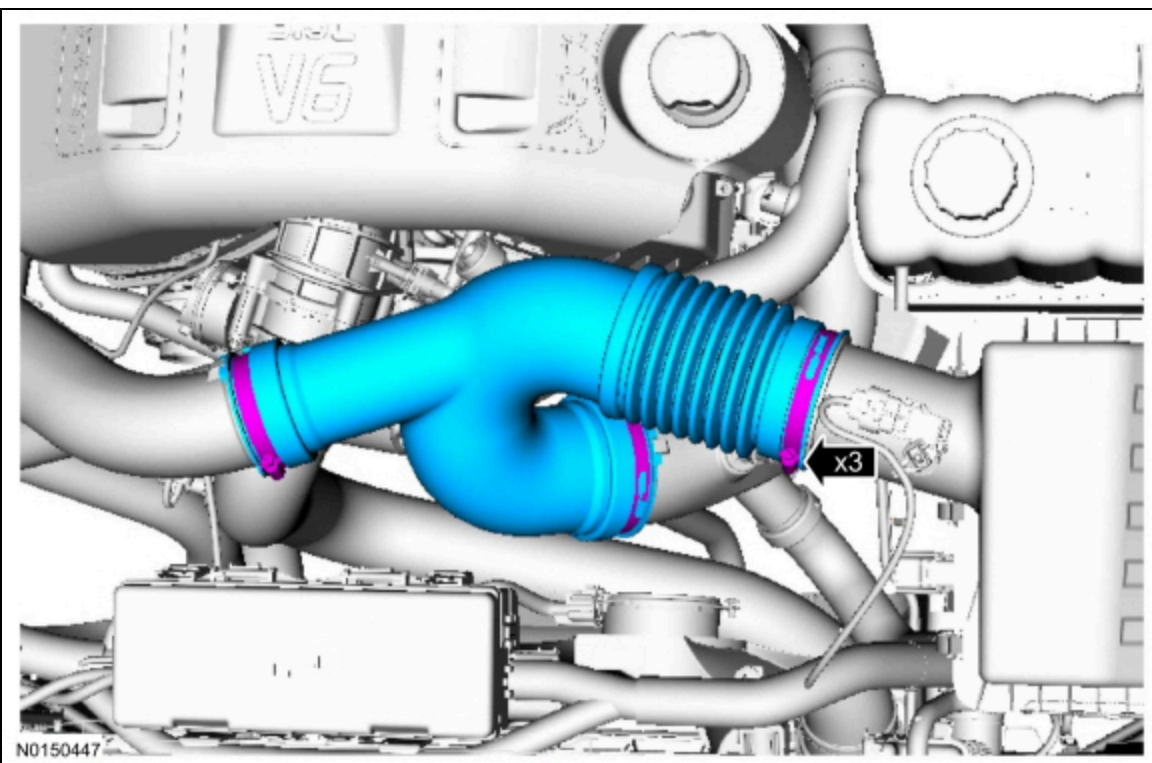

2. To install, reverse the removal procedure.