


Brake Disc Shield



Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the rear axle. For additional information, refer to Section 205-02A or Section 205-02B.
2. Remove the parking brake shoes. For additional information, refer to Section 206-05.
3. To install, tighten to 14 Nm (124 lb-in).

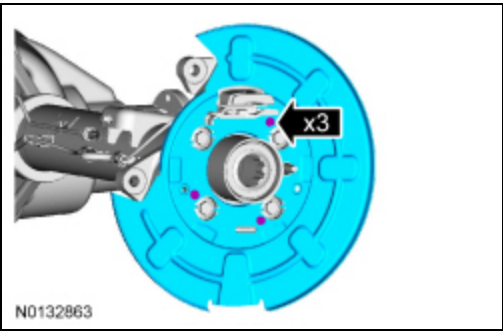

Installation

1. To install, reverse the removal procedure.