

Brake Disc



Material	
Item	Specification
Motorcraft® Metal Brake Parts Cleaner (US) / Motorcraft® Brake Parts Cleaner (Canada) PM-4-A or PM-4-B (US); CPM-4 (Canada)	—


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Remove the wheel and tire. For additional information, refer to Section 204-04.
2. **NOTICE: Do not allow the caliper assembly to hang from the brake hose or damage to the hose can occur.**

Relocate and support the component.

- To install, tighten to 150 Nm (111 lb-ft).

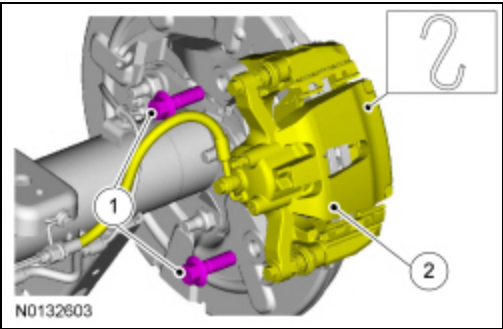


3.

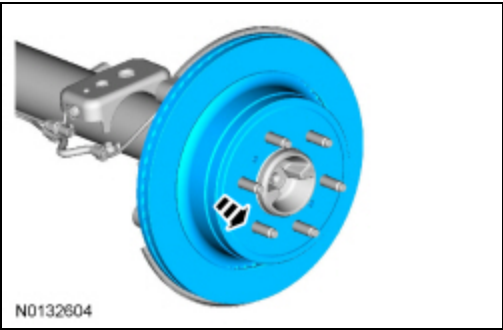

Installation

1. Apply the specified chemical with a spray can. Clean the specified component with the specified material.

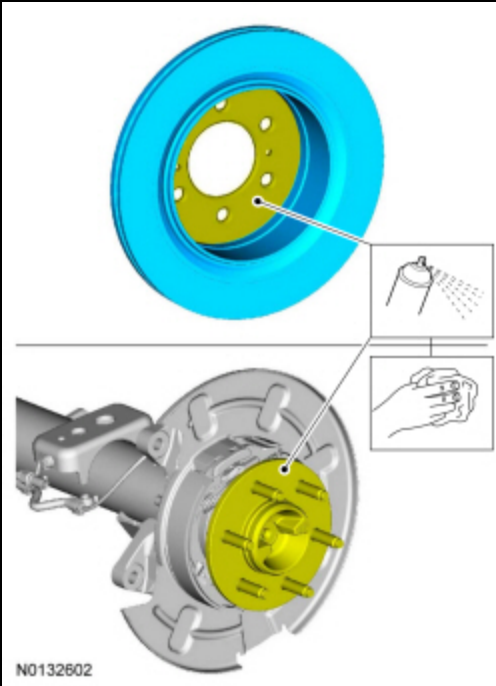

2. To install, reverse the removal procedure.

- Apply brakes several times to verify correct brake operation.