

Brake Pads



Material

Item	Specification
Molykote® M77 8U7Z-19A506-A	—

Removal


WARNING: Do not use any fluid other than clean brake fluid meeting manufacturer's specification. Additionally, do not use brake fluid that has been previously drained. Following these instructions will help prevent system contamination, brake component damage and the risk of serious personal injury.

WARNING: Carefully read cautionary information on product label. For emergency medical information seek medical advice. In the USA or Canada on Ford/Motorcraft products call the Poison Control Center at: 1-800-959-3673. For additional information, consult the product Material Safety Data Sheet (MSDS) if available. Failure to follow these instructions may result in serious personal injury.


WARNING: Always install new brake shoes or pads at both ends of an axle to reduce the possibility of brakes pulling vehicle to one side. Failure to follow this instruction may result in uneven braking and serious personal injury.

NOTICE: Do not spill brake fluid on painted or plastic surfaces or damage to the surface may occur. If brake fluid is spilled onto a painted or plastic surface, immediately wash the surface with water.


- 1. Visual check. Extract the fluid with a syringe.
If necessary, remove fluid until the brake master cylinder reservoir is half full.

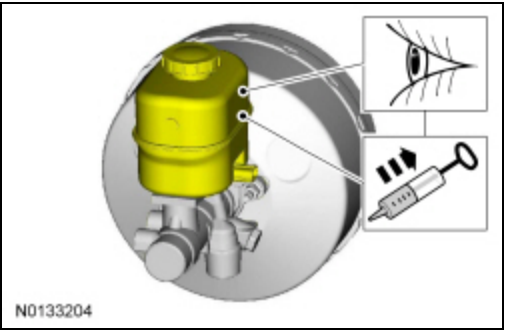

- 2. Remove the wheel and tire. For additional information, refer to Section 204-04.
- 3. **NOTICE:** Do not allow the caliper to hang from the brake hose or damage to the hose can occur.
Relocate and support the component.

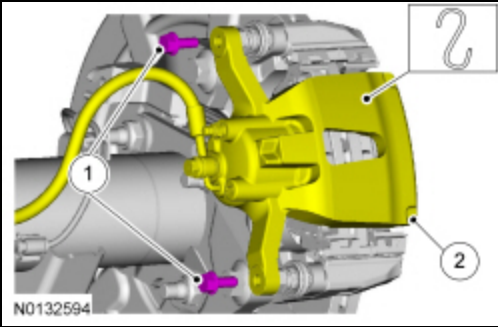


4.

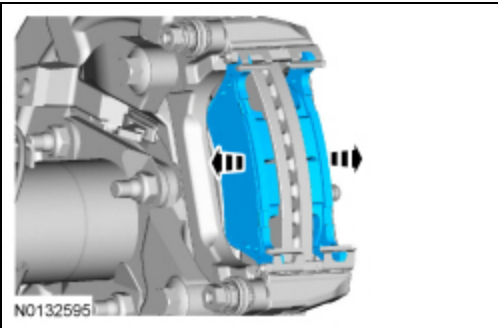


5. Visual check.

Measure the brake disc thickness and install a new brake disc if it is not within specification.

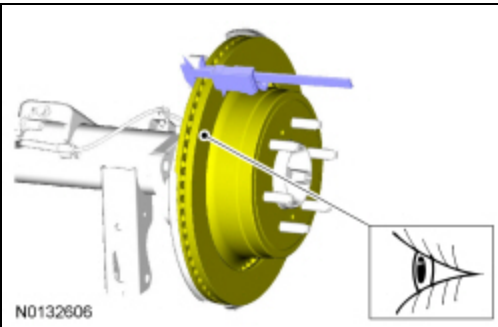


6.

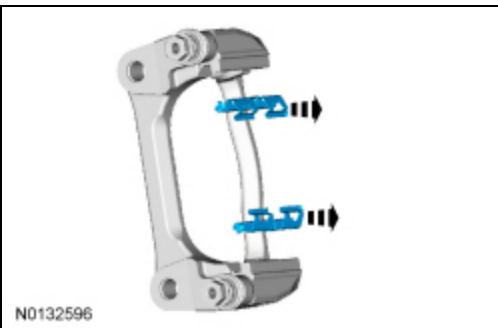

Installation


NOTE: If installing new brake pads, make sure to install all new hardware and specified lubricant supplied with the brake pad kit. Refer to the brake pad instruction sheet when applying lubricant.

1. NOTICE: Protect the caliper pistons and boots when pushing the caliper piston into the caliper piston bores or damage to components may occur.

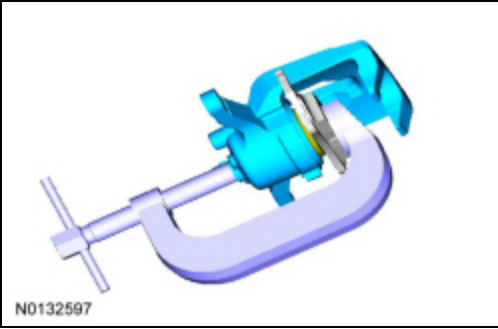


2. **NOTICE:** Do not allow grease, oil, brake fluid or other contaminants to contact the pad lining material or damage to components may occur. Do not install contaminated pads.

NOTE: Install all new hardware supplied with the pad kit.

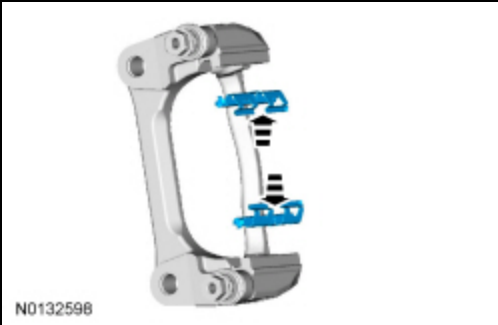


3.

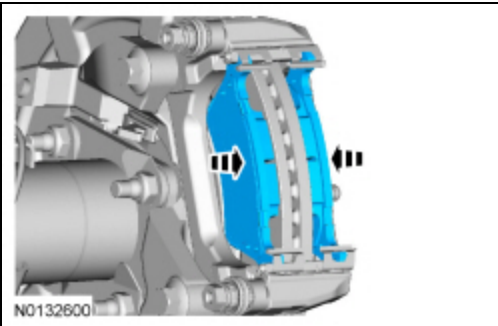

4.

- Tighten to 33 Nm (24 lb-ft).

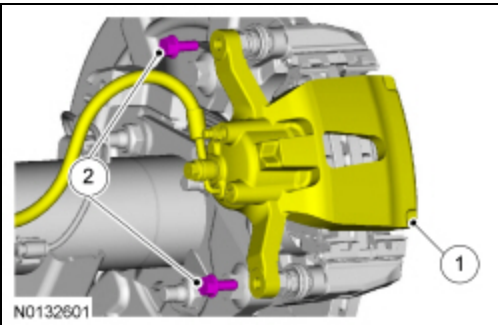

5. Fill the master cylinder with clean specified brake fluid.

- Apply brakes several times to verify correct brake operation.

6. Install the wheel and tire. For additional information, refer to Section 204-04.

- Apply brakes several times to verify correct brake operation.