


Breakout board 20-pin header (straight IDC ribbon, pin 1 to pin 1)


Screw terminals: the same slots in the same order. Each switch uses two neighbouring terminals (A, B).


A: through the switch's diode to its row. B: its column (GP19 slot: GPIO 19 and GND).
























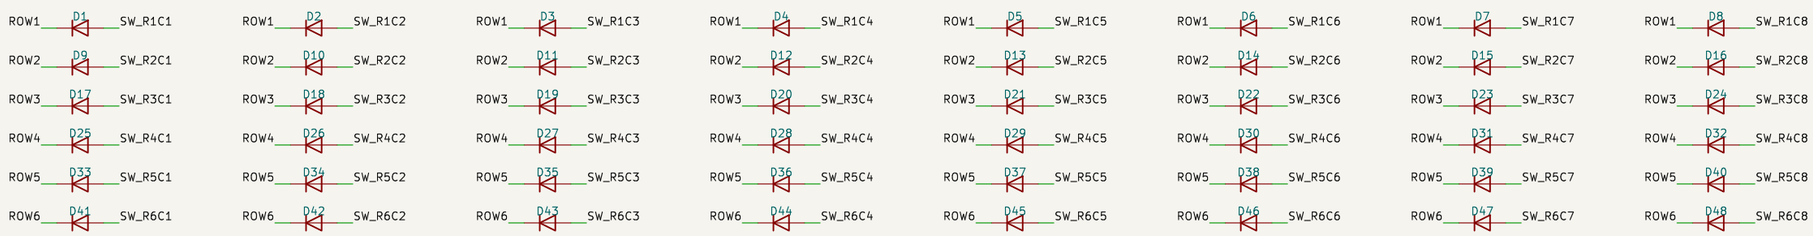









Diodes: one per switch, cathode (stripe) to the row. D1–D48 = switch R1C1 … R6C8, 1N4148W SOD-123.










Switch connector pairs: pin N on A and pin N on B are the two sides of one switch, same order on every pair.


Pair 1 follows the breakout header: each button pin carries the switch that defaults to that button. Pin 1 (U) is GPIO 19 direct.





Firmware: RP2040AdvancedBreakoutBoardUSBPassthroughMatrix
For RP2040 Advanced Breakout Board – USB Passthrough, 20-pin header

Sheet: /
File: keymatrix-adapter.kicad_sch

**Title: GP2040-CE Key Matrix Diode Adapter**

| Size: A3 | Date: | **Rev: 1.2** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 1/1 |