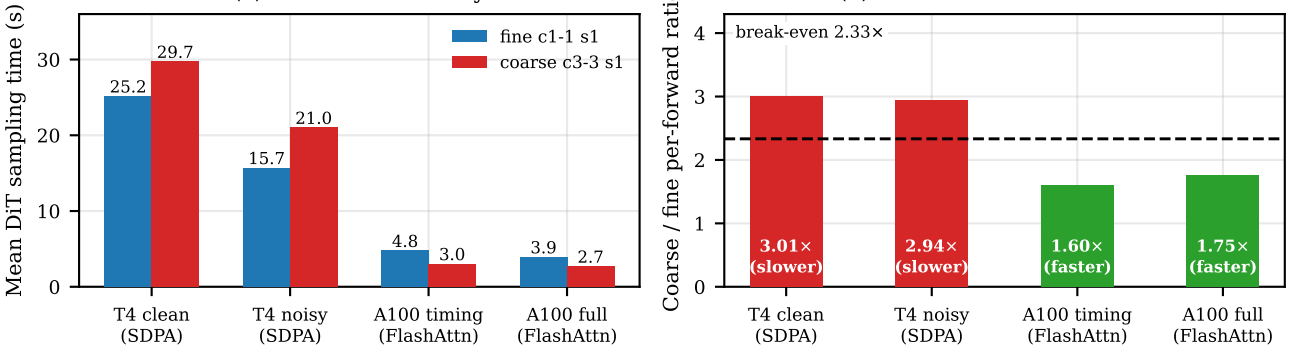
(a) Rollout DiT latency
Mean DiT sampling time (s)
fine c1-1 s1
coarse c3-3 s1
25.2
29.7
15.7
21.0
4.8
3.0
3.9
2.7
T4 clean (SDPA)
T4 noisy (SDPA)
A100 timing (FlashAttn)
A100 full (FlashAttn)
(b) Hardware break-even test
Coarse / fine per-forward ratio
break-even 2.33×
3.01× (slower)
2.94× (slower)
1.60× (faster)
1.75× (faster)