



GM-100

Installation manual

Packing list



PC Case x1



User manual x1



6pcs Screws No.1
(For power supply&side panel)



10pcs Screws No.2
(For mainboard&extension cable)



4pcs Screws No.3
(For 2.5"harddisk)




4pcs Screws No.4
(For 3.5"harddisk)

Specification list


Model	GM-100
Case color	black / white
Material	1.5mm thickness SPCC front panel, other parts 0.8mm thickness, with Mesh
Size	205X232X90MM
Motherboard compatible	ITX
Hardisk support install qty	SSD1+1 or HDDX1+SSDX1
CPU heat dissipation height limit	1, without HDD and HDD bracket, CPU heat height 75mm 2, with single graphics card, CPU heat height 50mm 3, with SSD, CPU heat height 67mm 4, with 20mm thickness HDD, CPU heat height 50mm 5, with 26mm thickness HDD, CPU heat height 47mm
I/O connection line	audio\StandardUSB2.0X2,(OptionalUSB3.0X2)
Power	FELX
PCI expansion slot	1
Graphics card work length limit	180X25MM

Installation Steps

Step 1: Take down top panel and HDD bracket

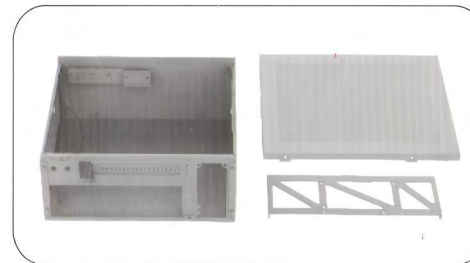

Step 2: Install solid hard disk



Install solid hard disk with screws#3


Step 3: Install power supply with screws#4



Step 4: Install the motherboard with screws#2



Step 5: Install solid hard disk
Install solid hard disk with screws#3

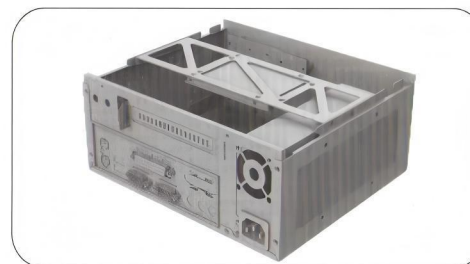

Step 6: Install HDD
Install HDD with screws#4




Step 7: Put back top panel



WIRING INSTRUCTION

POWER LED

POWER SW



Insert the M100 case "power sw" to mainboard "power sw"

Insert the M100 case "power led+" to mainboard "power led positive electrode" as show in the photo

Insert the M100 case "power led-" to mainboard "power led negative electrode" as show in the photo