
Relay monitoring: design as built (19 Oct 2026)

Chat and monitoring cross the same diode, each on its own route (the diode routes by CEF header). Nothing flows from the high side to the low side. Every app is watched from the inside: problems by code, stuck workers, every hop counted.

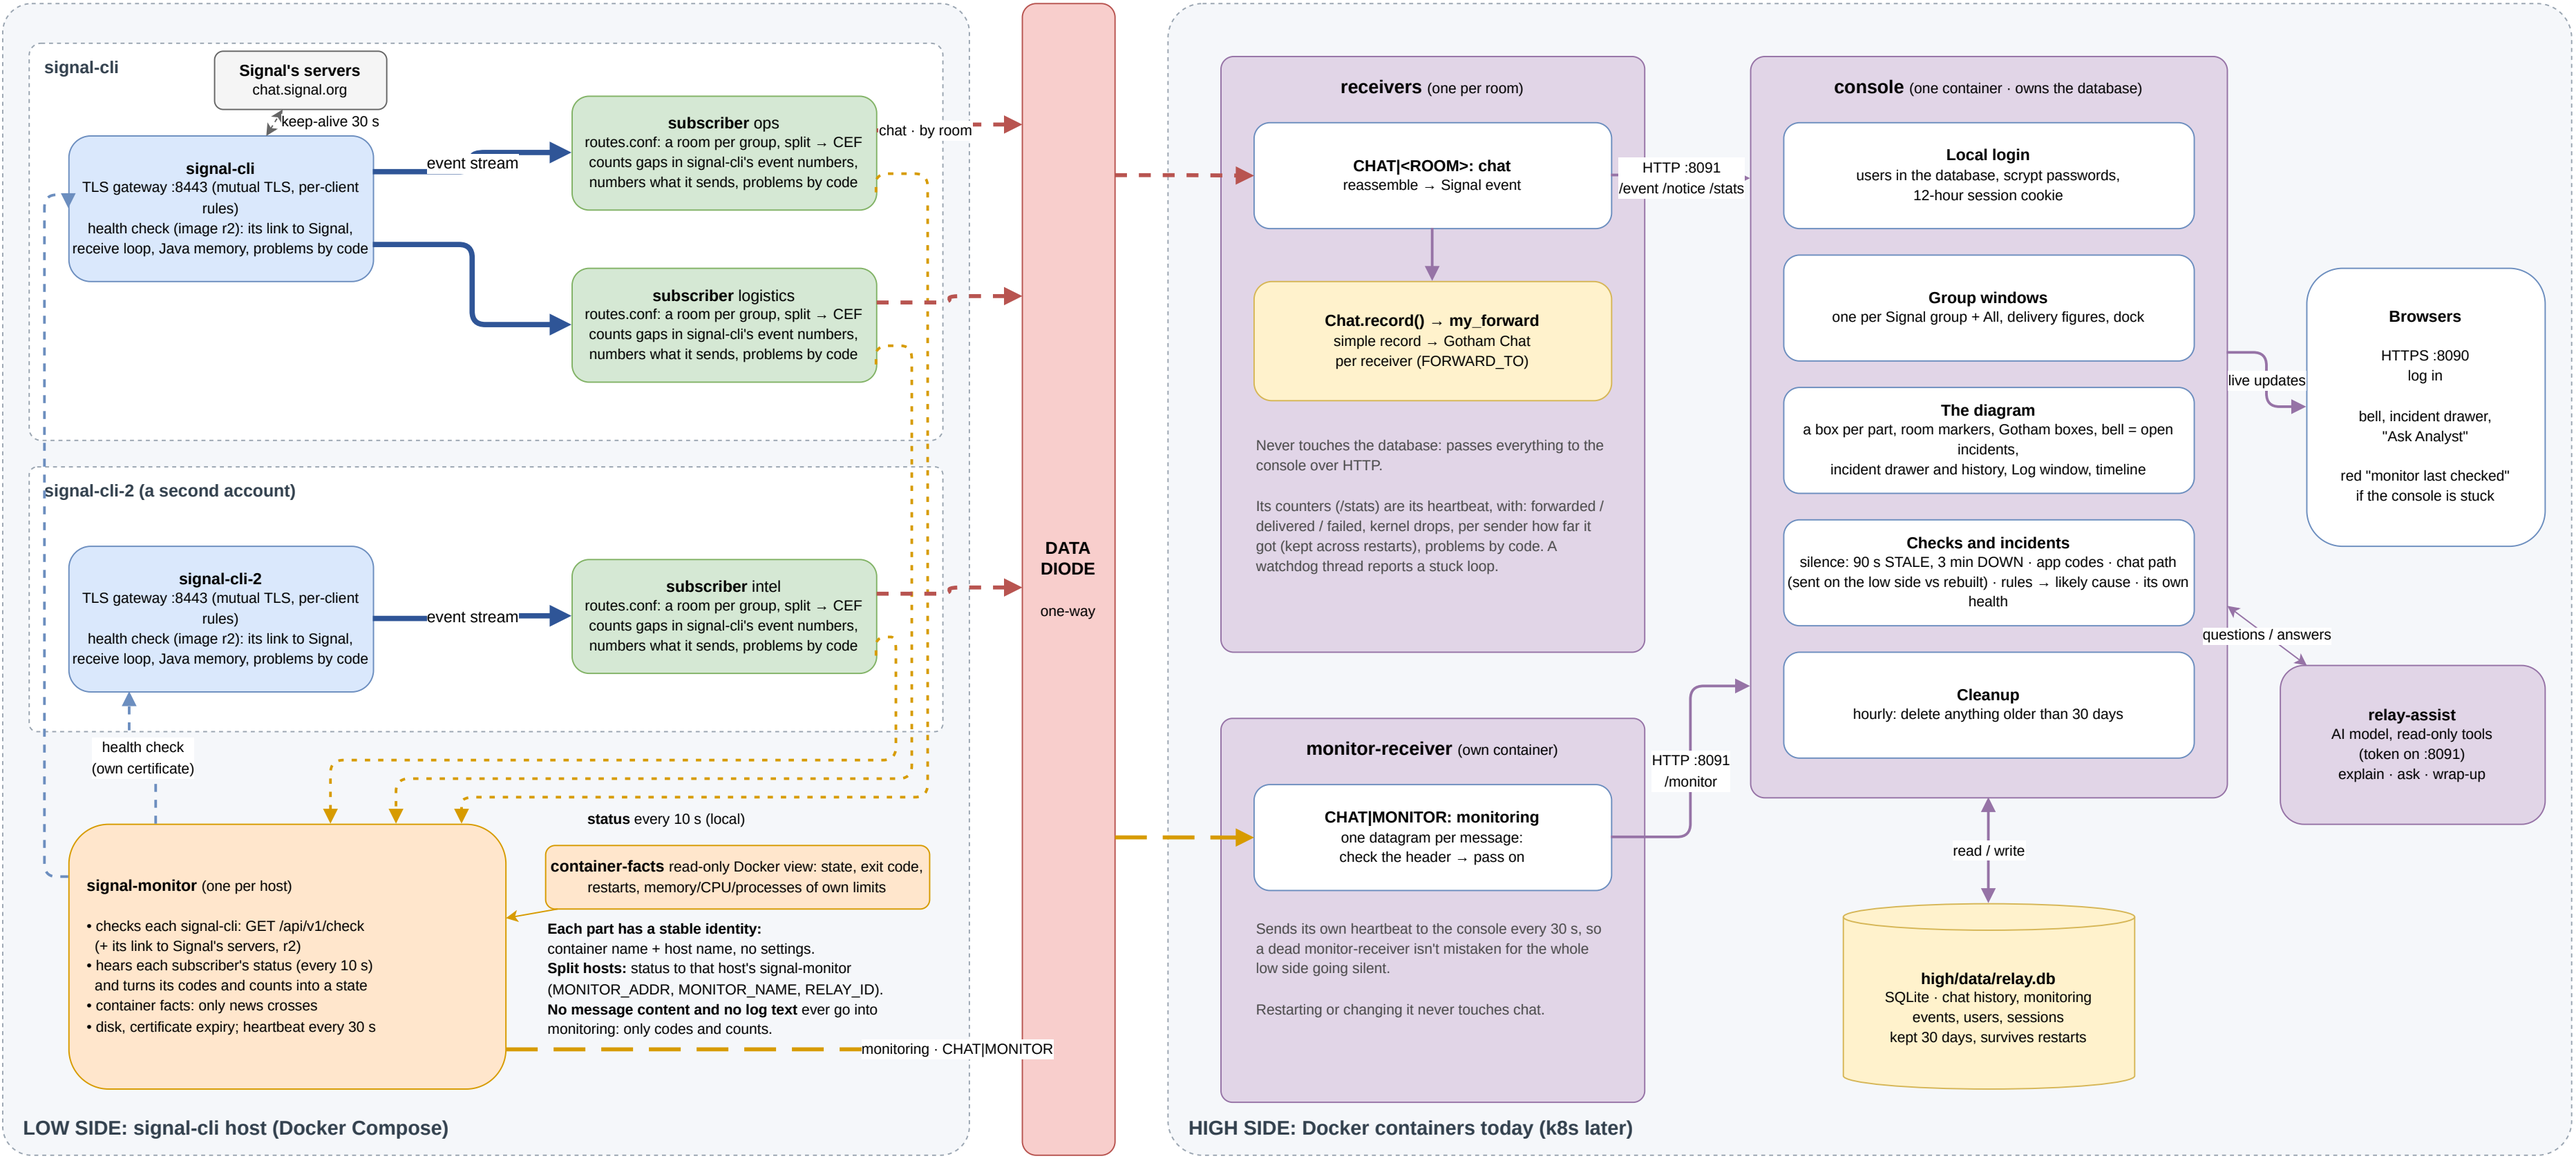

Lines

- event stream, mutual TLS
- chat, CEF over UDP, a route per room
- monitoring, CEF over UDP (CHAT|MONITOR)
- subscriber status (local)
- health check (mutual TLS)
- HTTP inside the high side

Colours: blue signal-cli · green subscriber · orange monitoring · purple high side · yellow data · red diode · grey outside the relay.
Added 18 Oct: per-app problem codes and liveness, hop counting (event IDs, sent vs rebuilt), Signal servers link (image r2), container-facts, relay-assist (AI: explain, ask, wrap-up).