
Relay monitoring: proposed design (for review)

Chat and monitoring cross the same diode on separate UDP ports. Nothing flows from right to left.

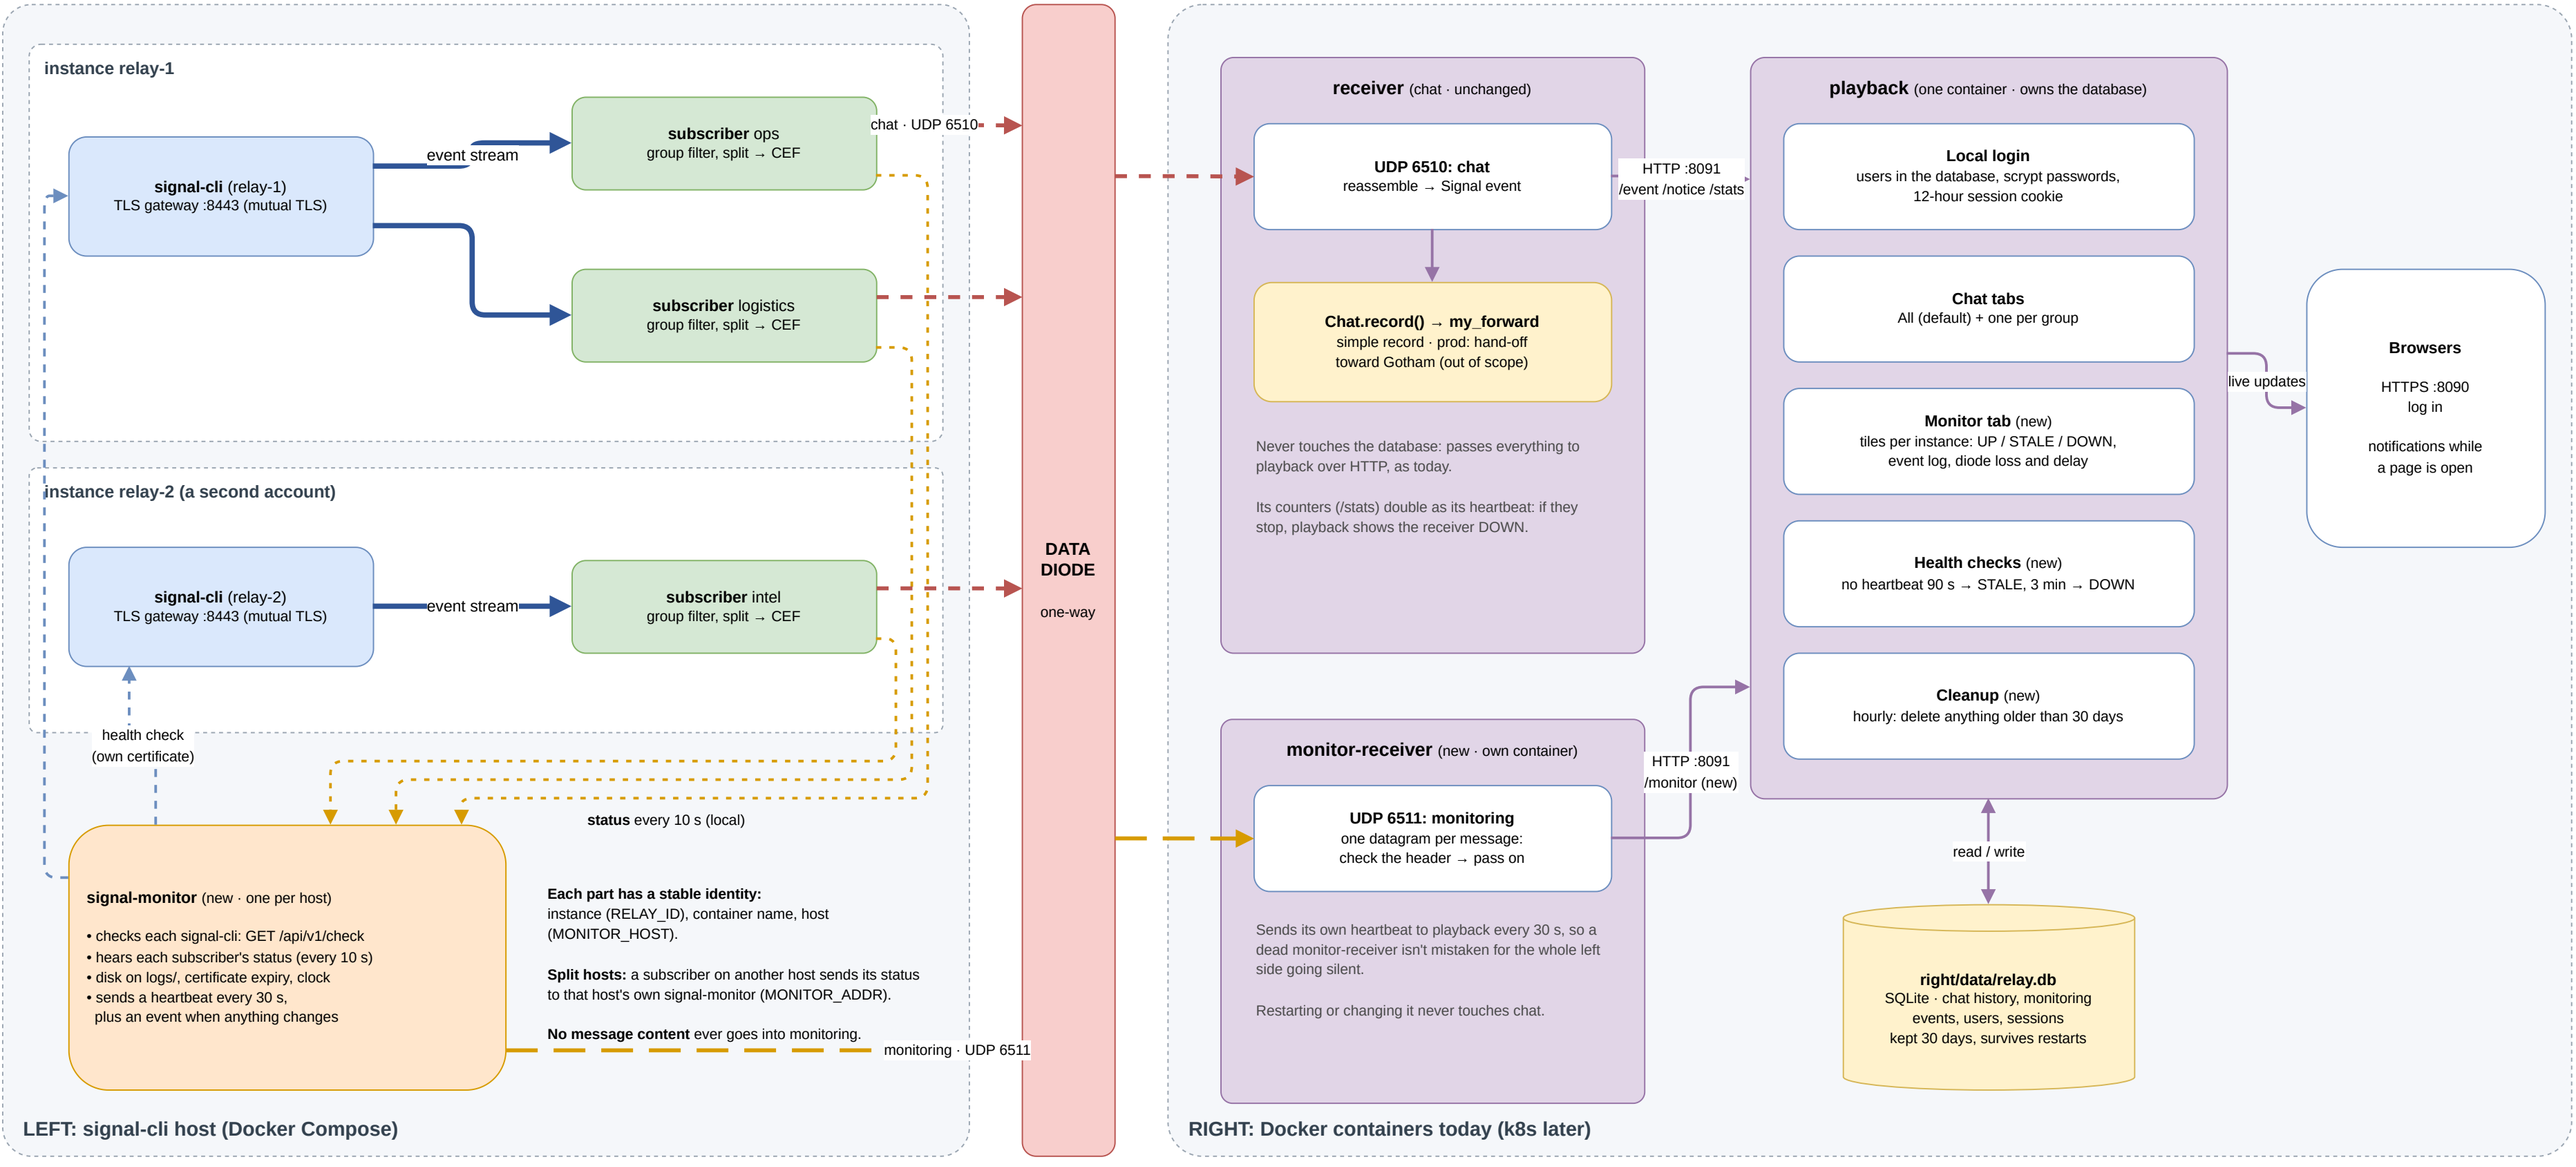

Lines

- event stream, mutual TLS
- chat, CEF over UDP 6510
- monitoring, CEF over UDP 6511
- subscriber status (local)
- health check (mutual TLS)
- HTTP inside the right side

Colours: blue signal-cli · green subscriber · orange monitoring (new) · purple right side · yellow data · red diode.
New in this design: signal-monitor, UDP 6511, the monitor-receiver container, playback's login, Monitor tab, health checks, cleanup and the SQLite database (one admin user to start).