



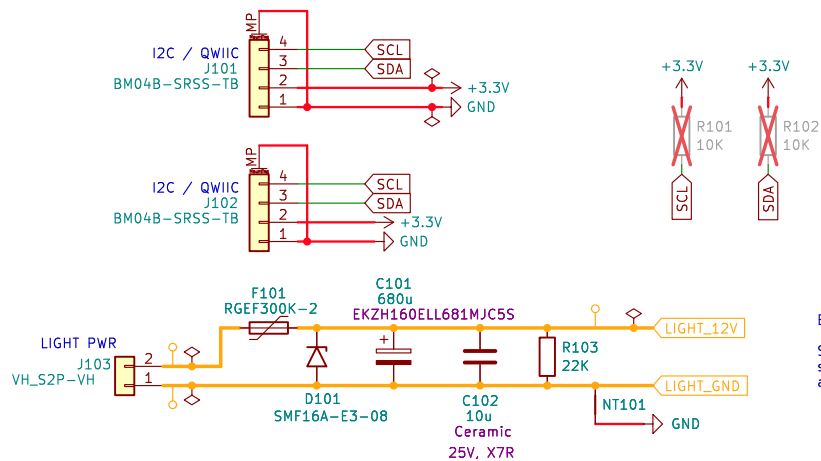

Bulk capacitor sizing:

Switching maximum 3 A at minimum 400 Hz PWM
so $Q_{bulk} = 3 \text{ A} \cdot (1 / 400 \text{ s}) = 0.0075 \text{ C}$
and $C_{bulk} = Q_{bulk} / 12 \text{ V} = 625 \text{ uF}$

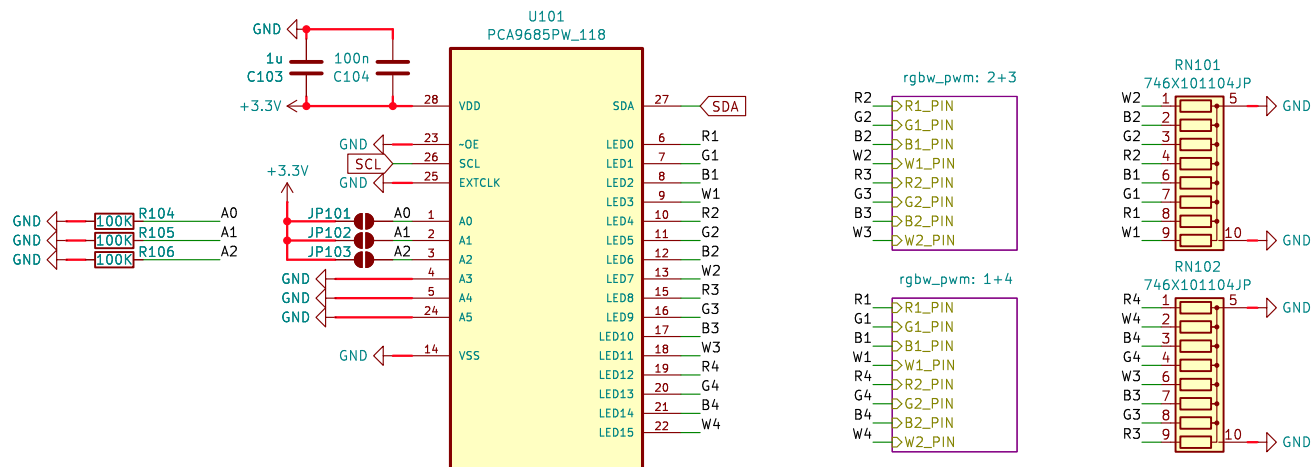

4x4 channel RGB/W LED driver
- Input voltage range: 12 V to 14.5 V
- Output max rating: 3 A, 36 W
- LED PWM frequency: 1000 Hz
- Fixture max power: 0.5 A spots (6 W), 3 A strips (36 W)
- Fixture typical usage: 25% of maximum

Sheet: /

File: led-driver.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 8.0.8

Rev:

Id: 1/3

