


USB SELF-POWERED CONFIGURATION ESP32 PROGRAMMER

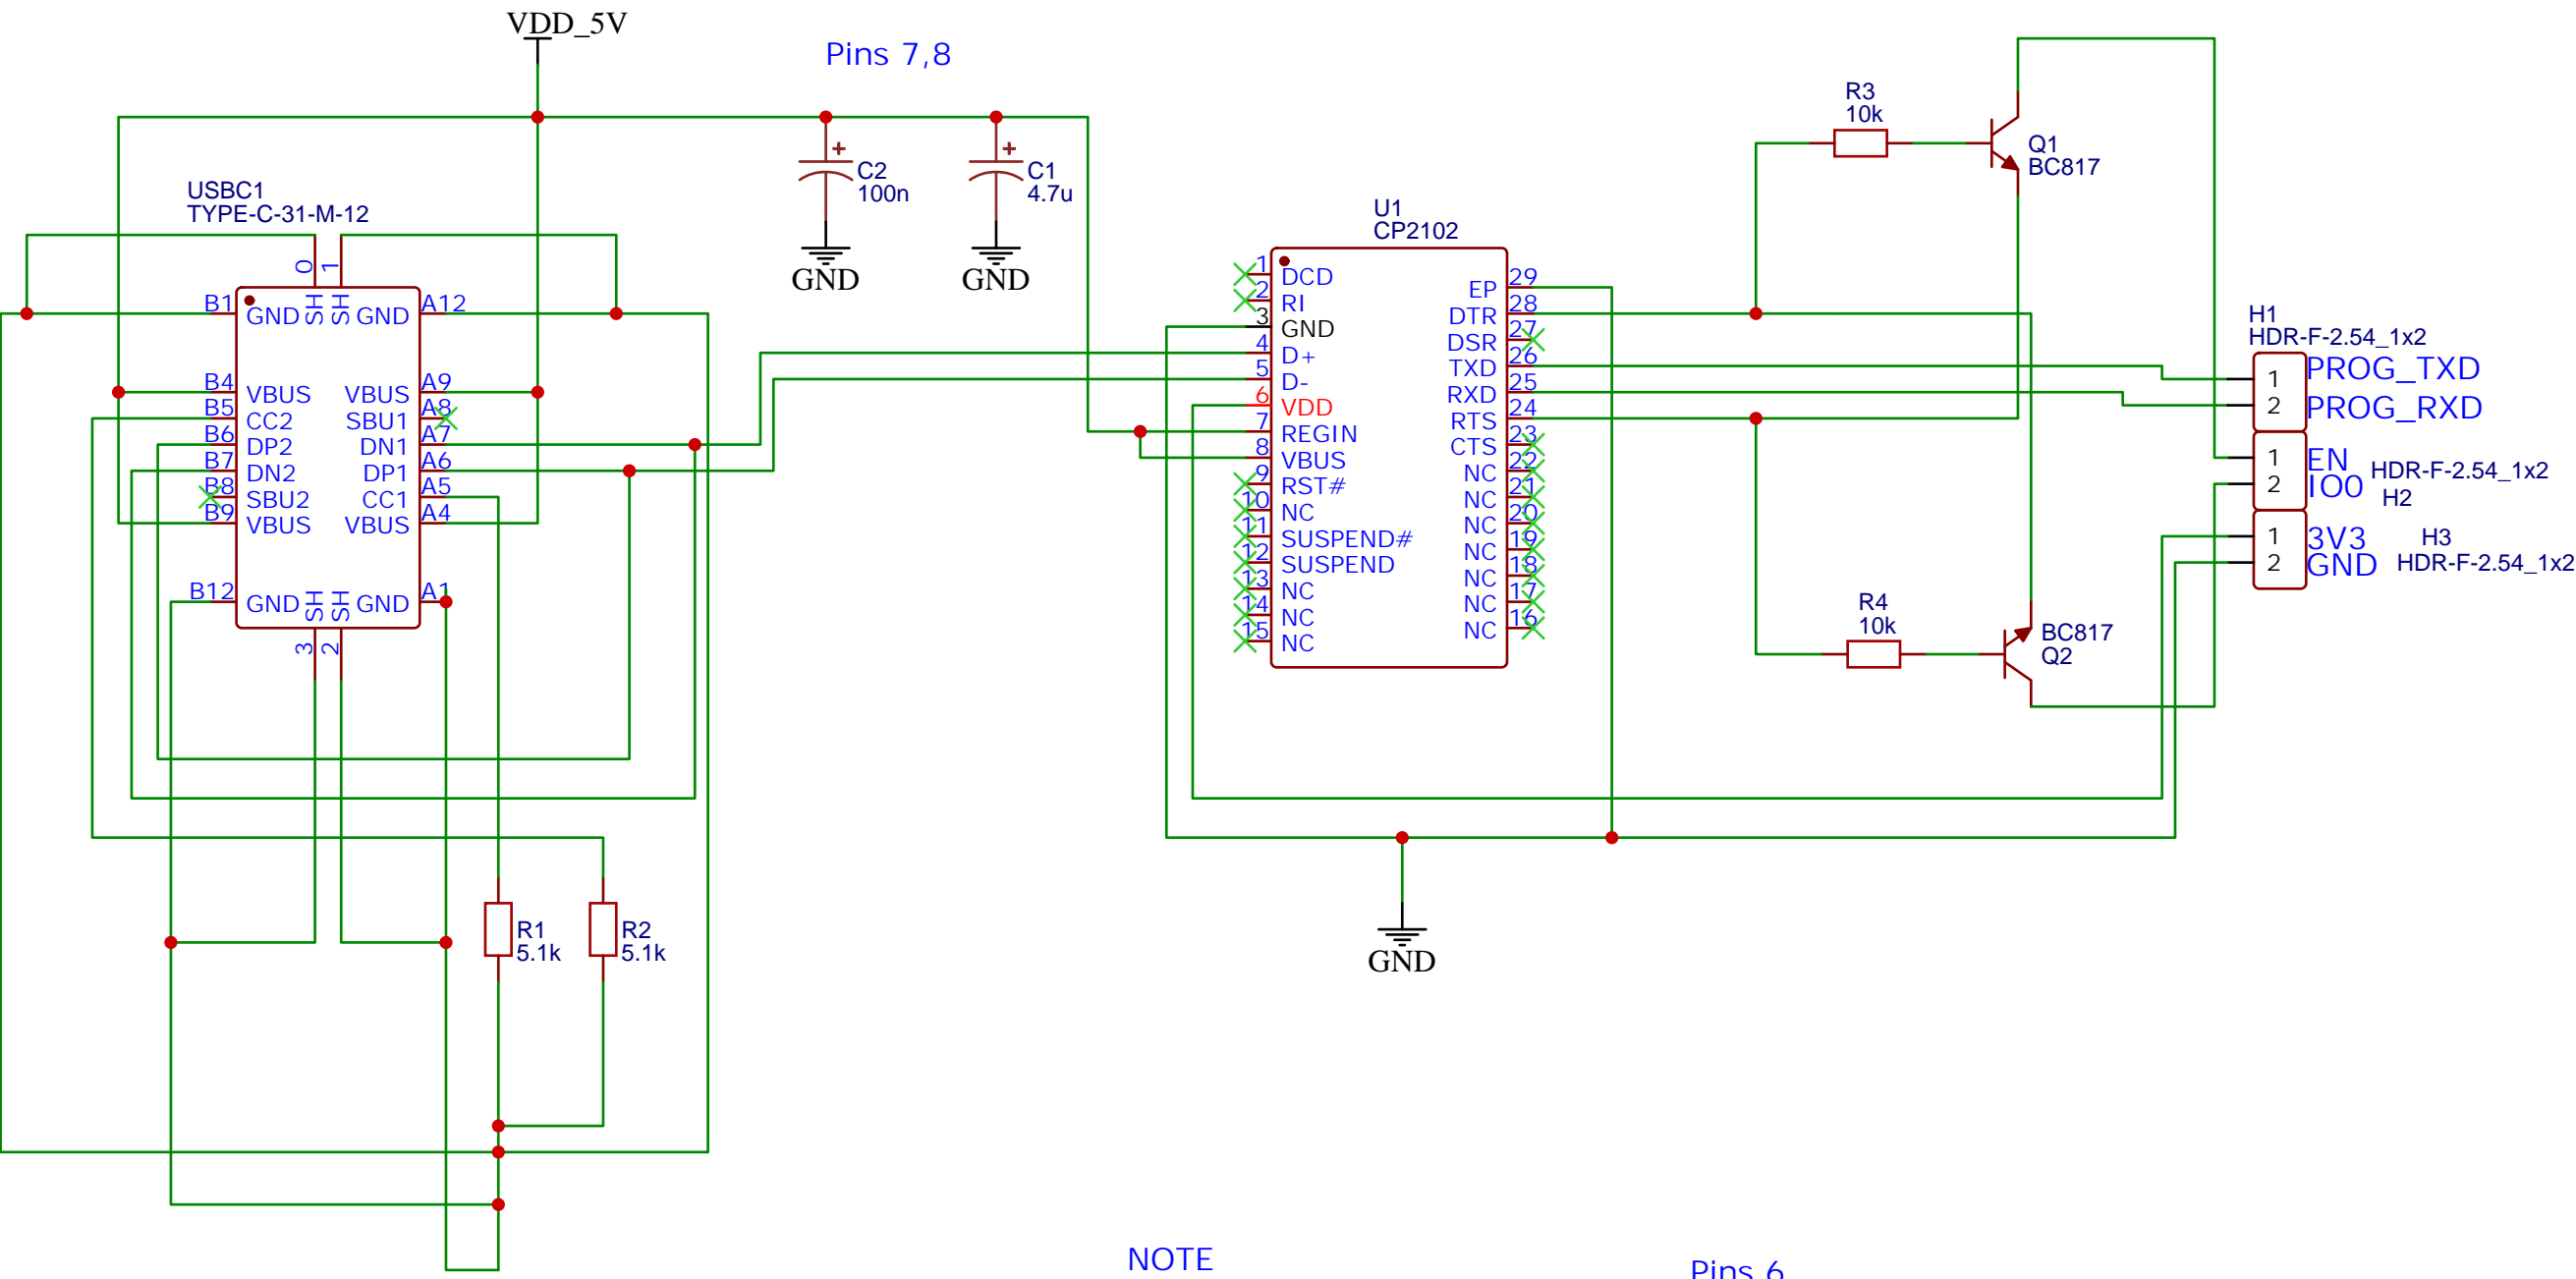


NOTE

USB SELF-POWERED CONFIGURATION = CONNEECT VDD OF CP2102 TO ESP32 3V3 PIN

USB BUS-POWERED CONFIGURATION = CONNEECT VDD OF CP2102 TO GND VIA USING 100nf

USB BUS-POWERED CONFIGURATION

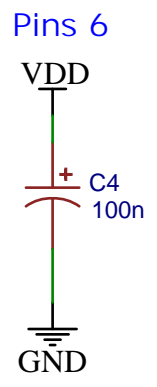

TITLE: USB SELF-POWERED CONFIGURATION ESP32 PROGRAMMER		REV: 1.0
EasyEDA	Company:	Sheet: 1/1
	Date: 2024-11-04 Drawn By: janardhan bv	