



MIPS® Architecture for Programmers

Volume II-B: The microMIPS64™

Instruction Set

Document Number: MD00594
Revision 5.01
December 16, 2012

MIPS Technologies, Inc.
955 East Arques Avenue
Sunnyvale, CA 94085-4521

Copyright © 2008-2012 MIPS Technologies Inc. All rights reserved.



Copyright © 2008-2012 MIPS Technologies, Inc. All rights reserved.

Unpublished rights (if any) reserved under the copyright laws of the United States of America and other countries.

This document contains information that is proprietary to MIPS Technologies, Inc. ("MIPS Technologies"). Any copying, reproducing, modifying or use of this information (in whole or in part) that is not expressly permitted in writing by MIPS Technologies or an authorized third party is strictly prohibited. At a minimum, this information is protected under unfair competition and copyright laws. Violations thereof may result in criminal penalties and fines.

Any document provided in source format (i.e., in a modifiable form such as in FrameMaker or Microsoft Word format) is subject to use and distribution restrictions that are independent of and supplemental to any and all confidentiality restrictions. UNDER NO CIRCUMSTANCES MAY A DOCUMENT PROVIDED IN SOURCE FORMAT BE DISTRIBUTED TO A THIRD PARTY IN SOURCE FORMAT WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIPS TECHNOLOGIES, INC.

MIPS Technologies reserves the right to change the information contained in this document to improve function, design or otherwise. MIPS Technologies does not assume any liability arising out of the application or use of this information, or of any error or omission in such information. Any warranties, whether express, statutory, implied or otherwise, including but not limited to the implied warranties of merchantability or fitness for a particular purpose, are excluded. Except as expressly provided in any written license agreement from MIPS Technologies or an authorized third party, the furnishing of this document does not give recipient any license to any intellectual property rights, including any patent rights, that cover the information in this document.

The information contained in this document shall not be exported, reexported, transferred, or released, directly or indirectly, in violation of the law of any country or international law, regulation, treaty, Executive Order, statute, amendments or supplements thereto. Should a conflict arise regarding the export, reexport, transfer, or release of the information contained in this document, the laws of the United States of America shall be the governing law.

The information contained in this document constitutes one or more of the following: commercial computer software, commercial computer software documentation or other commercial items. If the user of this information, or any related documentation of any kind, including related technical data or manuals, is an agency, department, or other entity of the United States government ("Government"), the use, duplication, reproduction, release, modification, disclosure, or transfer of this information, or any related documentation of any kind, is restricted in accordance with Federal Acquisition Regulation 12.212 for civilian agencies and Defense Federal Acquisition Regulation Supplement 227.7202 for military agencies. The use of this information by the Government is further restricted in accordance with the terms of the license agreement(s) and/or applicable contract terms and conditions covering this information from MIPS Technologies or an authorized third party.

MIPS, MIPS I, MIPS II, MIPS III, MIPS IV, MIPS V, MIPSr3, MIPS32, MIPS64, microMIPS32, microMIPS64, MIPS-3D, MIPS16, MIPS16e, MIPS-Based, MIPSSim, MIPSpro, MIPS-VERIFIED, Aptiv logo, microMIPS logo, MIPS Technologies logo, MIPS-VERIFIED logo, 4K, 4Kc, 4Km, 4Kp, 4KE, 4KEc, 4KEm, 4KEp, 4KS, 4KSc, 4KSd, M4K, M14K, 5K, 5Kc, 5Kf, 24K, 24Kc, 24Kf, 24KE, 24KEc, 24KEf, 34K, 34Kc, 34Kf, 74K, 74Kc, 74Kf, 1004K, 1004Kc, 1004Kf, 1074K, 1074Kc, 1074Kf, R3000, R4000, R5000, Aptiv, ASMACRO, Atlas, "At the core of the user experience.", BusBridge, Bus Navigator, CLAM, CorExtend, CoreFPGA, CoreLV, EC, FPGA View, FS2, FS2 FIRST SILICON SOLUTIONS logo, FS2 NAVIGATOR, HyperDebug, HyperJTAG, IASim, iFlowtrace, interAptiv, JALGO, Logic Navigator, Malta, MDMX, MED, MGB, microAptiv, microMIPS, OCI, PDtrace, the Pipeline, proAptiv, Pro Series, SEAD, SEAD-2, SmartMIPS, SOC-it, System Navigator, and YAMON are trademarks or registered trademarks of MIPS Technologies, Inc. in the United States and other countries. All other trademarks referred to herein are the property of their respective owners.

All other trademarks referred to herein are the property of their respective owners.

Template: nB1.02, Built with tags: 2B ARCH MIPS64

Table of Contents

Chapter 1: About This Book	17
1.1: Typographical Conventions	17
1.1.1: Italic Text.....	18
1.1.2: Bold Text.....	18
1.1.3: Courier Text	18
1.2: UNPREDICTABLE and UNDEFINED	18
1.2.1: UNPREDICTABLE	18
1.2.2: UNDEFINED	19
1.2.3: UNSTABLE	19
1.3: Special Symbols in Pseudocode Notation.....	19
1.4: For More Information	22
Chapter 2: Guide to the Instruction Set	23
2.1: Understanding the Instruction Fields	23
2.1.1: Instruction Fields	25
2.1.2: Instruction Descriptive Name and Mnemonic.....	25
2.1.3: Format Field	25
2.1.4: Purpose Field	26
2.1.5: Description Field	26
2.1.6: Restrictions Field.....	26
2.1.7: Operation Field.....	27
2.1.8: Exceptions Field.....	27
2.1.9: Programming Notes and Implementation Notes Fields.....	28
2.2: Operation Section Notation and Functions	28
2.2.1: Instruction Execution Ordering.....	28
2.2.2: Pseudocode Functions.....	28
2.2.2.1: Coprocessor General Register Access Functions	29
2.2.2.2: Memory Operation Functions	30
2.2.2.3: Floating Point Functions	33
2.2.2.4: Miscellaneous Functions	36
2.3: Op and Function Subfield Notation.....	38
2.4: FPU Instructions	38
Chapter 3: Introduction	40
3.1: Release 3 of the MIPS Architecture	40
3.2: Default ISA Mode	41
3.3: Software Detection	41
3.4: Compliance and Subsetting.....	41
3.5: ISA Mode Switch	42
3.6: Branch and Jump Offsets	42
3.7: Coprocessor Unusable Behavior	43
Chapter 4: Instruction Formats	44
4.1: Instruction Stream Organization and Endianness	47
Chapter 5: microMIPS Re-encoded Instructions	50

5.1: 16-Bit Category.....	51
5.1.1: Frequent MIPS64 Instructions.....	51
5.1.2: Frequent MIPS64 Instruction Sequences	53
5.1.3: Instruction-Specific Register Specifiers and Immeidiate Field Encodings	54
5.2: 16-bit Instruction Register Set	55
5.3: 32-Bit Category.....	58
5.3.1: New 32-bit instructions.....	58
5.4: New Instructions	60
ADDIUPC	61
ADDIUR1SP	62
ADDIUR2	64
ADDIUSP	66
ADDIUS5	68
ADDU16	71
ANDI16.....	72
AND16.....	75
B16	77
BEQZ16.....	79
BEQZC	81
BGEZALS	83
BLTZALS	85
BNEZ16.....	87
BNEZC	89
BREAK16	91
JALR16.....	92
JALRS16	94
JALRS	96
JALRS.HB	98
JALS	100
JALX	101
JR16	103
JRADDIUSP	105
JRC	107
LBU16	109
LDM	111
LDP	113
LHU16	116
LI16	118
LW16	119
LWM32	121
LWM16	123
LWP	125
LWGP	127
LWSP	129
LWX	130
MFHI16.....	131
MFLO16	132
MOVE16	134
MOVEP	136
NOT16.....	138
OR16	140
SB16.....	142
SDBBP16	144

SDM	145
SDP	147
SH16	148
SLL16	149
SRL16	152
SUBU16	155
SW16.....	157
SWSP.....	159
SWM32.....	161
SWM16.....	163
SWP	165
XOR16.....	166
5.5: Recoded 32-Bit Instructions	168
ABS(fmt	170
ADD.....	172
ADD(fmt.....	173
ADDI.....	175
ADDIU	176
ADDU	177
ALNV.PS	178
AND.....	181
ANDI.....	182
B	183
BAL.....	184
BC1F	185
BC1T	187
BC2F	189
BC2T	191
BEQ.....	193
BGEZ.....	194
BGEZAL	195
BGTZ.....	196
BLEZ	197
BLTZ	198
BLTZAL	199
BNE	200
BREAK	201
C.cond(fmt	202
CACHE.....	207
CACHEE	213
CEIL.L(fmt	220
CEIL.W(fmt	222
CFC1	224
CFC2	226
CLO	227
CLZ.....	229
COP2.....	230
CTC1	232
CTC2.....	234
CVT.D(fmt	235
CVT.L(fmt	237
CVT.PSS	239
CVT.S(fmt	241

CVT.S.PL	243
CVT.S.PU	245
CVT.W(fmt)	247
DADD	249
DADDI	250
DADDIU	251
DADDU	252
DCLO	253
DCLZ	254
DDIV	255
DDIVU	256
DERET	257
DEXT	259
DEXTM	261
DEXTU	263
DI	265
DINS	267
DINSM	270
DINSU	273
DIV	276
DIV(fmt)	278
DIVU	279
DMFC0	280
DMFC1	281
DMFC2	282
DMTC0	283
DMTC1	284
DMTC2	285
DMULT	286
DMULTU	288
DROTR	290
DROTR32	292
DROTRV	294
DSBH	295
DSHD	297
DSLL	299
DSLL32	300
DSLLV	301
DSRA	302
DSRA32	303
DSRAV	304
DSRL	305
DSRL32	306
DSRLV	307
DSUB	308
DSUBU	309
EHB	310
EI	312
ERET	314
EXT	316
FLOOR.L(fmt)	318
FLOOR.W(fmt)	320
INS	322

J.....	325
JAL	326
JALR	328
JALR.HB	330
JR	333
JR.HB	335
LB	338
LBE	340
LBU	341
LBUE	343
LD	344
LDC1	345
LDC2	346
LDL	347
LDR	349
LDXC1	351
LH	352
LHE	354
LHU	355
LHUE	357
LL	358
LLD	360
LLE	362
LUI	364
LUXC1	365
LW	366
LWC1	367
LWC2	368
LWE	370
LWL	371
LWLE	373
LWR	376
LWRE	380
LWU	383
LWXC1	385
MADD	386
MADD.fmt	387
MADDU	389
MFC0	390
MFC1	391
MFC2	392
MFHC1	393
MFHC2	394
MFHI	395
MFLO	396
MOV.fmt	397
MOVF	399
MOVF.fmt	400
MOVN	402
MOVN.fmt	403
MOVT	405
MOVT.fmt	406
MOVZ	408

MOVZ(fmt)	409
MSUB	411
MSUB(fmt)	412
MSUBU	414
MTC0	415
MTC1	416
MTC2	417
MTHC1	418
MTHC2	419
MTHI	421
MTLO	422
MUL	423
MUL(fmt)	425
MULT	427
MULTU	429
NEG(fmt)	431
NMADD(fmt)	433
NMSUB(fmt)	435
NOP	437
NOR	438
OR	439
ORI	440
PAUSE	441
PLL.PS	443
PLU.PS	445
PREF	446
PREFE	450
PREFIX	454
PUL.PS	456
PUU.PS	457
RDHWR	458
RDPGPR	461
RECIP(fmt)	462
ROTR	464
ROTRV	465
ROUND.L(fmt)	466
ROUND.W(fmt)	468
RSQRT(fmt)	470
SB	472
SBE	474
SC	475
SCE	479
SCD	483
SD	485
SDBBP	486
SDC1	487
SDC2	488
SDL	490
SDR	492
SDXC1	495
SEB	496
SEH	498
SH	500

SHE	502
SLL	503
SLLV	504
SLT	505
SLTI	506
SLTIU	507
SLTU	508
SQRT.fmt	509
SRA	511
SRAV	512
SRL	513
SRLV	514
SSNOP	515
SUB	516
SUB.fmt	517
SUBU	519
SUXC1	520
SW	521
SWE	523
SWC1	524
SWC2	525
SWL	526
SWLE	528
SWR	530
SWRE	532
SWXC1	534
SYNC	535
SYNCI	541
SYSCALL	544
TEQ	545
TEQI	546
TGE	547
TGEI	548
TGEIU	549
TGEU	550
TLBP	551
TLBR	552
TLBWI	554
TLBWR	556
TLT	558
TLTI	559
TLTIU	560
TLTU	561
TNE	562
TNEI	563
TRUNC.L fmt	564
TRUNC.W fmt	566
WAIT	568
WRPGPR	570
WSBH	571
XOR	573
XORI	574

Chapter 6: Opcode Map	576
6.1: Major Opcodes	576
6.2: Minor Opcodes	578
6.3: Floating Point Unit Instruction Format Encodings	587
Chapter 7: Compatibility	590
7.1: Assembly-Level Compatibility.....	590
7.2: ABI Compatibility	591
7.3: Branch and Jump Offsets	592
7.4: Relocation Types.....	592
7.5: Boot-up Code shared between microMIPS64 and MIPS64	592
7.6: Coprocessor Unusable Behavior	593
7.7: Other Issues Affecting Software and Compatibility	593
Appendix C: References	594
Appendix D: Revision History	596

List of Tables

Table 1.1: Symbols Used in Instruction Operation Statements.....	19
Table 2.1: AccessLength Specifications for Loads/Stores	32
Table 4.1: microMIPS Opcode Formats.....	47
Table 5.1: 16-Bit Re-encoding of Frequent MIPS64 Instructions.....	51
Table 5.2: 16-Bit Re-encoding of Frequent MIPS64 Instruction Sequences.....	53
Table 5.3: Instruction-Specific Register Specifiers and Immediate Field Values.....	54
Table 5.4: 16-Bit Instruction General-Purpose Registers - \$2-\$7, \$16, \$17	56
Table 5.5: SB16, SH16, SW16 Source Registers - \$0, \$2-\$7, \$17.....	57
Table 5.6: 16-Bit Instruction Implicit General-Purpose Registers	58
Table 5.7: 16-Bit Instruction Special-Purpose Registers.....	58
Table 5.8: 32-bit Instructions introduced within microMIPS	58
Table 5.9: Encoded and Decoded Values of the Immediate Field.....	64
Table 5.10: Encoded and Decoded Values of Immediate Field	66
Table 5-1: Encoded and Decoded Values of Signed Immediate Field.....	68
Table 5-2: Encoded and Decoded Values of Immediate Field.....	72
Table 5.11: Offset Field Encoding Range -1, 0..14	109
Table 5.12: LI16 -1, 0..126 Immediate Field Encoding Range.....	118
Table 5.13: Encoded and Decoded Values of the Enc_Dest Field	136
Table 5.14: Encoded and Decoded Values of the Enc_rs and Enc_rt Fields	137
Table 5.15: Shift Amount Field Encoding.....	149
Table 5.16: Shift Amount Field Encoding.....	152
Table 5.17: FPU Comparisons Without Special Operand Exceptions	203
Table 5.18: FPU Comparisons With Special Operand Exceptions for QNaNs	204
Table 5.19: Usage of Effective Address.....	207
Table 5.20: Encoding of Bits[17:16] of CACHE Instruction	208
Table 5.21: Encoding of Bits [20:18] of the CACHE Instruction	209
Table 5.22: Usage of Effective Address.....	213
Table 5.23: Encoding of Bits[22:21] of CACHEE Instruction.....	214
Table 5.24: Encoding of Bits [20:18] of the CACHEE Instruction.....	215
Table 5.25: Values of <i>hint</i> Field for PREF Instruction	446
Table 5.26: Values of <i>hint</i> Field for PREFE Instruction.....	451
Table 5.27: RDHWR Register Numbers	458
Table 5.28: Encodings of the Bits[10:6] of the SYNC instruction; the SType Field.....	537
Table 6.1: Symbols Used in the Instruction Encoding Tables.....	577
Table 6.2: microMIPS64 Encoding of Major Opcode Field	578
Table 6.3: Legend for Minor Opcode Tables	579
Table 6.4: POOL32A Encoding of Minor Opcode Field	579
Table 6.5: POOL32Ax _f Encoding of Minor Opcode Extension Field	580
Table 6.6: POOL32F Encoding of Minor Opcode Field.....	581
Table 6.7: POOL32Fx _f Encoding of Minor Opcode Extension Field	582
Table 6.8: POOL32B Encoding of Minor Opcode Field	582
Table 6.9: POOL32C Encoding of Minor Opcode Field	583
Table 6.10: LD-EVA Encoding of Minor Opcode Field.....	583
Table 6.11: ST-EVA Encoding of Minor Opcode Field.....	583
Table 6.12: POOL32I Encoding of Minor Opcode Field	584
Table 6.13: POOL32S Encoding of Minor Opcode Field	584
Table 6.14: POOL32Sx _f Encoding of Minor Opcode Extension Field.....	585

Table 6.15: POOL16A Encoding of Minor Opcode Field	586
Table 6.16: POOL16B Encoding of Minor Opcode Field	586
Table 6.17: POOL16C Encoding of Minor Opcode Field	586
Table 6.18: POOL16D Encoding of Minor Opcode Field	587
Table 6.19: POOL16E Encoding of Minor Opcode Field	587
Table 6.20: POOL16F Encoding of Minor Opcode Field.....	587
Table 6.21: Floating Point Unit Format Encodings - S, D, PS.....	588
Table 6.22: Floating Point Unit Format Encodings - S, D 1-bit	588
Table 6.23: Floating Point Unit Instruction Format Encodings - S, D 2-bits.....	588
Table 6.24: Floating Point Unit Format Encodings - S, W, L.....	589
Table 6.25: Floating Point Unit Format Encodings - D, W, L	589

List of Figures

Figure 2.1: Example of Instruction Description	24
Figure 2.2: Example of Instruction Fields.....	25
Figure 2.3: Example of Instruction Descriptive Name and Mnemonic	25
Figure 2.4: Example of Instruction Format.....	25
Figure 2.5: Example of Instruction Purpose	26
Figure 2.6: Example of Instruction Description	26
Figure 2.7: Example of Instruction Restrictions.....	27
Figure 2.8: Example of Instruction Operation.....	27
Figure 2.9: Example of Instruction Exception.....	28
Figure 2.10: Example of Instruction Programming Notes	28
Figure 2.11: COP_LW Pseudocode Function	29
Figure 2.12: COP_LD Pseudocode Function.....	29
Figure 2.13: COP_SW Pseudocode Function	29
Figure 2.14: COP_SD Pseudocode Function	30
Figure 2.15: CoprocessorOperation Pseudocode Function	30
Figure 2.16: AddressTranslation Pseudocode Function	31
Figure 2.17: LoadMemory Pseudocode Function	31
Figure 2.18: StoreMemory Pseudocode Function.....	32
Figure 2.19: Prefetch Pseudocode Function.....	32
Figure 2.20: SyncOperation Pseudocode Function	33
Figure 2.21: ValueFPR Pseudocode Function.....	33
Figure 2.22: StoreFPR Pseudocode Function	34
Figure 2.23: CheckFPEexception Pseudocode Function	35
Figure 2.24: FPCConditionCode Pseudocode Function	35
Figure 2.25: SetFPCConditionCode Pseudocode Function	36
Figure 2.26: SignalException Pseudocode Function	36
Figure 2.27: SignalDebugBreakpointException Pseudocode Function.....	36
Figure 2.28: SignalDebugModeBreakpointException Pseudocode Function.....	37
Figure 2.29: NullifyCurrentInstruction PseudoCode Function	37
Figure 2.30: JumpDelaySlot Pseudocode Function	37
Figure 2.31: NotWordValue Pseudocode Function.....	37
Figure 2.32: PolyMult Pseudocode Function	38
Figure 4.1: 16-Bit Instruction Formats.....	45
Figure 4.2: 32-Bit Instruction Formats	46
Figure 4.3: Immediate Fields within 32-Bit Instructions.....	46
Figure 5.1: Example of an ALNV.PS Operation.....	178
Figure 5.2: Usage of Address Fields to Select Index and Way.....	207
Figure 5.3: Usage of Address Fields to Select Index and Way.....	213
Figure 5.4: Operation of the DEXT Instruction.....	259
Figure 5.5: Operation of the DEXTM Instruction	261
Figure 5.6: Operation of the DEXTU Instruction	263
Figure 5.7: Operation of the DINS Instruction	267
Figure 5.8: Operation of the DINSM Instruction	270
Figure 5.9: Operation of the DINSU Instruction	273
Figure 5.10: Operation of the EXT Instruction	316
Figure 5.11: Operation of the INS Instruction	322
Figure 5.12: Unaligned Doubleword Load Using LDL and LDR.....	347

Figure 5.13: Bytes Loaded by LDL Instruction	348
Figure 5.14: Unaligned Doubleword Load Using LDR and LDL.....	349
Figure 5.15: Bytes Loaded by LDR Instruction	350
Figure 5.16: Unaligned Word Load Using LWL and LWR.....	371
Figure 5.17: Bytes Loaded by LWL Instruction	372
Figure 5.18: Unaligned Word Load Using LWLE and LWRE.....	373
Figure 5.19: Bytes Loaded by LWLE Instruction.....	374
Figure 5.20: Unaligned Word Load Using LWL and LWR.....	376
Figure 5.21: Bytes Loaded by LWR Instruction.....	377
Figure 5.22: Unaligned Word Load Using LWLE and LWRE.....	380
Figure 5.23: Bytes Loaded by LWRE Instruction	381
Figure 5.24: Unaligned Doubleword Store With SDL and SDR	490
Figure 5.25: Bytes Stored by an SDL Instruction.....	491
Figure 5.26: Unaligned Doubleword Store With SDR and SDL	492
Figure 5.27: Bytes Stored by an SDR Instruction	493
Figure 5.28: Unaligned Word Store Using SWL and SWR	526
Figure 5.29: Bytes Stored by an SWL Instruction	527
Figure 5.30: Unaligned Word Store Using SWLE and SWRE	528
Figure 5.31: Bytes Stored by an SWLE Instruction.....	529
Figure 5.32: Unaligned Word Store Using SWR and SWL	530
Figure 5.33: Bytes Stored by SWR Instruction.....	531
Figure 5.34: Unaligned Word Store Using SWRE and SWLE	532
Figure 5.35: Bytes Stored by SWRE Instruction	533
Figure 6.1: Sample Bit Encoding Table	576

About This Book

The MIPS® Architecture for Programmers Volume II-B: The microMIPS64™ Instruction Set comes as part of a multi-volume set.

- Volume I-A describes conventions used throughout the document set, and provides an introduction to the MIPS64® Architecture
- Volume I-B describes conventions used throughout the document set, and provides an introduction to the microMIPS64™ Architecture
- Volume II-A provides detailed descriptions of each instruction in the MIPS64® instruction set
- Volume II-B provides detailed descriptions of each instruction in the microMIPS64™ instruction set
- Volume III describes the MIPS64® and microMIPS64™ Privileged Resource Architecture which defines and governs the behavior of the privileged resources included in a MIPS® processor implementation
- Volume IV-a describes the MIPS16e™ Application-Specific Extension to the MIPS64® Architecture. Beginning with Release 3 of the Architecture, microMIPS is the preferred solution for smaller code size.
- Volume IV-b describes the MDMX™ Application-Specific Extension to the MIPS64® Architecture and microMIPS64™. With Release 5 of the Architecture, MDMX is deprecated. MDMX and MSA can not be implemented at the same time.
- Volume IV-c describes the MIPS-3D® Application-Specific Extension to the MIPS® Architecture
- Volume IV-d describes the SmartMIPS® Application-Specific Extension to the MIPS32® Architecture and the microMIPS32™ Architecture and is not applicable to the MIPS64® document set nor the microMIPS64™ document set.
- Volume IV-e describes the MIPS® DSP Module to the MIPS® Architecture
- Volume IV-f describes the MIPS® MT Module to the MIPS® Architecture
- Volume IV-h describes the MIPS® MCU Application-Specific Extension to the MIPS® Architecture
- Volume IV-i describes the MIPS® Virtualization Module to the MIPS® Architecture
- Volume IV-j describes the MIPS® SIMD Architecture Module to the MIPS® Architecture

1.1 Typographical Conventions

This section describes the use of *italic*, **bold** and `courier` fonts in this book.

1.1.1 Italic Text

- is used for *emphasis*
- is used for *bits*, *fields*, *registers*, that are important from a software perspective (for instance, address bits used by software, and programmable fields and registers), and various *floating point instruction formats*, such as *S*, *D*, and *PS*
- is used for the memory access types, such as *cached* and *uncached*

1.1.2 Bold Text

- represents a term that is being **defined**
- is used for **bits** and **fields** that are important from a hardware perspective (for instance, **register** bits, which are not programmable but accessible only to hardware)
- is used for ranges of numbers; the range is indicated by an ellipsis. For instance, **5..1** indicates numbers 5 through 1
- is used to emphasize **UNPREDICTABLE** and **UNDEFINED** behavior, as defined below.

1.1.3 Courier Text

Courier fixed-width font is used for text that is displayed on the screen, and for examples of code and instruction pseudocode.

1.2 UNPREDICTABLE and UNDEFINED

The terms **UNPREDICTABLE** and **UNDEFINED** are used throughout this book to describe the behavior of the processor in certain cases. **UNDEFINED** behavior or operations can occur only as the result of executing instructions in a privileged mode (i.e., in Kernel Mode or Debug Mode, or with the CP0 usable bit set in the Status register). Unprivileged software can never cause **UNDEFINED** behavior or operations. Conversely, both privileged and unprivileged software can cause **UNPREDICTABLE** results or operations.

1.2.1 UNPREDICTABLE

UNPREDICTABLE results may vary from processor implementation to implementation, instruction to instruction, or as a function of time on the same implementation or instruction. Software can never depend on results that are **UNPREDICTABLE**. **UNPREDICTABLE** operations may cause a result to be generated or not. If a result is generated, it is **UNPREDICTABLE**. **UNPREDICTABLE** operations may cause arbitrary exceptions.

UNPREDICTABLE results or operations have several implementation restrictions:

- Implementations of operations generating **UNPREDICTABLE** results must not depend on any data source (memory or internal state) which is inaccessible in the current processor mode
- **UNPREDICTABLE** operations must not read, write, or modify the contents of memory or internal state which is inaccessible in the current processor mode. For example, **UNPREDICTABLE** operations executed in user mode must not access memory or internal state that is only accessible in Kernel Mode or Debug Mode or in another process

- **UNPREDICTABLE** operations must not halt or hang the processor

1.2.2 UNDEFINED

UNDEFINED operations or behavior may vary from processor implementation to implementation, instruction to instruction, or as a function of time on the same implementation or instruction. **UNDEFINED** operations or behavior may vary from nothing to creating an environment in which execution can no longer continue. **UNDEFINED** operations or behavior may cause data loss.

UNDEFINED operations or behavior has one implementation restriction:

- **UNDEFINED** operations or behavior must not cause the processor to hang (that is, enter a state from which there is no exit other than powering down the processor). The assertion of any of the reset signals must restore the processor to an operational state

1.2.3 UNSTABLE

UNSTABLE results or values may vary as a function of time on the same implementation or instruction. Unlike **UNPREDICTABLE** values, software may depend on the fact that a sampling of an **UNSTABLE** value results in a legal transient value that was correct at some point in time prior to the sampling.

UNSTABLE values have one implementation restriction:

- Implementations of operations generating **UNSTABLE** results must not depend on any data source (memory or internal state) which is inaccessible in the current processor mode

1.3 Special Symbols in Pseudocode Notation

In this book, algorithmic descriptions of an operation are described as pseudocode in a high-level language notation resembling Pascal. Special symbols used in the pseudocode notation are listed in [Table 1.1](#).

Table 1.1 Symbols Used in Instruction Operation Statements

Symbol	Meaning
\leftarrow	Assignment
$=, \neq$	Tests for equality and inequality
\parallel	Bit string concatenation
x^y	A y -bit string formed by y copies of the single-bit value x
$b\#n$	A constant value n in base b . For instance 10#100 represents the decimal value 100, 2#100 represents the binary value 100 (decimal 4), and 16#100 represents the hexadecimal value 100 (decimal 256). If the "b#" prefix is omitted, the default base is 10.
0bn	A constant value n in base 2. For instance 0b100 represents the binary value 100 (decimal 4).
0xn	A constant value n in base 16. For instance 0x100 represents the hexadecimal value 100 (decimal 256).
$x_{y..z}$	Selection of bits y through z of bit string x . Little-endian bit notation (rightmost bit is 0) is used. If y is less than z , this expression is an empty (zero length) bit string.
$+, -$	2's complement or floating point arithmetic: addition, subtraction

About This Book

Table 1.1 Symbols Used in Instruction Operation Statements (Continued)

Symbol	Meaning
\ast, \times	2's complement or floating point multiplication (both used for either)
div	2's complement integer division
mod	2's complement modulo
/	Floating point division
<	2's complement less-than comparison
>	2's complement greater-than comparison
\leq	2's complement less-than or equal comparison
\geq	2's complement greater-than or equal comparison
nor	Bitwise logical NOR
xor	Bitwise logical XOR
and	Bitwise logical AND
or	Bitwise logical OR
not	Bitwise inversion
$\&\&$	Logical (non-Bitwise) AND
\ll	Logical Shift left (shift in zeros at right-hand-side)
\gg	Logical Shift right (shift in zeros at left-hand-side)
GPRLEN	The length in bits (32 or 64) of the CPU general-purpose registers
<i>GPR[x]</i>	CPU general-purpose register <i>x</i> . The content of <i>GPR[0]</i> is always zero. In Release 2 of the Architecture, <i>GPR[x]</i> is a short-hand notation for <i>SGPR[SRScf/CSS, x]</i> .
<i>SGPR[s,x]</i>	In Release 2 of the Architecture and subsequent releases, multiple copies of the CPU general-purpose registers may be implemented. <i>SGPR[s,x]</i> refers to GPR set <i>s</i> , register <i>x</i> .
<i>FPR[x]</i>	Floating Point operand register <i>x</i>
<i>FCC/CCJ</i>	Floating Point condition code CC. <i>FCC[0]</i> has the same value as <i>COC[1]</i> .
<i>FPR[x]</i>	Floating Point (Coprocessor unit 1), general register <i>x</i>
<i>CPR[z,x,s]</i>	Coprocessor unit <i>z</i> , general register <i>x</i> , select <i>s</i>
<i>CP2CPR[x]</i>	Coprocessor unit 2, general register <i>x</i>
<i>CCR[z,x]</i>	Coprocessor unit <i>z</i> , control register <i>x</i>
<i>CP2CCR[x]</i>	Coprocessor unit 2, control register <i>x</i>
<i>COC[z]</i>	Coprocessor unit <i>z</i> condition signal
<i>Xlat[x]</i>	Translation of the MIPS16e GPR number <i>x</i> into the corresponding 32-bit GPR number
BigEndianMem	Endian mode as configured at chip reset (0 → Little-Endian, 1 → Big-Endian). Specifies the endianness of the memory interface (see LoadMemory and StoreMemory pseudocode function descriptions), and the endianness of Kernel and Supervisor mode execution.
BigEndianCPU	The endianness for load and store instructions (0 → Little-Endian, 1 → Big-Endian). In User mode, this endianness may be switched by setting the <i>RE</i> bit in the <i>Status</i> register. Thus, BigEndianCPU may be computed as (BigEndianMem XOR ReverseEndian).
ReverseEndian	Signal to reverse the endianness of load and store instructions. This feature is available in User mode only, and is implemented by setting the <i>RE</i> bit of the <i>Status</i> register. Thus, ReverseEndian may be computed as (<i>SR_{RE}</i> and User mode).

Table 1.1 Symbols Used in Instruction Operation Statements (Continued)

Symbol	Meaning						
<i>LLbit</i>	Bit of virtual state used to specify operation for instructions that provide atomic read-modify-write. <i>LLbit</i> is set when a linked load occurs and is tested by the conditional store. It is cleared, during other CPU operation, when a store to the location would no longer be atomic. In particular, it is cleared by exception return instructions.						
I: , I+n: , I-n:	This occurs as a prefix to <i>Operation</i> description lines and functions as a label. It indicates the instruction time during which the pseudocode appears to “execute.” Unless otherwise indicated, all effects of the current instruction appear to occur during the instruction time of the current instruction. No label is equivalent to a time label of I . Sometimes effects of an instruction appear to occur either earlier or later — that is, during the instruction time of another instruction. When this happens, the instruction operation is written in sections labeled with the instruction time, relative to the current instruction I , in which the effect of that pseudocode appears to occur. For example, an instruction may have a result that is not available until after the next instruction. Such an instruction has the portion of the instruction operation description that writes the result register in a section labeled I+1 . The effect of pseudocode statements for the current instruction labelled I+1 appears to occur “at the same time” as the effect of pseudocode statements labeled I for the following instruction. Within one pseudocode sequence, the effects of the statements take place in order. However, between sequences of statements for different instructions that occur “at the same time,” there is no defined order. Programs must not depend on a particular order of evaluation between such sections.						
PC	The <i>Program Counter</i> value. During the instruction time of an instruction, this is the address of the instruction word. The address of the instruction that occurs during the next instruction time is determined by assigning a value to PC during an instruction time. If no value is assigned to PC during an instruction time by any pseudocode statement, it is automatically incremented by either 2 (in the case of a 16-bit MIPS16e instruction) or 4 before the next instruction time. A taken branch assigns the target address to the PC during the instruction time of the instruction in the branch delay slot. In the MIPS Architecture, the PC value is only visible indirectly, such as when the processor stores the restart address into a GPR on a jump-and-link or branch-and-link instruction, or into a Coprocessor 0 register on an exception. The PC value contains a full 64-bit address all of which are significant during a memory reference.						
ISA Mode	In processors that implement the MIPS16e Application Specific Extension or the microMIPS base architectures, the <i>ISA Mode</i> is a single-bit register that determines in which mode the processor is executing, as follows: <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Encoding</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The processor is executing 32-bit MIPS instructions</td> </tr> <tr> <td>1</td> <td>The processor is executing MIIPS16e or microMIPS instructions</td> </tr> </tbody> </table> In the MIPS Architecture, the ISA Mode value is only visible indirectly, such as when the processor stores a combined value of the upper bits of PC and the ISA Mode into a GPR on a jump-and-link or branch-and-link instruction, or into a Coprocessor 0 register on an exception.	Encoding	Meaning	0	The processor is executing 32-bit MIPS instructions	1	The processor is executing MIIPS16e or microMIPS instructions
Encoding	Meaning						
0	The processor is executing 32-bit MIPS instructions						
1	The processor is executing MIIPS16e or microMIPS instructions						
PABITS	The number of physical address bits implemented is represented by the symbol PABITS. As such, if 36 physical address bits were implemented, the size of the physical address space would be $2^{\text{PABITS}} = 2^{36}$ bytes.						
SEGBITS	The number of virtual address bits implemented in a segment of the address space is represented by the symbol SEGBITS. As such, if 40 virtual address bits are implemented in a segment, the size of the segment is $2^{\text{SEGBITS}} = 2^{40}$ bytes.						

Table 1.1 Symbols Used in Instruction Operation Statements (Continued)

Symbol	Meaning
FP32RegistersMode	Indicates whether the FPU has 32-bit or 64-bit floating point registers (FPRs). It is optional if the FPU has 32 64-bit FPRs in which 64-bit data types are stored in any FPR. microMIPS64 implementations have a compatibility mode in which the processor references the FPRs as if it were a microMIPS32 implementation. In such a case FP32RegisterMode is computed from the FR bit in the <i>Status</i> register. If this bit is a 0, the processor operates as if it had 32 32-bit FPRs. If this bit is a 1, the processor operates with 32 64-bit FPRs. The value of FP32RegistersMode is computed from the FR bit in the <i>Status</i> register.
InstructionInBranchDelaySlot	Indicates whether the instruction at the Program Counter address was executed in the delay slot of a branch or jump. This condition reflects the <i>dynamic</i> state of the instruction, not the <i>static</i> state. That is, the value is false if a branch or jump occurs to an instruction whose PC immediately follows a branch or jump, but which is not executed in the delay slot of a branch or jump.
SignalException(exception, argument)	Causes an exception to be signaled, using the exception parameter as the type of exception and the argument parameter as an exception-specific argument). Control does not return from this pseudocode function—the exception is signaled at the point of the call.

1.4 For More Information

Various MIPS RISC processor manuals and additional information about MIPS products can be found at the MIPS URL: <http://www.mips.com>

For comments or questions on the MIPS64® Architecture or this document, send Email to support@mips.com.

Guide to the Instruction Set


This chapter provides a detailed guide to understanding the instruction descriptions, which are listed in alphabetical order in the tables at the beginning of the next chapter.

2.1 Understanding the Instruction Fields

Figure 2.1 shows an example instruction. Following the figure are descriptions of the fields listed below:

- “Instruction Fields” on page 25
- “Instruction Descriptive Name and Mnemonic” on page 25
- “Format Field” on page 25
- “Purpose Field” on page 26
- “Description Field” on page 26
- “Restrictions Field” on page 26
- “Operation Field” on page 27
- “Exceptions Field” on page 27
- “Programming Notes and Implementation Notes Fields” on page 28

Figure 2.1 Example of Instruction Description

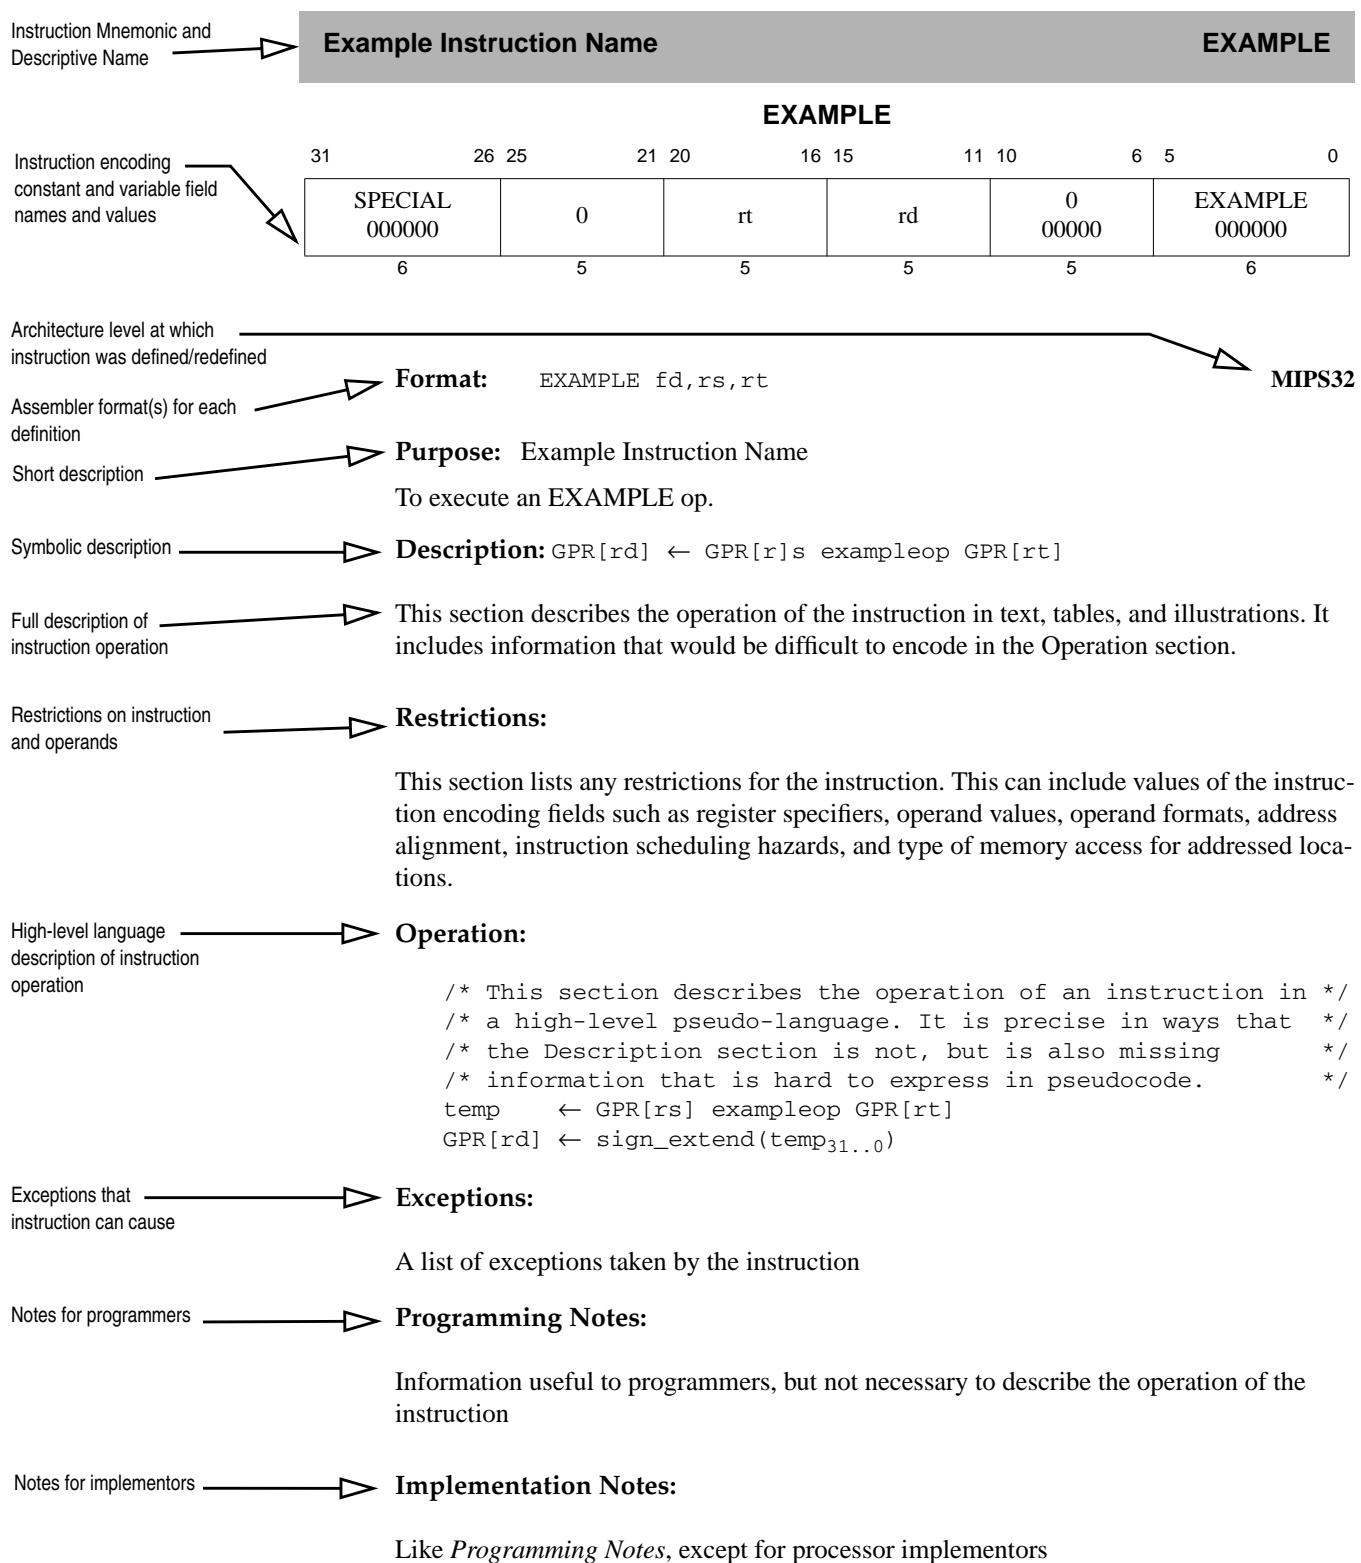

2.1.1 Instruction Fields

Fields encoding the instruction word are shown in register form at the top of the instruction description. The following rules are followed:

- The values of constant fields and the *opcode* names are listed in uppercase (SPECIAL and ADD in Figure 2.2). Constant values in a field are shown in binary below the symbolic or hexadecimal value.
- All variable fields are listed with the lowercase names used in the instruction description (*rs*, *rt*, and *rd* in Figure 2.2).
- Fields that contain zeros but are not named are unused fields that are required to be zero (bits 10:6 in Figure 2.2). If such fields are set to non-zero values, the operation of the processor is **UNPREDICTABLE**.

Figure 2.2 Example of Instruction Fields

31	26 25	21 20	16 15	11 10	6 5	0
SPECIAL 000000	rs	rt	rd	0 00000	ADD 100000	
6	5	5	5	5	6	

2.1.2 Instruction Descriptive Name and Mnemonic

The instruction descriptive name and mnemonic are printed as page headings for each instruction, as shown in Figure 2.3.

Figure 2.3 Example of Instruction Descriptive Name and Mnemonic

Add Word	ADD
----------	-----

2.1.3 Format Field

The assembler formats for the instruction and the architecture level at which the instruction was originally defined are given in the *Format* field. If the instruction definition was later extended, the architecture levels at which it was extended and the assembler formats for the extended definition are shown in their order of extension (for an example, see [C.cond.fmt](#)). The MIPS architecture levels are inclusive; higher architecture levels include all instructions in previous levels. Extensions to instructions are backwards compatible. The original assembler formats are valid for the extended architecture.

Figure 2.4 Example of Instruction Format

Format:	ADD fd,rs,rt	MIPS32
----------------	--------------	--------

The assembler format is shown with literal parts of the assembler instruction printed in uppercase characters. The variable parts, the operands, are shown as the lowercase names of the appropriate fields. The architectural level at which the instruction was first defined, for example “MIPS32” is shown at the right side of the page.

There can be more than one assembler format for each architecture level. Floating point operations on formatted data show an assembly format with the actual assembler mnemonic for each valid value of the *fmt* field. For example, the ADD.fmt instruction lists both ADD.S and ADD.D.

The assembler format lines sometimes include parenthetical comments to help explain variations in the formats (once again, see C.cond(fmt)). These comments are not a part of the assembler format.

The term *decoded_immediate* is used if the immediate field is encoded within the binary format but the assembler format uses the decoded value. The term *left_shifted_offset* is used if the offset field is encoded within the binary format but the assembler format uses value after the appropriate amount of left shifting.

2.1.4 Purpose Field

The *Purpose* field gives a short description of the use of the instruction.

Figure 2.5 Example of Instruction Purpose

Purpose: Add Word

To add 32-bit integers. If an overflow occurs, then trap.

2.1.5 Description Field

If a one-line symbolic description of the instruction is feasible, it appears immediately to the right of the *Description* heading. The main purpose is to show how fields in the instruction are used in the arithmetic or logical operation.

Figure 2.6 Example of Instruction Description

Description: GPR[rd] \leftarrow GPR[rs] + GPR[rt]

The 32-bit word value in GPR *rt* is added to the 32-bit value in GPR *rs* to produce a 32-bit result.

- If the addition results in 32-bit 2's complement arithmetic overflow, the destination register is not modified and an Integer Overflow exception occurs.
- If the addition does not overflow, the 32-bit result is signed-extended and placed into GPR *rd*.

The body of the section is a description of the operation of the instruction in text, tables, and figures. This description complements the high-level language description in the *Operation* section.

This section uses acronyms for register descriptions. “GPR *rt*” is CPU general-purpose register specified by the instruction field *rt*. “FPR *fs*” is the floating point operand register specified by the instruction field *fs*. “CP1 register *fd*” is the coprocessor 1 general register specified by the instruction field *fd*. “FCSR” is the floating point *Control /Status* register.

2.1.6 Restrictions Field

The *Restrictions* field documents any possible restrictions that may affect the instruction. Most restrictions fall into one of the following six categories:

- Valid values for instruction fields (for example, see floating point ADD.fmt)

- ALIGNMENT requirements for memory addresses (for example, see [LW](#))
- Valid values of operands (for example, see [DADD](#))
- Valid operand formats (for example, see floating point [ADD fmt](#))
- Order of instructions necessary to guarantee correct execution. These ordering constraints avoid pipeline hazards for which some processors do not have hardware interlocks (for example, see [MUL](#)).
- Valid memory access types (for example, see [LL/SC](#))

Figure 2.7 Example of Instruction Restrictions**Restrictions:**

If either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits $_{63..31}$ equal), then the result of the operation is UNPREDICTABLE.

2.1.7 Operation Field

The *Operation* field describes the operation of the instruction as pseudocode in a high-level language notation resembling Pascal. This formal description complements the *Description* section; it is not complete in itself because many of the restrictions are either difficult to include in the pseudocode or are omitted for legibility.

Figure 2.8 Example of Instruction Operation**Operation:**

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← (GPR[rs]31 | GPR[rs]31..0) + (GPR[rt]31 | GPR[rt]31..0)
if temp32 ≠ temp31 then
    SignalException(IntegerOverflow)
else
    GPR[rd] ← sign_extend(temp31..0)
endif

```

See [2.2 “Operation Section Notation and Functions”](#) on page [28](#) for more information on the formal notation used here.

2.1.8 Exceptions Field

The *Exceptions* field lists the exceptions that can be caused by *Operation* of the instruction. It omits exceptions that can be caused by the instruction fetch, for instance, TLB Refill, and also omits exceptions that can be caused by asynchronous external events such as an Interrupt. Although a Bus Error exception may be caused by the operation of a load or store instruction, this section does not list Bus Error for load and store instructions because the relationship between load and store instructions and external error indications, like Bus Error, are dependent upon the implementation.

Figure 2.9 Example of Instruction Exception

Exceptions:

Integer Overflow

An instruction may cause implementation-dependent exceptions that are not present in the *Exceptions* section.

2.1.9 Programming Notes and Implementation Notes Fields

The *Notes* sections contain material that is useful for programmers and implementors, respectively, but that is not necessary to describe the instruction and does not belong in the description sections.

Figure 2.10 Example of Instruction Programming Notes

Programming Notes:

ADDU performs the same arithmetic operation but does not trap on overflow.

2.2 Operation Section Notation and Functions

In an instruction description, the *Operation* section uses a high-level language notation to describe the operation performed by each instruction. Special symbols used in the pseudocode are described in the previous chapter. Specific pseudocode functions are described below.

This section presents information about the following topics:

- “Instruction Execution Ordering” on page 28
- “Pseudocode Functions” on page 28

2.2.1 Instruction Execution Ordering

Each of the high-level language statements in the *Operations* section are executed sequentially (except as constrained by conditional and loop constructs).

2.2.2 Pseudocode Functions

There are several functions used in the pseudocode descriptions. These are used either to make the pseudocode more readable, to abstract implementation-specific behavior, or both. These functions are defined in this section, and include the following:

- “Coprocessor General Register Access Functions” on page 29
- “Memory Operation Functions” on page 30
- “Floating Point Functions” on page 33
- “Miscellaneous Functions” on page 36

2.2.2.1 Coprocessor General Register Access Functions

Defined coprocessors, except for CP0, have instructions to exchange words and doublewords between coprocessor general registers and the rest of the system. What a coprocessor does with a word or doubleword supplied to it and how a coprocessor supplies a word or doubleword is defined by the coprocessor itself. This behavior is abstracted into the functions described in this section.

COP_LW

The COP_LW function defines the action taken by coprocessor *z* when supplied with a word from memory during a load word operation. The action is coprocessor-specific. The typical action would be to store the contents of memword in coprocessor general register *rt*.

Figure 2.11 COP_LW Pseudocode Function

```
COP_LW (z, rt, memword)
  z: The coprocessor unit number
  rt: Coprocessor general register specifier
  memword: A 32-bit word value supplied to the coprocessor

  /* Coprocessor-dependent action */

endfunction COP_LW
```

COP_LD

The COP_LD function defines the action taken by coprocessor *z* when supplied with a doubleword from memory during a load doubleword operation. The action is coprocessor-specific. The typical action would be to store the contents of memdouble in coprocessor general register *rt*.

Figure 2.12 COP_LD Pseudocode Function

```
COP_LD (z, rt, memdouble)
  z: The coprocessor unit number
  rt: Coprocessor general register specifier
  memdouble: 64-bit doubleword value supplied to the coprocessor.

  /* Coprocessor-dependent action */

endfunction COP_LD
```

COP_SW

The COP_SW function defines the action taken by coprocessor *z* to supply a word of data during a store word operation. The action is coprocessor-specific. The typical action would be to supply the contents of the low-order word in coprocessor general register *rt*.

Figure 2.13 COP_SW Pseudocode Function

```
dataword ← COP_SW (z, rt)
  z: The coprocessor unit number
  rt: Coprocessor general register specifier
  dataword: 32-bit word value

  /* Coprocessor-dependent action */
```

```
endfunction COP_SW
```

COP_SD

The COP_SD function defines the action taken by coprocessor z to supply a doubleword of data during a store doubleword operation. The action is coprocessor-specific. The typical action would be to supply the contents of the low-order doubleword in coprocessor general register rt .

Figure 2.14 COP_SD Pseudocode Function

```
datadouble ← COP_SD (z, rt)
    z: The coprocessor unit number
    rt: Coprocessor general register specifier
    datadouble: 64-bit doubleword value

    /* Coprocessor-dependent action */

endfunction COP_SD
```

CoprocessorOperation

The CoprocessorOperation function performs the specified Coprocessor operation.

Figure 2.15 CoprocessorOperation Pseudocode Function

```
CoprocessorOperation (z, cop_fun)

/* z:          Coprocessor unit number */
/* cop_fun:    Coprocessor function from function field of instruction */

/* Transmit the cop_fun value to coprocessor z */

endfunction CoprocessorOperation
```

2.2.2.2 Memory Operation Functions

Regardless of byte ordering (big- or little-endian), the address of a halfword, word, or doubleword is the smallest byte address of the bytes that form the object. For big-endian ordering this is the most-significant byte; for a little-endian ordering this is the least-significant byte.

In the *Operation* pseudocode for load and store operations, the following functions summarize the handling of virtual addresses and the access of physical memory. The size of the data item to be loaded or stored is passed in the *AccessLength* field. The valid constant names and values are shown in [Table 2.1](#). The bytes within the addressed unit of memory (word for 32-bit processors or doubleword for 64-bit processors) that are used can be determined directly from the *AccessLength* and the two or three low-order bits of the address.

AddressTranslation

The AddressTranslation function translates a virtual address to a physical address and its cacheability and coherency attribute, describing the mechanism used to resolve the memory reference.

Given the virtual address $vAddr$, and whether the reference is to Instructions or Data (*IorD*), find the corresponding physical address ($pAddr$) and the cacheability and coherency attribute (*CCA*) used to resolve the reference. If the virtual address is in one of the unmapped address spaces, the physical address and *CCA* are determined directly by the virtual address. If the virtual address is in one of the mapped address spaces then the TLB or fixed mapping MMU

determines the physical address and access type; if the required translation is not present in the TLB or the desired access is not permitted, the function fails and an exception is taken.

Figure 2.16 AddressTranslation Pseudocode Function

```
(pAddr, CCA) ← AddressTranslation (vAddr, IorD, LorS)

/* pAddr: physical address */
/* CCA: Cacheability&Coherency Attribute, the method used to access caches*/
/* and memory and resolve the reference */

/* vAddr: virtual address */
/* IorD: Indicates whether access is for INSTRUCTION or DATA */
/* LorS: Indicates whether access is for LOAD or STORE */

/* See the address translation description for the appropriate MMU */
/* type in Volume III of this book for the exact translation mechanism */

endfunction AddressTranslation
```

LoadMemory

The LoadMemory function loads a value from memory.

This action uses cache and main memory as specified in both the Cacheability Attribute (CCA) and the access (*IorD*) to find the contents of *AccessLength* memory bytes, starting at physical location *pAddr*. The data is returned in a fixed-width naturally aligned memory element (*MemElem*). The low-order 2 (or 3) bits of the address and the *AccessLength* indicate which of the bytes within *MemElem* need to be passed to the processor. If the memory access type of the reference is *uncached*, only the referenced bytes are read from memory and marked as valid within the memory element. If the access type is *cached* but the data is not present in cache, an implementation-specific *size* and *alignment* block of memory is read and loaded into the cache to satisfy a load reference. At a minimum, this block is the entire memory element.

Figure 2.17 LoadMemory Pseudocode Function

```
MemElem ← LoadMemory (CCA, AccessLength, pAddr, vAddr, IorD)

/* MemElem: Data is returned in a fixed width with a natural alignment. The */
/* width is the same size as the CPU general-purpose register, */
/* 32 or 64 bits, aligned on a 32- or 64-bit boundary, */
/* respectively. */
/* CCA: Cacheability&CoherencyAttribute=method used to access caches */
/* and memory and resolve the reference */

/* AccessLength: Length, in bytes, of access */
/* pAddr: physical address */
/* vAddr: virtual address */
/* IorD: Indicates whether access is for Instructions or Data */

endfunction LoadMemory
```

StoreMemory

The StoreMemory function stores a value to memory.

The specified data is stored into the physical location *pAddr* using the memory hierarchy (data caches and main memory) as specified by the Cacheability and Coherency Attribute (*CCA*). The *MemElem* contains the data for an aligned, fixed-width memory element (a word for 32-bit processors, a doubleword for 64-bit processors), though only the bytes that are actually stored to memory need be valid. The low-order two (or three) bits of *pAddr* and the *AccessLength* field indicate which of the bytes within the *MemElem* data should be stored; only these bytes in memory will actually be changed.

Figure 2.18 StoreMemory Pseudocode Function

```
StoreMemory (CCA, AccessLength, MemElem, pAddr, vAddr)

/* CCA:      Cacheability&Coherency Attribute, the method used to access */
/*           caches and memory and resolve the reference. */
/* AccessLength: Length, in bytes, of access */
/* MemElem:   Data in the width and alignment of a memory element. */
/*           The width is the same size as the CPU general */
/*           purpose register, either 4 or 8 bytes, */
/*           aligned on a 4- or 8-byte boundary. For a */
/*           partial-memory-element store, only the bytes that will be*/
/*           stored must be valid.*/
/* pAddr:    physical address */
/* vAddr:    virtual address */

endfunction StoreMemory
```

Prefetch

The Prefetch function prefetches data from memory.

Prefetch is an advisory instruction for which an implementation-specific action is taken. The action taken may increase performance but must not change the meaning of the program or alter architecturally visible state.

Figure 2.19 Prefetch Pseudocode Function

```
Prefetch (CCA, pAddr, vAddr, DATA, hint)

/* CCA:      Cacheability&Coherency Attribute, the method used to access */
/*           caches and memory and resolve the reference. */
/* pAddr:    physical address */
/* vAddr:    virtual address */
/* DATA:     Indicates that access is for DATA */
/* hint:     hint that indicates the possible use of the data */

endfunction Prefetch
```

Table 2.1 lists the data access lengths and their labels for loads and stores.

Table 2.1 AccessLength Specifications for Loads/Stores

AccessLength Name	Value	Meaning
DOUBLEWORD	7	8 bytes (64 bits)
SEPTIBYTE	6	7 bytes (56 bits)
SEXTIBYTE	5	6 bytes (48 bits)
QUINTIBYTE	4	5 bytes (40 bits)

Table 2.1 AccessLength Specifications for Loads/Stores

AccessLength Name	Value	Meaning
WORD	3	4 bytes (32 bits)
TRIPLEBYTE	2	3 bytes (24 bits)
HALFWORD	1	2 bytes (16 bits)
BYTE	0	1 byte (8 bits)

SyncOperation

The SyncOperation function orders loads and stores to synchronize shared memory.

This action makes the effects of the synchronizable loads and stores indicated by *stype* occur in the same order for all processors.

Figure 2.20 SyncOperation Pseudocode Function

```
SyncOperation(stype)

/* stype: Type of load/store ordering to perform. */

/* Perform implementation-dependent operation to complete the */
/* required synchronization operation */

endfunction SyncOperation
```

2.2.2.3 Floating Point Functions

The pseudocode shown below specifies how the unformatted contents loaded or moved to CP1 registers are interpreted to form a formatted value. If an FPR contains a value in some format, rather than unformatted contents from a load (uninterpreted), it is valid to interpret the value in that format (but not to interpret it in a different format).

ValueFPR

The ValueFPR function returns a formatted value from the floating point registers.

Figure 2.21 ValueFPR Pseudocode Function

```
value ← ValueFPR(fpr, fmt)

/* value: The formatted value from the FPR */

/* fpr: The FPR number */
/* fmt: The format of the data, one of: */
/*      S, D, W, L, PS, */
/*      OB, QH, */
/*      UNINTERPRETED_WORD, */
/*      UNINTERPRETED_DOUBLEWORD */
/* The UNINTERPRETED values are used to indicate that the datatype */
/* is not known as, for example, in SWC1 and SDC1 */

case fmt of
  S, W, UNINTERPRETED_WORD:
    valueFPR ← UNPREDICTABLE32 || FPR[fpr]31..0
```

Guide to the Instruction Set

```
D, UNINTERPRETED_DOUBLEWORD:  
    if (FP32RegistersMode = 0)  
        if (fpr0 ≠ 0) then  
            valueFPR ← UNPREDICTABLE  
        else  
            valueFPR ← FPR[fpr+1]31..0 || FPR[fpr]31..0  
        endif  
    else  
        valueFPR ← FPR[fpr]  
    endif  
  
L, PS, OB, QH:  
    if (FP32RegistersMode = 0) then  
        valueFPR ← UNPREDICTABLE  
    else  
        valueFPR ← FPR[fpr]  
    endif  
  
DEFAULT:  
    valueFPR ← UNPREDICTABLE  
  
endcase  
endfunction ValueFPR
```

The pseudocode shown below specifies the way a binary encoding representing a formatted value is stored into CP1 registers by a computational or move operation. This binary representation is visible to store or move-from instructions. Once an FPR receives a value from the StoreFPR(), it is not valid to interpret the value with ValueFPR() in a different format.

StoreFPR

Figure 2.22 StoreFPR Pseudocode Function

```
StoreFPR (fpr, fmt, value)  
  
/* fpr: The FPR number */  
/* fmt: The format of the data, one of: */  
/*      S, D, W, L, PS, */  
/*      OB, QH, */  
/*      UNINTERPRETED_WORD, */  
/*      UNINTERPRETED_DOUBLEWORD */  
/* value: The formattted value to be stored into the FPR */  
  
/* The UNINTERPRETED values are used to indicate that the datatype */  
/* is not known as, for example, in LWC1 and LDC1 */  
  
case fmt of  
    S, W, UNINTERPRETED_WORD:  
        FPR[fpr] ← UNPREDICTABLE32 || value31..0  
  
    D, UNINTERPRETED_DOUBLEWORD:  
        if (FP32RegistersMode = 0)  
            if (fpr0 ≠ 0) then  
                UNPREDICTABLE  
            else  
                FPR[fpr] ← UNPREDICTABLE32 || value31..0
```

```

        FPR[fpr+1] ← UNPREDICTABLE32 || value63..32
    endif
else
    FPR[fpr] ← value
endif

L, PS, OB, QH:
if (FP32RegistersMode = 0) then
    UNPREDICTABLE
else
    FPR[fpr] ← value
endif

endcase

endfunction StoreFPR

```

The pseudocode shown below checks for an enabled floating point exception and conditionally signals the exception.

CheckFPEException

Figure 2.23 CheckFPEException Pseudocode Function

```

CheckFPEException()

/* A floating point exception is signaled if the E bit of the Cause field is a 1 */
/* (Unimplemented Operations have no enable) or if any bit in the Cause field */
/* and the corresponding bit in the Enable field are both 1 */

if ( (FCSR17 = 1) or
      ((FCSR16..12 and FCSR11..7) ≠ 0)) ) then
    SignalException(FloatingPointException)
endif

endfunction CheckFPEException

```

FPCConditionCode

The FPCConditionCode function returns the value of a specific floating point condition code.

Figure 2.24 FPCConditionCode Pseudocode Function

```

tf ← FPCConditionCode(cc)

/* tf: The value of the specified condition code */

/* cc: The Condition code number in the range 0..7 */

if cc = 0 then
    FPCConditionCode ← FCSR23
else
    FPCConditionCode ← FCSR24+cc
endif

endfunction FPCConditionCode

```

SetFPCConditionCode

The SetFPCConditionCode function writes a new value to a specific floating point condition code.

Figure 2.25 SetFPCConditionCode Pseudocode Function

```
SetFPCConditionCode(cc, tf)
    if cc = 0 then
        FCSR ← FCSR31..24 || tf || FCSR22..0
    else
        FCSR ← FCSR31..25+cc || tf || FCSR23+cc..0
    endif

endfunction SetFPCConditionCode
```

2.2.2.4 Miscellaneous Functions

This section lists miscellaneous functions not covered in previous sections.

SignalException

The SignalException function signals an exception condition.

This action results in an exception that aborts the instruction. The instruction operation pseudocode never sees a return from this function call.

Figure 2.26 SignalException Pseudocode Function

```
SignalException(Exception, argument)

/* Exception:      The exception condition that exists. */
/* argument:       A exception-dependent argument, if any */

endfunction SignalException
```

SignalDebugBreakpointException

The SignalDebugBreakpointException function signals a condition that causes entry into Debug Mode from non-Debug Mode.

This action results in an exception that aborts the instruction. The instruction operation pseudocode never sees a return from this function call.

Figure 2.27 SignalDebugBreakpointException Pseudocode Function

```
SignalDebugBreakpointException()

endfunction SignalDebugBreakpointException
```

SignalDebugModeBreakpointException

The SignalDebugModeBreakpointException function signals a condition that causes entry into Debug Mode from Debug Mode (i.e., an exception generated while already running in Debug Mode).

This action results in an exception that aborts the instruction. The instruction operation pseudocode never sees a return from this function call.

Figure 2.28 SignalDebugModeBreakpointException Pseudocode Function

```
SignalDebugModeBreakpointException()
endfunction SignalDebugModeBreakpointException
```

NullifyCurrentInstruction

The NullifyCurrentInstruction function nullifies the current instruction.

The instruction is aborted, inhibiting not only the functional effect of the instruction, but also inhibiting all exceptions detected during fetch, decode, or execution of the instruction in question. For branch-like instructions, nullification kills the instruction in the delay slot of the branch likely instruction.

Figure 2.29 NullifyCurrentInstruction PseudoCode Function

```
NullifyCurrentInstruction()
endfunction NullifyCurrentInstruction
```

JumpDelaySlot

The JumpDelaySlot function is used in the pseudocode for the PC-relative instructions in the MIPS16e ASE. The function returns TRUE if the instruction at *vAddr* is executed in a jump delay slot. A jump delay slot always immediately follows a JR, JAL, JALR, or JALX instruction.

Figure 2.30 JumpDelaySlot Pseudocode Function

```
JumpDelaySlot (vAddr)
/*
 * vAddr:Virtual address */
endfunction JumpDelaySlot
```

NotWordValue

The NotWordValue function returns a boolean value that determines whether the 64-bit value contains a valid word (32-bit) value. Such a value has bits 63..32 equal to bit 31.

Figure 2.31 NotWordValue Pseudocode Function

```
result ← NotWordValue(value)

/* result:    True if the value is not a correct sign-extended word value; */
/*           False otherwise */

/* value:     A 64-bit register value to be checked */

NotWordValue ← value63..32 ≠ (value31)32

endfunction NotWordValue
```

PolyMult

The PolyMult function multiplies two binary polynomial coefficients.

Figure 2.32 PolyMult Pseudocode Function

```

PolyMult(x, y)
    temp ← 0
    for i in 0 .. 31
        if  $x_i = 1$  then
            temp ← temp xor ( $y_{(31-i) \dots 0} || 0^i$ )
        endif
    endfor

    PolyMult ← temp

endfunction PolyMult

```

2.3 Op and Function Subfield Notation

In some instructions, the instruction subfields *op* and *function* can have constant 5- or 6-bit values. When reference is made to these instructions, uppercase mnemonics are used. For instance, in the floating point ADD instruction, *op*=COP1 and *function*=ADD. In other cases, a single field has both fixed and variable subfields, so the name contains both upper- and lowercase characters.

2.4 FPU Instructions

In the detailed description of each FPU instruction, all variable subfields in an instruction format (such as *fs*, *ft*, *immediate*, and so on) are shown in lowercase. The instruction name (such as ADD, SUB, and so on) is shown in uppercase.

For the sake of clarity, an alias is sometimes used for a variable subfield in the formats of specific instructions. For example, *rs*=*base* in the format for load and store instructions. Such an alias is always lowercase since it refers to a variable subfield.

Bit encodings for mnemonics are given in Volume I, in the chapters describing the CPU, FPU, MDMX, and MIPS16e instructions.

See “Op and Function Subfield Notation” on page 38 for a description of the *op* and *function* subfields.

Introduction

In today's market, the lowest price/performance points must be satisfied, especially for deeply-embedded applications such as microcontroller applications. Moreover, customers require efficient solutions that can be turned into products quickly. To meet this need, the MIPS® instruction set has been optimized and re-encoded into a new variable-length scheme. This solution is called microMIPS™.

microMIPS minimizes the resulting code footprint of applications and it therefore reduces the cost of memory, which is particularly high for embedded memory. Simultaneously, the high performance of MIPS cores is maintained. Using this technology, the customer can generate best results without spending time to profile its application. The smaller code footprint typically leads to reduced power consumption per executed task because of the smaller number of memory accesses.

microMIPS is the preferred replacement for the existing MIPS16e™ ASE. MIPS16e could only be used for usermode programs which did not use floating-point nor any of the Application Specific Extensions (ASEs). microMIPS does not have these limitations - it can be used for kernelmode code as well as usermode programs; it can be used for programs which use floating-point; it can be used with the available ASEs.

microMIPS is also an alternative to the MIPS64® instruction encoding and can be implemented in parallel or stand-alone. The microMIPS equivalent of MIPS32 is named microMIPS32™ and the microMIPS equivalent of MIPS64 is microMIPS64™.

Overview of changes vs. existing MIPS64 ISA:

- 16-bit and 32-bit opcodes
- Optimized opcode/operand field definitions based on statistics
- Branch and jump delay slots will be kept for maximum compatibility and lowest risk
- Removal of branch likely instructions, emulation by assembler
- Fine-tuned register allocation algorithm in the compiler for lowest code size

3.1 Release 3 of the MIPS Architecture

Enhancements included in Release 3 of the MIPS Architecture (also known as MIPSr3™) are:

- microMIPS: The MIPS Release 3 Architecture (also known as MIPSr3™) supports both the MIPS64 instruction set and microMIPS64™ instruction set. Both can be implemented either in parallel or stand-alone. For the first implementations, microMIPS will be primarily implemented together with MIPS64 encoded instruction execution.
- microMIPS is the preferred replacement for MIPS16e. Therefore these two schemes never co-exist within the same processor core.

- Branch likely instructions are phased out in microMIPS and are emulated by the assembler. They remain available in the MIPS64 encoding.

Unless otherwise described in this document, all other aspects of the microMIPS64 architecture are identical to MIPS64 Release 2.

3.2 Default ISA Mode

The instruction sets which are available within an implementation are reported by the *Config3_{ISA}* register field (bits 15:14). *Config1_{CA}* (bit 2) is not used for microMIPS64.

For implementations that support both microMIPS64 and MIPS64, the selected ISA mode following reset is determined by the setting of the *Config3_{ISA}* register field., which is a read-only field set by a hardware signal external to the processor core.

For implementations that support both microMIPS64 and MIPS64, the selected ISA mode upon handling an exception is determined by the setting of the *Config3_{ISAOnExc}* register field (bit 16). The *Config3_{ISAOnExc}* register field is writeable by software and has a reset value that is set by a hardware signal external to the processor core. This register field allows privileged software to change the ISA mode to be used for subsequent exceptions. This capability is for all exception types whose vectors are offsets of the *EBASE* register.

For implementations that support both microMIPS64 and MIPS64, the selected ISA mode when handling a debug exception is determined by the setting of the *ISAOnDebug* register field in the *EJTAG TAP Control* register. This register field is writeable by EJTAG probe software and has a reset value that is set by a hardware signal external to the processor core.

For CPU cores supporting the MT ASE and multiple VPEs, the ISA mode for exceptions can be selected on a per-VPE basis.

3.3 Software Detection

Software can determine if microMIPS64 ISA is implemented by checking the state of the ISA (Instruction Set Architecture) field in the *Config3 CP0* register. *Config1_{CA}* (bit 2) is not used for microMIPS64.

Software can determine if the MIPS64 ISA is implemented by checking the state of the ISA (Instruction Set Architecture) register field in the *Config3 CP0* register.

Software can determine which ISA is used when handling an exception by checking the state of the *ISAOnExc* (ISA on Exception) field in the *Config3 CP0* register.

Debug Probe Software can determine which ISA is used when handling a debug exception by checking the state of the *ISAOnDebug* field in the *EJTAG TAP Control* register.

3.4 Compliance and Subsetting

This document does not change the instruction subsets as defined by the other MIPS architecture reference manuals, including the subsets defined by the various ASEs.

3.5 ISA Mode Switch

The MIPS Release 3 architecture defines an ISA mode for each processor. An ISA mode value of 0 indicates MIPS64 instruction decoding. In processors implementing microMIPS64, an ISA mode value of 1 selects microMIPS64 instruction decoding. In processors implementing the MIPS16e ASE, an ISA mode value of 1 selects the decoding of instructions as MIPS16e.

The ISA mode is not directly visible to usermode software. Upon an exception, the ISA mode of the faulting/interrupted instruction is recorded in the least significant address bit within the appropriate return address register - either EPC or ErrorEPC or DebugEPC depending on the exception type.

For the rest of this section, the following definitions are used:

Jump-and-Link-Register instructions: For the MIPS64 ISA, this means the JALR and JALR.HB instructions. For the microMIPS64 ISA, this means the JALR, JALR.HB, JALR16, JALRS, JALRS16 and JALRS.HB instructions.

Jump-Register instructions: For the MIPS64 ISA, this means the JR and JR.HB instructions. For the microMIPS64 ISA, this means the instructions JR, JR.HB, JR16, JRC and JRADDIUSP instructions.

Mode switching between MIPS64 and microMIPS64 uses the same mechanism used by MIPS16e, namely, the JALX, Jump-and-Link-Register and Jump-Register instructions, as described below.

- The JALX instruction executes a JAL and switches to the other mode.
- The Jump-and-Link-Register and Jump-Register instructions interpret bit 0 of the source registers as the target ISA mode (0=MIPS64, 1=microMIPS64) and therefore set the ISA Mode bit according to the contents of bit 0 of the source register. For the actual jump operation, the PC is loaded with the value of the source register with bit 0 set to 0. The Jump-and-Link-Register instructions save the ISA mode into bit 0 of the destination register.
- When exceptions or interrupts occur and the processor writes to *EPC*, *DEPC*, or *ErrorEPC*, the ISA Mode bit is saved into bit 0 of these registers. Then the ISA Mode bit is set according to the *Config3_{ISA}* register field. On return from an exception, the processor loads the ISA Mode bit based on the value from either *EPC*, *DEPC*, or *ErrorEPC*.

If only one ISA mode exists (either MIPS64 or microMIPS64) then this mode switch mechanism does not exist, but the ISA Mode bit is still maintained and has a fixed value (0=MIPS64, 1=microMIPS64). This is to maintain code compatibility between devices which implement both ISA modes and devices which implement only one ISA mode. Executing the JALX instruction will cause a Reserved Instruction exception. Jump-Register and Jump-and-Link-Register instructions cause an Address exception on the target instruction fetch when bit 0 of the source register is different from the fixed ISA mode. Exception handlers must use the instruction set binary format supported by the processor. The Jump-and-Link-Register instructions must still save the fixed ISA mode into bit 0 of the destination register.

3.6 Branch and Jump Offsets

In the MIPS64 architecture, because instructions are always 32 bits in size, the jump and branch target addresses are word (32-bit) aligned. Jump/branch offset fields are shifted left by two bits to create a word-aligned effective address.

In the microMIPS64 architecture, because instructions can be either 16 or 32 bits in size, the jump and branch target addresses are halfword (16-bit) aligned. Branch/jusmp offset fields are shifted left by only one bit to create halfword-aligned effective addresses.

To maintain the existing MIPS64 ABIs, link unit/object file entry points are restricted to 32-bit word alignments. In the future, a microMIPS64-only ABI can be created to remove this restriction.

3.7 Coprocessor Unusable Behavior

If an instruction associated with a non-implemented coprocessor is executed, it is implementation specific whether a processor executing in microMIPS64 mode raises an RI exception or a coprocessor unusable exception. This behavior is different from the MIPS64 behavior in which coprocessor unusable exception is signalled for such cases.

If the microMIPS64 implementation chooses to use RI exception in such cases, the microMIPS64 RI exception handler must check for coprocessor instructions being executed while the associated coprocessor is implemented but has been disabled ($Status_{CUx}$ set to zero).

Instruction Formats

This chapter defines the formats of microMIPS instructions. The microMIPS variable-length encoding comprises 16-bit and 32-bit wide instructions. The 6-bit major opcode is left-aligned within the instruction encoding. Instructions can have 0 to 4 register fields. For 32-bit instructions, the register field width is 5 bits, while for most 16-bit instructions, the register field width is 3 bits, utilizing instruction-specific register encoding. All 5-bit register fields are located at a constant position within the instruction encoding.

The immediate field is right-aligned in the following instructions:


- some 16-bit instructions with 3-bit register fields
- 32-bit instructions with 16-bit or 26-bit immediate field

The name ‘immediate field’ as used here includes the address offset field for branches and load/store instructions as well as the jump target field.

Other instruction-specific fields are typically located between the immediate and minor opcode fields. Instructions that have multiple “other” fields are listed in alphabetical order according to the name of the field, with the first name of the order located at the lower bit position. An empty bit field that is not explicitly shown in the instruction format is located next to the minor opcode field.

[Figure 4.1](#) and [Figure 4.2](#) show the 16-bit and 32-bit instruction formats.

Figure 4.1 16-Bit Instruction Formats

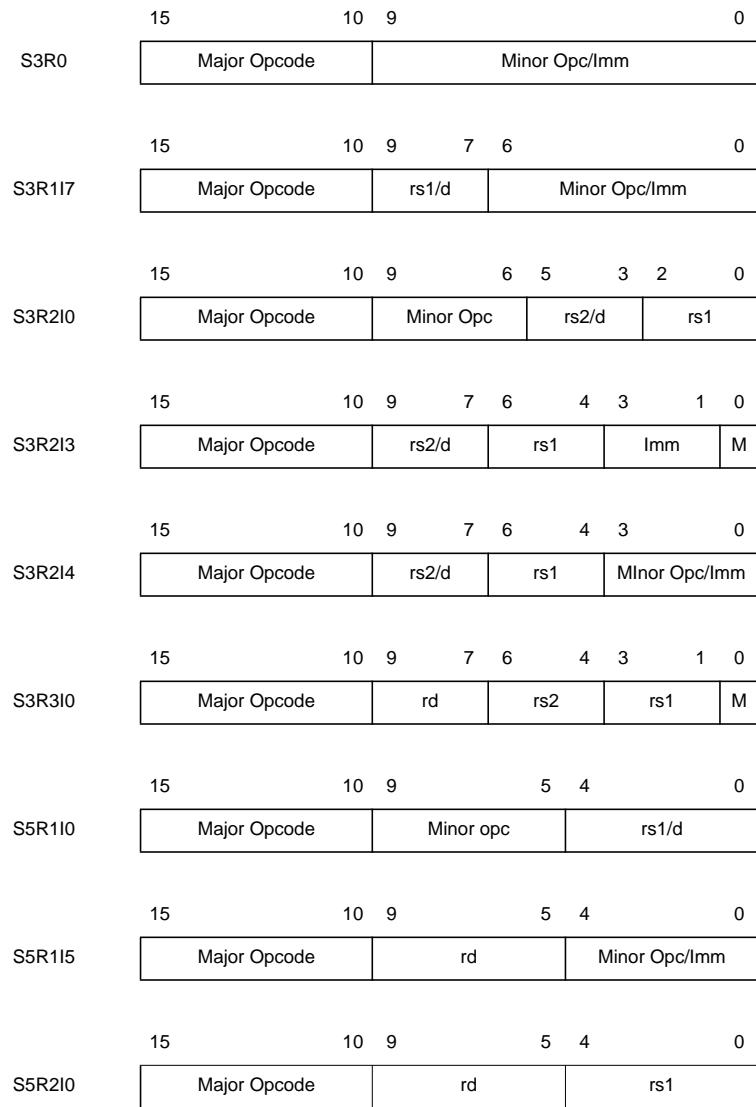

Instruction Formats

Figure 4.2 32-Bit Instruction Formats

R0	31 26 25	0				
	Major Opcode	Immediate/Minor Opcode/Other				
R1	31 26 25 21 20 16 15	0				
	Major Opcode	Imm/Other	rs/fs/base	Immediate/Minor Opcode/Other		
R2	31 26 25 21 20 16 15	0				
	Major Opcode	rt/ft/index	rs/fs/base	Immediate/Minor Opcode/Other		
R3	31 26 25 21 20 16 15 11 10	0				
	Major Opcode	rt/ft/index	rs/fs/base	rd/fd	Immediate/Minor Opcode/Other	
R4	31 26 25 21 20 16 15 11 10 6 5	0				
	Major Opcode	rt/ft	rs/fs	rd/fd	rr/fr	Minor Opcode/Other

Figure 4.3 Immediate Fields within 32-Bit Instructions

32-bit instruction formats with 26-bit immediate fields:

R0I26	31 26 25	0	
	Major Opcode	Immediate	
R0I16	31 26 25 16 15	0	
	Major Opcode	Minor Opcode/Other	Immediate

32-bit instruction formats with 16-bit immediate fields:

R1I16	31 26 25 21 20 16 15	0		
	Major Opcode	Minor Opcode/Other	rs/fs	Immediate
R2I16	31 26 25 21 20 16 15	0		
	Major Opcode	rt/ft	rs/fs	Immediate

32-bit instruction formats with 12-bit immediate fields:

R1I12	31 26 25 21 20 16 15 12 11	0			
	Major Opcode	Other	rs/fs	Minor Opcode	Immediate
R2I12	31 26 25 21 20 16 15 12 11	0			
	Major Opcode	rt/ft	rs/fs	Minor Opcode	Immediate

The instruction size can be completely derived from the major opcode. For 32-bit instructions, the major opcode also defines the position of the minor opcode field and whether or not the immediate field is right-aligned.

Instructions formats are named according to the number of the register fields and the size of the immediate field. The names have the structure R<x>I<y>. For example, an instruction based on the format R2I16 has 2 register fields and a 16-bit immediate field.

Table 4.1 shows all formats. The 16-bit formats refer to either 3-bit or 5-bit register fields. To visualize this, a 16-bit format name starts with the prefix S3 or S5 respectively.

Table 4.1 microMIPS Opcode Formats

32-bit Instruction Formats (existing instructions)	32-bit Instruction Formats (additional format(s) for new instructions)	16-bit Instruction Formats
R0I0	R2I12	S3R0I0
R0I8		S3R0I10
R0I16		S3R1I7
R0I26		S3R2I0
R1I0		S3R2I3
R1I2		S3R2I4
R1I7		S3R3I1
R1I8		S5R1I0
R1I10		S5R1I4
R1I16		S5R2I0
R2I0		
R2I2		
R2I3		
R2I4		
R2I5		
R2I10		
R2I16		
R3I0		
R3I3		
R4I0		

4.1 Instruction Stream Organization and Endianness

16-bit instructions are placed within the 32-bit (or 64-bit) memory element according to system endianness.

Instruction Formats

- On a 32-bit processor in big-endian mode, the first instruction is read from bits 31..16, and the second instruction is read from bits 15..0.
- On a 32-bit processor in little-endian mode, the first instruction is read from bits 15..0, and the second instruction is read from bits 31..16.

The above rule also applies to the halfwords of 32-bit instructions. This means that a 32-bit instruction is not treated as a word data type; instead, the halfwords are treated in the same way as individual 16-bit instructions. The halfword containing the major opcode is always the first in the sequence.

Example:

```
SRL r1, r1, 7      binary opcode fields: 000000 00001 00001 00111 00001 000000
                                         hex representation:    0021 3840

                                         Address:   3   2   1   0
LittleEndian:      Data:        38 40 00 21

                                         Address:   0   1   2   3
BigEndian:        Data:        00 21 38 40
```

Instructions are placed in memory such that they are in-order with respect to the address.

microMIPS Re-encoded Instructions

This chapter lists all microMIPS re-encoded instructions, sorted into 16-bit and 32-bit categories.

In the 16-bit category:

- Frequent MIPS64 instructions and macros, re-encoded as 16-bit. Register and immediate fields are reduced in size by using encodings of frequently occurring values.

In the 32-bit category:

- All MIPS64 instructions, including all application-specific extensions except MIPS16e, re-encoded: MIPS64, MDMX ASE, MIPS-3D ASE, MIPS DSP ASE, MIPS MT ASE, and SmartMIPS ASE.
- Opcode space for user-defined instructions (UDIs).
- New instructions designed primarily to reduce code size.

To differentiate between 16-bit and 32-bit encoded instructions, the instruction mnemonic can be optionally extended with the suffix “16” or “32” respectively. This suffix is placed at the end of the instruction before the first ‘.’ if there is one. For example:

ADD16, ADD32, ADD32.PS, DADDIU32

If these suffixes are omitted, the assembler automatically chooses the smallest instruction size.

For each instruction, the tables in this chapter provide all necessary information about the bit fields. The formats of the instructions are defined in [Chapter 4, “Instruction Formats” on page 44](#). Together with the major and minor opcode encodings, which can be derived from the tables in [Chapter 6, “Opcode Map” on page 576](#), the complete instruction encoding is provided.

Most register fields have a width of 5 bits. 5-bit register fields use linear encoding ($r0='00000'$, $r1='00001'$, etc.). For 16-bit instructions, whose register field size is variable, the register field width is explicitly stated in the instruction table ([Table 5.1](#) and [Table 5.2](#)), and the individual register and immediate encodings are shown in [Table 5.3](#). The ‘other fields’ are defined by the respective column, with the order of these fields in the instruction encoding defined by the order in the tables.

5.1 16-Bit Category

5.1.1 Frequent MIPS64 Instructions

These are frequent MIPS64 instructions with reduced register and immediate fields containing frequently used registers and immediate values.

MOVE is a very frequent instruction. It therefore supports full 5-bit unrestricted register fields for maximum efficiency. In fact, MOVE used to be a simplified macro of an existing MIPS64 instruction.

There are 2 variants of the LW and SW instructions. One variant implicitly uses the SP register to allow for a larger offset field. The value in the offset field is shifted left by 2 before it is added to the base address.

There are four variants of the ADDIU instruction:

1. A variant with one 5-bit register specifier that allows any GPR to be the source and destination register
2. A variant that uses the stack pointer as the implicit source and destination register
3. A variant that has separate 3-bit source and destination register specifiers
4. A variant that has the stack pointer as the implicit source register and one 3-bit destination register specifier

A 16-bit NOP instruction is needed because of the new 16-bit instruction alignment and the need in specific cases to align instructions on a 32-bit boundary. It can save code size as well. NOP is not shown in the table because it is realized as a macro (as is NEGU).

```
NOP16 = MOVE16 r0, r0
NEGU16 rt, rs = SUBU16 rt, r0, rs
```

Because microMIPS instructions are 16-bit aligned, the 16-bit branch instructions support 16-bit aligned branch target addresses. The offset field is left shifted by 1 before it is added to the PC.

The compact instruction JRC is to be used instead of JR, when the jump delay slot after JR cannot be filled. This saves code size. Because JRC may execute as fast as JR with a NOP in the delay slot, JR is preferred if the delay slot can be filled.

The breakpoint instructions, BREAK and SDBBP, include a 16-bit variant that allows a breakpoint to be inserted at any instruction address without overwriting more than a single instruction.

Table 5.1 16-Bit Re-encoding of Frequent MIPS64 Instructions

Instruction	Major Opcode Name	Number of Register Fields	Immediate Field Size (bit)	Register Field Width (bit)	Total Size of Other Fields	Empty 0 Field Size (bit)	Minor Opcode Size (bit)	Comment
ADDIUS5	POOL16D	5bit:1	4	5		0	1	Add Immediate Unsigned Word Same Register

microMIPS Re-encoded Instructions

Table 5.1 16-Bit Re-encoding of Frequent MIPS64 Instructions (Continued)

Instruction	Major Opcode Name	Number of Register Fields	Immediate Field Size (bit)	Register Field Width (bit)	Total Size of Other Fields	Empty 0 Field Size (bit)	Minor Opcode Size (bit)	Comment
ADDIUSP	POOL16D	0	9	0		0	1	Add Immediate Unsigned Word to Stack Pointer
ADDIUR2	POOL16E	2	3	3		0	1	Add Immediate Unsigned Word Two Registers
ADDIUR1SP	POOL16E	1	6	3		0	1	Add Immediate Unsigned Word One Registers and Stack Pointer
ADDU16	POOL16A	3	0	3		0	1	Add Unsigned Word
AND16	POOL16C	2	0	3		0	4	AND
ANDI16	ANDI16	2	4	3		0	0	AND Immediate
B16	B16	0	10			0	0	Branch
BREAK16	POOL16C	0	0		4	0	6	Cause Breakpoint Exception
JALR16	POOL16C	1	0	5		0	5	Jump and Link Register, 32-bit delay-slot
JALRS16	POOL16C	1	0	5		0	5	Jump and Link Register, 16-bit delay-slot
JR16	POOL16C	1	0	5		0	5	Jump Register
LBU16	LBU16	2	4	3		0	0	Load Byte Unsigned
LHU16	LHU16	2	4	3		0	0	Load Halfword
LI16	LI16	1	7	3		0	0	Load Immediate
LW16	LW16	2	4	3		0	0	Load Word
LWGP	LWGP16	1	7	3		0	0	Load Word GP
LWSP	LWSP16	5bit:1	5	5		0	0	Load Word SP
MFHI16	POOL16C	1	0	5		0	5	Move from HI Register
MFLO16	POOL16C	1	0	5		0	5	Move from LO Register
MOVE16	MOVE16	2	0	5		0	0	Move
NOT16	POOL16C	2	0	3		0	4	NOT
OR16	POOL16C	2	0	3		0	4	OR
SB16	SB16	2	4	3		0	0	Store Byte
SDBBP16	POOL16C	0	0		4	0	6	Cause Debug Breakpoint Exception
SH16	SH16	2	4	3		0	0	Store Halfword

Table 5.1 16-Bit Re-encoding of Frequent MIPS64 Instructions (Continued)

Instruction	Major Opcode Name	Number of Register Fields	Immediate Field Size (bit)	Register Field Width (bit)	Total Size of Other Fields	Empty 0 Field Size (bit)	Minor Opcode Size (bit)	Comment
SLL16	POOL16B	2	3	3		0	1	Shift Word Left Logical
SRL16	POOL16B	2	3	3		0	1	Shift Word Right Logical
SUBU16	POOL16A	3	0	3		0	1	Sub Unsigned
SW16	SW16	2	4	3		0	0	Store Word
SWSP	SWSP16	5bit:1	5	5		0	0	Store Word SP
XOR16	POOL16C	2	0	3		0	4	XOR

5.1.2 Frequent MIPS64 Instruction Sequences

These 16-bit instructions are equivalent to frequently-used short sequences of MIPS64 instructions. The instruction-specific register and immediate value selection are shown in [Table 5.3](#).

Table 5.2 16-Bit Re-encoding of Frequent MIPS64 Instruction Sequences

Instruction	Major Opcode Name	Number of Register Fields	Immediate Field Size (bit)	Register Field Width (bit)	Total Size of Other Fields	Empty 0 Field Size (bit)	Minor Opcode Size (bit)	Comment
BEQZ16	BEQZ16	1	7	3		0	0	Branch on Equal Zero
BNEZ16	BNEZ16	1	7	3		0	0	Branch on Not Equal Zero
JRADDIUSP	POOL16C	0	5				5	Jump Register; ADDIU SP
JRC	POOL16C	1	0	5		0	5	Jump Register Compact
LWM16	POOL16C	0	4		2	0	4	Load Word Multiple
MOVEP	POOL16F	3 (encoded)	0	3(encoded)		0	1	Move Register Pair
SWM16	POOL16C	0	4		2	0	4	Store Word Multiple

5.1.3 Instruction-Specific Register Specifiers and Immeidiate Field Encodings

Table 5.3 Instruction-Specific Register Specifiers and Immediate Field Values

Instruction	Number of Register Fields	Immediate Field Size (bit)	Register 1 Decoded Value	Register 2 Decoded Value	Register 3 Decoded Value	Immediate Field Decoded Value
ADDIUS5	5bit:1	4	rd: 5 bit field			-8..0..7
ADDIUSP	0	9				(-258..-3, 2..257) << 2
ADDIUR2	2	3	rs1:2-7,16, 17	rd:2-7,16, 17		-1, 1, 4, 8, 12, 16, 20, 24
ADDIUR1SP	1	6	rd:2-7,16, 17			(0..63) << 2
ADDU16	3	0	rs1:2-7,16, 17	rs2:2-7,16, 17	rd:2-7,16, 17	
AND16	2	0	rs1:2-7,16, 17	rd:2-7,16, 17		
ANDI16	2	4	rs1:2-7,16, 17	rd:2-7,16, 17		1, 2, 3, 4, 7, 8, 15, 16, 31, 32, 63, 64, 128, 255, 32768, 65535
B16	0	10				(-512..511) << 1
BEQZ16	1	7	rs1:2-7,16, 17			(-64..63) << 1
BNEZ16	1	7	rs1:2-7,16, 17			(-64..63) << 1
BREAK16	0	4				0..15
JALR16	5bit:1	0	rs1:5 bit field			
JALRS16	5bit:1	0	rs1:5 bit field			
JRADDIUSP	0	5				(0..31) << 2
JR16	5bit:1	0	rs1:5 bit field			
JRC	5bit:1	0	rs1:5 bit field			
LBU16	2	4	rb:2-7,16,17	rd:2-7,16, 17		-1,0..14
LHU16	2	4	rb:2-7,16,17	rd:2-7,16, 17		(0..15) << 1
LI16	1	7	rd:2-7,16, 17			-1,0..126
LW16	2	4	rb:2-7,16,17	rd:2-7,16, 17		(0..15) << 2
LWM16	2bit list:1	4				(0..15)<<2
LWGP	1	7	rd:2-7,16,17			(-64..63)<<2
LWSP	5bit:1	5	rd:5-bit field			(0..31)<<2
MFHI16	5bit:1	0	rd:5-bit field			
MFLO16	5bit:1	0	rd:5-bit field			
MOVE16	5bit:2	0	rd:5-bit field	rs1:5-bit field		
MOVEP	3	0	rd, re: (5,6),(5,7),(6,7), (4,21),(4,22),(4, 5),(4,6),(4,7)	rt:0,2,7,16-20	rs:0,2,7,16-20	
NOT16	2	0	rs1:2-7,16, 17	rd:2-7,16, 17		
OR16	2	0	rs1:2-7,16, 17	rd:2-7,16, 17		
SB16	2	4	rb:2-7,16,17	rs1:0, 2-7, 17		0..15

Table 5.3 Instruction-Specific Register Specifiers and Immediate Field Values (Continued)

Instruction	Number of Register Fields	Immediate Field Size (bit)	Register 1 Decoded Value	Register 2 Decoded Value	Register 3 Decoded Value	Immediate Field Decoded Value
SDBBP16	0	0				0..15
SH16	2	4	rb:2-7,16,17	rs1:0, 2-7, 17		(0..15) << 1
SLL16	2	3	rs1:2-7,16, 17	rd:2-7,16, 17		1..8 (see encoding tables)
SRL16	2	3	rs1:2-7,16, 17	rd:2-7,16, 17		1..8 (see encoding tables)
SUBU16	3	0	rs1:2-7,16, 17	rs2:2-7,16, 17	rd:2-7,16, 17	
SW16	2	4	rb:2-7,16,17	rs1:0, 2-7, 17		(0..15) << 2
SWSP	5bit:1	5	rs1: 5 bit field			(0..31) << 2
SWM16	2 bit list:1	4				(0..15)<<2
XOR16	2	0	rs1:2-7,16, 17	rd:2-7,16, 17		

5.2 16-bit Instruction Register Set

Many of the 16-bit instructions use 3-bit register specifiers in their binary encodings. The register set used for most of these 3-bit register specifiers is listed in [Table 5.5](#). The register set used for SB16, SH16, SW16 source register is listed in [Table 5.5](#). These register sets are a true subset of the register set available in 32-bit mode; the 3-bit register specifiers can directly access 8 of the 32 registers available in 32-bit mode (which uses 5-bit register specifiers).

In addition, specific instructions in the 16-bit instruction set implicitly reference the stack pointer register (*sp*), global pointer register (*gp*), the return address register (*ra*), the integer multiplier/divider output registers (*HI/LO*) and the program counter (*PC*). Of these, [Table 5.6](#) lists *sp*, *gp* and *ra*. [Table 5.7](#) lists the microMIPS special-purpose registers, including *PC*, *HI* and *LO*.

microMIPS Re-encoded Instructions

The microMIPS also contains some 16-bit instructions that use 5-bit register specifiers. Such 16-bit instructions provide access to all 32 general-purpose registers.

Table 5.4 16-Bit Instruction General-Purpose Registers - \$2-\$7, \$16, \$17

16-Bit Register Encoding ¹	32-Bit MIPS Register Encoding ²	Symbolic Name (From <i>ArchDefs.h</i>)	Description
0	16	s0	General-purpose register
1	17	s1	General-purpose register
2	2	v0	General-purpose register
3	3	v1	General-purpose register
4	4	a0	General-purpose register
5	5	a1	General-purpose register
6	6	a2	General-purpose register
7	7	a3	General-purpose register

1. “0-7” correspond to the register’s 16-bit binary encoding and show how that encoding relates to the MIPS registers. “0-7” never refer to the registers, except within the binary microMIPS instructions. From the assembler, only the MIPS names (\$16, \$17, \$2, etc.) or the symbolic names (s0, s1, v0, etc.) refer to the registers. For example, to access register number 17 in the register file, the programmer references \$17 or s1, even though the micro-MIPS binary encoding for this register is 001.
2. General registers not shown in the above table are not accessible through the 16-bit instruction using 3-bit register specifiers. The Move instruction can access all 32 general-purpose registers.

Table 5.5 SB16, SH16, SW16 Source Registers - \$0, \$2-\$7, \$17

16-Bit Register Encoding ¹	32-Bit MIPS Register Encoding ²	Symbolic Name (From <i>ArchDefs.h</i>)	Description
0	0	zero	Hard-wired Zero
1	17	s1	General-purpose register
2	2	v0	General-purpose register
3	3	v1	General-purpose register
4	4	a0	General-purpose register
5	5	a1	General-purpose register
6	6	a2	General-purpose register
7	7	a3	General-purpose register

1. “0-7” correspond to the register’s 16-bit binary encoding and show how that encoding relates to the MIPS registers. “0-7” never refer to the registers, except within the binary microMIPS instructions. From the assembler, only the MIPS names (\$16, \$17, \$2, etc.) or the symbolic names (s0, s1, v0, etc.) refer to the registers. For example, to access register number 17 in the register file, the programmer references \$17 or s1, even though the micro-MIPS binary encoding for this register is 001.
2. General registers not shown in the above table are not accessible through the 16-bit instructions using 3-bit register specifier. The Move instruction can access all 32 general-purpose registers.

Table 5.6 16-Bit Instruction Implicit General-Purpose Registers

16-Bit Register Encoding	32-Bit MIPS Register Encoding	Symbolic Name (From ArchDefs.h)	Description
Implicit	28	gp	Global pointer register
Implicit	29	sp	Stack pointer register
Implicit	31	ra	Return address register

Table 5.7 16-Bit Instruction Special-Purpose Registers

Symbolic Name	Purpose
PC	Program counter. The PC-relative ADDIU can access this register as an operand.
HI	Contains high-order word of multiply or divide result.
LO	Contains low-order word of multiply or divide result.

5.3 32-Bit Category

5.3.1 New 32-bit instructions

The following table lists the 32-bit instructions introduced in the microMIPS ISA.

Table 5.8 32-bit Instructions introduced within microMIPS

Instruction	Major Opcode Name	Number of Register Fields	Immediate Field Size (bit)	Register Field Width (bit)	Total Size of Other Fields	Empty 0 Field Size (bit)	Minor Opcode Size (bit)	Comment
ADDIUPC	ADDIUPC	1	23	3		0	0	ADDIU PC-Relative
BEQZC	POOL32I	2:5 bit	16	5			0	Branch on Equal to Zero, No Delay Slot
BNEZC	POOL32I	2:5 bit	16	5			0	Branch on Not Equal to Zero, No Delay Slot
JALRS	POOL32A	2:5 bit	0	5			16	Jump and Link Register, Short Delay Slot
JALRS.HB	POOL32A	2:5 bit	0	5			16	Jump and Link Register with Hazard Barrier, Short Delay Slot

Table 5.8 32-bit Instructions introduced within microMIPS

Instruction	Major Opcode Name	Number of Register Fields	Immediate Field Size (bit)	Register Field Width (bit)	Total Size of Other Fields	Empty 0 Field Size (bit)	Minor Opcode Size (bit)	Comment
JALS	JALS32	0	26				0	Jump and Link, Short Delay Slot
JALX	JALX		26	5		0	5	Jump and Link Exchange
LDM	POOL32B	1:5bit	12		5	0	4	Load DoubleWord Multiple
LDP	POOL32B	2:5 bit	12			0	4	Load DoubleWord Pair
LWP	POOL32B	2:5 bit	12		5	0	4	Load Word Pair
LWXS	POOL32A	3:5 bit	0	5	0	1	10	Load Word Indexed, Scale
LWM32	POOL32B	1:5bit	12		5	0	4	Load Word Multiple
SDM	POOL32B	1:5bit	12		5	0	4	Store DoubleWord Multiple
SDP	POOL32B	2:5 bit	12			0	4	Load DoubleWord Pair
SWP	POOL32B	2:5 bit	12			0	4	Load Word Pair
SWM32	POOL32B	1:5bits	12		5	0	4	Store Word Multiple

5.4 New Instructions

This section defines all new instructions introduced with microMIPS. Existing MIPS64 instructions and macros are not covered.

31	26 25	23 22	0
ADDIUPC 011110	rs	Immediate	

6 3 23

Format: ADDIUPC rs, left_shifted_immediate

microMIPS

Purpose: Add Immediate Unsigned Word (PC-Relative)

To add a constant to the program counter.

Description: GPR[translated(rs)] \leftarrow PC + (immediate << 2)

The 23-bit *immediate* is left shifted by two bits, sign-extended and added to the address of the ADDIU instruction. Before the addition, the two lower bits of the instruction address are cleared.

The result of the addition is sign-extended and placed in GPR *rs*.

No integer overflow exception occurs under any circumstances.

Unlike the MIPS16 version of this instruction, the program counter value of the ADDIUPC instruction is always used, even when the ADDIUPC instruction is placed in the delay-slot of a jump or branch instruction.

Restrictions:

The 3-bit register field can only specify GPRs \$2-\$7, \$16, \$17.

If the PC is outside the 32-bit Compatibility Address Space (i.e., bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```
if NotWordValue(PC) then
    UNPREDICTABLE
endif
temp  $\leftarrow$  (PC_GPRLEN-1..2 || 02) + sign_extend(immediate || 02)
GPR[Xlat(rs)]  $\leftarrow$  sign_extend(temp31..0)
```

Exceptions:

None


Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

The use of the ADDIUPC instruction on a MIPS64 processor in which the PC is outside the 32-bit Compatibility Address Space will not produce the expected result. This is because the final PC value is required to be sign-extended from the least-significant 32 bits, and such a value will not generate the correct address if PC is not also a sign-extended value.

The assembler LA (Load Address) pseudo-instruction is implemented as a PC-relative add.

The 25-bit immediate (field shifted by 2 bits) allows addresses within 32MB of the instruction PC location to be generated.

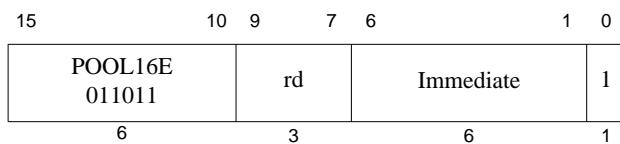

Format: ADDIUR1SP rd, decoded_immediate_value

microMIPS

Purpose: Add Immediate Unsigned Word One Register (16-bit instr size)

To add a constant to a 32-bit integer.

Description: $\text{GPR}[\text{rd}] \leftarrow \text{GPR}[29] + \text{zero_extend}(\text{immediate} \ll 2)$

The 6-bit *immediate* field is first shifted left by two bits and then zero-extended. This amount is added to the 32-bit value in GPR 29 and the 32-bit arithmetic result is sign-extended and placed into GPR *rd*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

If GPR *rs* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp ← GPR[29] + zero_extend(immediate || 02)
GPR[rd] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. This instruction is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

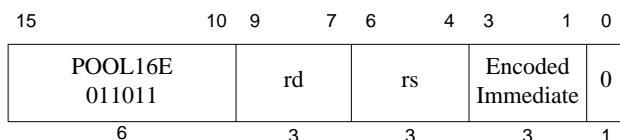

Format: ADDIUR2 rd, rs1, decoded_immediate_value

microMIPS

Purpose: Add Immediate Unsigned Word Two Registers (16-bit instr size)

To add a constant to a 32-bit integer.

Description: $GPR[rd] \leftarrow GPR[rs] + \text{sign_extend}(\text{decoded immediate})$

The encoded immediate field is decoded to obtain the actual immediate value.

The decoded immediate value is sign-extended and then added to the 32-bit value in GPR *rs*, and the 32-bit arithmetic result is sign-extended and placed into GPR *rd*.

No Integer Overflow exception occurs under any circumstances.

Table 5.9 Encoded and Decoded Values of the Immediate Field

Encoded Value of Instr _{3..1} (Decimal)	Encoded Value of Instr _{3..1} (Hex)	Decoded Value of Immediate (Decimal)	Decoded Value of Immediate (Hex)
0	0x0	1	0x0001
1	0x1	4	0x0004
2	0x2	8	0x0008
3	0x3	12	0x000c
4	0x4	16	0x0010
5	0x5	20	0x0014
6	0x6	24	0x0018
7	0x7	-1	0xffff

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

If GPR *rs* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp ← GPR[rs] + sign_extend(decoded immediate)
GPR[rd] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. This instruction is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

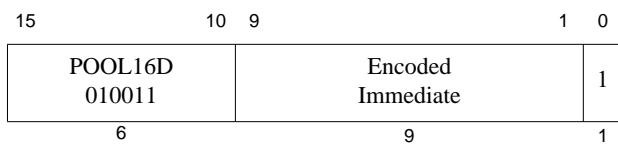**Format:** ADDIUSP decoded_immediate_value**microMIPS****Purpose:** Add Immediate Unsigned Word to Stack Pointer(16-bit instr size)

To add a constant to the stack pointer.

Description: $GPR[29] \leftarrow GPR[29] + \text{sign_extend}(\text{decoded immediate} \ll 2)$

The encoded immediate field is decoded to obtain the actual immediate value.

The actual immediate value is first shifted left by two bits and then sign-extended. This amount is added to the 32-bit value in GPR 29, and the 32-bit arithmetic result is sign-extended and placed into GPR 29.

No Integer Overflow exception occurs under any circumstances.

Table 5.10 Encoded and Decoded Values of Immediate Field

Encoded Value of Instr _{9..1} (Decimal)	Encoded Value of Instr _{9..1} (Hex)	Decoded Value of Immediate (Decimal)	Decoded Value of Immediate (Hex)
0	0x0	256	0x0100
1	0x1	257	0x0101
2	0x2	2	0x0002
3	0x3	3	0x0003
...
254	0xfe	254	0x00fe
255	0xff	255	0x00ff
256	0x100	-256	0xff00
257	0x101	-255	0xff01
...
508	0x1fc	-4	0xffffc
509	0x1fd	-3	0xffffd
510	0x1fe	-258	0xfefe
511	0x1ff	-257	0xfeff

Restrictions:

If GPR 29 does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```
if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp ← GPR[29] + sign_extend(decoded_immediate || 02)
GPR[29] ← sign_extend(temp31..0)
```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. This instruction is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

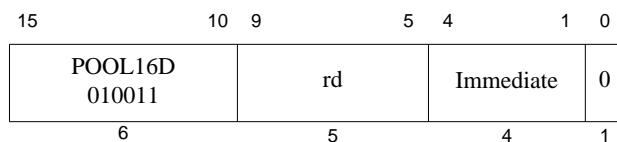

Format: ADDIUS5 rd, decoded_immediate_value

microMIPS

Purpose: Add Immediate Unsigned Word 5-Bit Register Select (16-bit instr size)

To add a constant to a 32-bit integer

Description: $GPR[rd] \leftarrow GPR[rd] + \text{sign_extend}(\text{immediate})$

The 4-bit *immediate* field is sign-extended and then added to the 32-bit value in GPR *rd*. The 32-bit arithmetic result is sign-extended and placed into GPR *rd*.

The 5-bit register select allows this 16-bit instruction to use any of the 32 GPRs as the destination register.

No Integer Overflow exception occurs under any circumstances.

Table 5-1 Encoded and Decoded Values of Signed Immediate Field

Encoded Value of Instr _{4..1} (Decimal)	Encoded Value of Instr _{4..1} (Hex)	Decoded Value of Immediate (Decimal)	Decoded Value of Immediate (Hex)
0	0x0	0	0x0000
1	0x1	1	0x0001
2	0x2	2	0x0002
3	0x3	3	0x0003
4	0x4	4	0x0004
5	0x5	5	0x0005
6	0x6	6	0x0006
7	0x7	7	0x0007
8	0x8	-8	0xffff8
9	0x9	-7	0xffff9
10	0xa	-6	0xffffa
11	0xb	-5	0xffffb
12	0xc	-4	0xffffc
13	0xd	-3	0xffffd
14	0xe	-2	0xffffe
15	0xf	-1	0xfffff

Restrictions:

If GPR *rs* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```
if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp ← GPR[rd] + sign_extend(immediate)
GPR[rd] ← sign_extend(temp31..0)
```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. This instruction is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

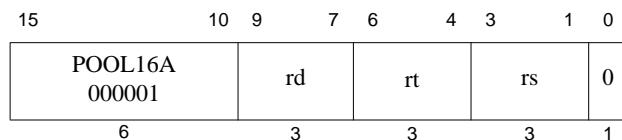

Format: ADDU16 rd, rs, rt

microMIPS

Purpose: Add Unsigned Word (16-bit instr size)

To add 32-bit integers

Description: $GPR[rd] \leftarrow GPR[rs] + GPR[rt]$

The 32-bit word value in GPR *rt* is added to the 32-bit value in GPR *rs*, and the 32-bit arithmetic result is sign-extended and placed into GPR *rd*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

If either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```
if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← GPR[rs] + GPR[rt]
GPR[rd] ← sign_extend(temp31..0)
```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. This instruction is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

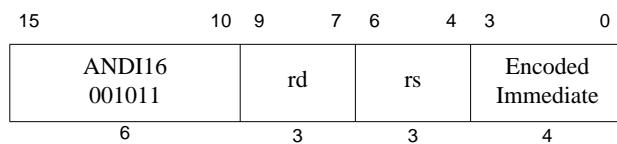

Format: ANDI16 rd, rs, decoded_immediate_value

microMIPS

Purpose: And Immediate (16-bit instr size)

To do a bitwise logical AND with a constant

Description: GPR[rd] \leftarrow GPR[rs] AND decoded immediate value

The encoded immediate field is decoded to obtain the actual immediate value

The decoded immediate is zero-extended to the left and combined with the contents of GPR rs in a bitwise logical AND operation. The result is placed into GPR rd.

Table 5-2 Encoded and Decoded Values of Immediate Field

Encoded Value of Instr _{3..0} (Decimal)	Encoded Value of Instr _{3..0} (Hex)	Decoded Value of Immediate (Decimal)	Decoded Value of Immediate (Hex)
0	0x0	128	0x80
1	0x1	1	0x1
2	0x2	2	0x2
3	0x3	3	0x3
4	0x4	4	0x4
5	0x5	7	0x7
6	0x6	8	0x8
7	0x7	15	0xf
8	0x8	16	0x10
9	0x9	31	0x1f
10	0xa	32	0x20
11	0xb	63	0x3f
12	0xc	64	0x40
13	0xd	255	0xff
14	0xe	32768	0x8000
15	0xf	65535	0xffff

Restrictions:


The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation:

```
GPR[rd] ← GPR[rs] and zero_extend(decoded immediate)
```

Exceptions:

None

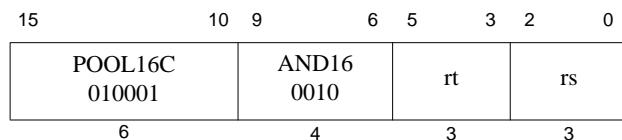

Format: AND16 rt, rs

microMIPS

Purpose: And (16-bit instr size)

To do a bitwise logical AND

Description: GPR[rt] \leftarrow GPR[rs] AND GPR[rt]

The contents of GPR rs are combined with the contents of GPR rt in a bitwise logical AND operation. The result is placed into GPR rt.

Restrictions:


The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation:

GPR[rt] \leftarrow GPR[rs] and GPR[rt]

Exceptions:

None

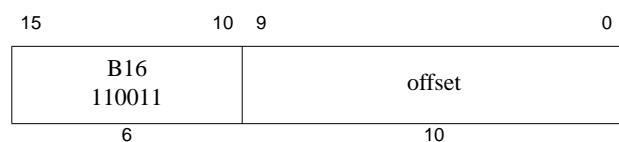**Format:** B16 offset**microMIPS****Purpose:** Unconditional Branch (16-bit instr size)

To do an unconditional branch

Description: branch

A 11-bit signed offset (the 10-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:


```
I:     target_offset ← sign_extend(offset || 01)
I+1:   PC ← PC + target_offset
```

Exceptions:

None

Programming Notes:

With the 11-bit signed instruction offset, the branch range is ± 1 Kbytes. Use jump (J) or jump register (JR) or 32-bit branch instructions to branch to addresses outside this range.

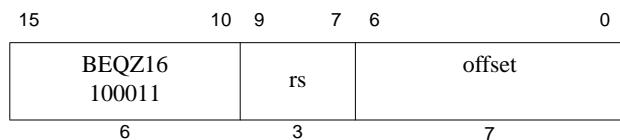

Format: BEQZ16 rs, offset

microMIPS

Purpose: Branch on Equal to Zero (16-bit instr size)

To compare a GPR to zero then do a PC-relative conditional branch

Description: if GPR[rs] = 0 then branch

A 8-bit signed offset (the 7-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.

If the contents of GPR *rs* equals zero, branch to the effective target address after the instruction in the delay slot is executed.

Restrictions:

The 3-bit register field can only specify GPRs \$2-\$7, \$16, \$17.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I:      target_offset ← sign_extend(offset || 0)
              condition ← (GPR[rs] == 0)
I+1:    if condition then
                  PC ← PC + target_offset
              endif
  
```

Exceptions:

None

Programming Notes:

With the 8-bit signed instruction offset, the conditional branch range is ± 64 Bytes. Use 32-bit branch, jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	16 15	0
POOL32I 010000	BEQZC 00111	rs	offset	

6 5 5 16

Format: BEQZC rs, offset

microMIPS

Purpose: Branch on Equal to Zero, Compact

To test a GPR then do a PC-relative conditional branch.

Description: if (GPR[rs] = 0) then branch

The 16-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR *rs* is equal to zero, the program branches to the target address, with no delay slot instruction.

Restrictions:Processor operation is **UNPREDICTABLE** if the instruction is placed in a delay slot of a branch or jump.**Operation:**

```
I:     tgt_offset ← sign_extend(offset || 0)
      condition ← (GPR[rs] = 0GPRLEN)
      if condition then
          PC ← PC + 4 + tgt_offset
      endif
```

Exceptions:

None

Programming Notes:

Unlike most MIPS ‘branch’ instructions, BEQZC does not have a delay slot.

31	26 25	21 20	16 15	0
POOL32I 010000	BGEZALS 10011	rs	offset	

6 5 5 16

Format: BGEZALS rs, offset

microMIPS

Purpose: Branch on Greater Than or Equal to Zero and Link, Short Delay-Slot

To test a GPR then do a PC-relative conditional procedure call

Description: if $GPR[rs] \geq 0$ then procedure_call

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* are greater than or equal to zero (sign bit is 0), branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**The delay-slot instruction must be 16-bits in size. Processor operation is **UNPREDICTABLE** if a 32-bit instruction is placed in the delay slot of BGEZAL.Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.GPR 31 must not be used for the source register *rs*, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by reexecuting the branch when an exception occurs in the branch delay slot.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] ≥ 0GPRLEN
      GPR[31] ← PC + 6
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump and link (JAL) or jump and link register (JALR) instructions for procedure calls to addresses outside this range.

BGEZALS r0, offset, expressed as BAL offset, is the assembly idiom used to denote a PC-relative branch and link. BAL is used in a manner similar to JAL, but provides PC-relative addressing and a more limited target PC range.

31	26 25	21 20	16 15	0
POOL32I 010000	BLTZALS 10001	rs	offset	

6 5 5 16

Format: BLTZALS rs, offset

microMIPS

Purpose: Branch on Less Than Zero and Link, Short Delay-Slot

To test a GPR then do a PC-relative conditional procedure call

Description: if GPR[rs] < 0 then procedure_call

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* are less than zero (sign bit is 1), branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**The delay-slot instruction must be 16-bits in size. Processor operation is **UNPREDICTABLE** if a 32-bit instruction is placed in the delay slot of BLTZAL.GPR 31 must not be used for the source register *rs*, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by reexecuting the branch when an exception occurs in the branch delay slot.Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**


```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] < 0GPRLEN
      GPR[31] ← PC + 6
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump and link (JAL) or jump and link register (JALR) instructions for procedure calls to addresses outside this range.

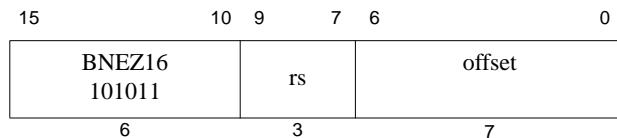

Format: BNEZ16 rs, offset

microMIPS

Purpose: Branch on Not Equal to Zero (16-bit instr size)

To compare a GPR to zero then do a PC-relative conditional branch

Description: if GPR[rs] != 0 then branch

A 8-bit signed offset (the 7-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.

If the contents of GPR *rs* does not equal zero, branch to the effective target address after the instruction in the delay slot is executed.

Restrictions:

The 3-bit register field can only specify GPRs \$2-\$7, \$16, \$17.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I:      target_offset ← sign_extend(offset || 0)
              condition ← (GPR[rs] != 0)
I+1:    if condition then
                  PC ← PC + target_offset
              endif
  
```

Exceptions:

None

Programming Notes:

With the 8-bit signed instruction offset, the conditional branch range is ± 64 Bytes. Use 32-bit branch, jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	16 15	0
POOL32I 010000	BNEZC 00101	rs	offset	

6 5 5 16

Format: BNEZC rs, offset**microMIPS****Purpose:** Branch on Not Equal to Zero, Compact

To test a GPR then do a PC-relative conditional branch.

Description: if ($\text{GPR}[\text{rs}] \neq 0$) then branch

The 16-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR *rs* is not equal to zero, the program branches to the target address, with no delay slot instruction.

Restrictions:Processor operation is **UNPREDICTABLE** if the instruction is placed in a delay slot of a branch or jump.**Operation:**


```
I:     tgt_offset ← sign_extend(offset || 0)
      condition ← ( $\text{GPR}[\text{rs}] \neq 0^{\text{GPRLEN}}$ )
      if condition then
          PC ← PC + 4 + tgt_offset
      endif
```

Exceptions:

None

Programming Notes:

Unlike most MIPS ‘branch’ instructions, BNEZC does not have a delay slot.

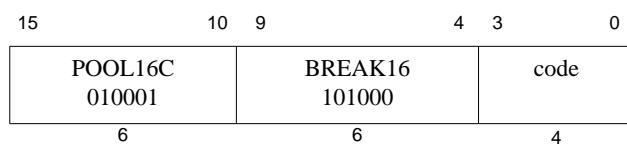

Format: BREAK16

microMIPS

Purpose: Breakpoint

To cause a Breakpoint exception

Description:

A breakpoint exception occurs, immediately and unconditionally transferring control to the exception handler. The *code* field is available for use as software parameters, but is retrieved by the exception handler only by loading the contents of the memory word containing the instruction.

Restrictions:


None

Operation:

SignalException(Breakpoint)

Exceptions:

Breakpoint

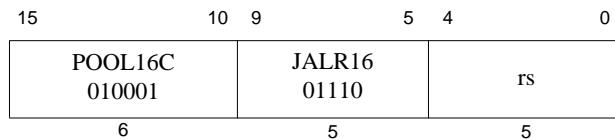**Format:** JALR16 rs**microMIPS****Purpose:** Jump and Link Register (16-bit instr size)

To execute a procedure call to an instruction address in a register

Description: GPR[31] \leftarrow return_addr, PC \leftarrow GPR[rs]

Place the return address link in GPR r31. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

For processors that do not implement the MIPS64 ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

For processors that do implement the MIPS64 ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Set the *ISA Mode* bit to the value in GPR rs bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

Restrictions:The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of JALR16.

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR rs.

For processors which implement MIPS64 and if the ISAMode bit of the target is MIPS64 (bit 0 of GPR rs is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS64 ISA, if the intended target ISAMode is MIPS64 (bit 0 of GPR rs is zero), an Address Error exception occurs when the jump target is fetched as an instruction.


Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I: temp  $\leftarrow$  GPR[rs]
      GPR[31]  $\leftarrow$  PC + 6
I+1:if ConfigISA = 1 then
      PC  $\leftarrow$  temp
    else
      PC  $\leftarrow$  tempGPRLEN-1..1 || 0
      ISAMode  $\leftarrow$  temp0
    endif
  
```

Exceptions:

None

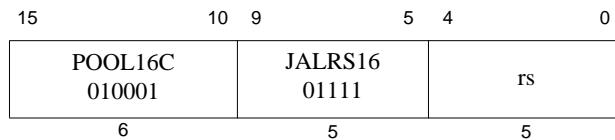**Format:** JALRS16 rs**microMIPS****Purpose:** Jump and Link Register, Short Delay-Slot(16-bit instr size)

To execute a procedure call to an instruction address in a register

Description: GPR[31] \leftarrow return_addr, PC \leftarrow GPR[rs]Place the return address link in GPR *r31*. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.*For processors that do not implement the MIPS64 ISA:*

- Jump to the effective target address in GPR *rs*. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

For processors that do implement the MIPS64 ISA:

- Jump to the effective target address in GPR *rs*. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Set the *ISA Mode* bit to the value in GPR *rs* bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

Restrictions:The delay-slot instruction must be 16-bits in size. Processor operation is **UNPREDICTABLE** if a 32-bit instruction is placed in the delay slot of JALRS16.If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR *rs*.For processors which implement MIPS64 and if ISAMode bit of the target is MIPS64 (bit 0 of GPR *rs* is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.For processors that do not implement MIPS64 ISA, if the target ISAMode is MIPS64 (bit 0 of GPR *rs* is zero), an Address Error exception occurs when the jump target is fetched as an instruction.Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I: temp  $\leftarrow$  GPR[rs]
      GPR[31]  $\leftarrow$  PC + 4
I+1:if ConfigISA = 1 then
      PC  $\leftarrow$  temp
    else
      PC  $\leftarrow$  tempGPRLEN-1..1 || 0
      ISAMode  $\leftarrow$  temp0
    endif
  
```

Exceptions:

None

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	JALRS 0100111100	POOL32AXf 111100	6

Format: JALRS rs (rt = 31 implied)
JALRS rt, rs

microMIPS
microMIPS

Purpose: Jump and Link Register, Short Delay Slot

To execute a procedure call to an instruction address in a register

Description: GPR[rt] \leftarrow return_addr, PC \leftarrow GPR[rs]

Place the return address link in GPR rt. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

For processors that do not implement the MIPS64 ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

For processors that do implement the MIPS64 ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Set the *ISA Mode* bit to the value in GPR rs bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

Restrictions:

The delay-slot instruction must be 16-bits in size. Processor operation is **UNPREDICTABLE** if a 32-bit instruction is placed in the delay slot of JALRS.

Register specifiers rs and rt must not be equal, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by re-executing the branch when an exception occurs in the branch delay slot.

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR rs.

For processors which implement MIPS64 and if if ISAMode bit of the target is MIPS64 (bit 0 of GPR rs is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS64 ISA, if the intended target ISAMode is MIPS64 (bit 0 of GPR rs is zero), an Address Error exception occurs when the jump target is fetched as an instruction.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I: temp  $\leftarrow$  GPR[rs]
      GPR[rt]  $\leftarrow$  PC + 6
I+1:if Config1CA = 0 then
          PC  $\leftarrow$  temp
      else

```

```
PC ← tempGPRLEN-1..1 || 0
ISAMode ← temp0
endif
```

Exceptions:

None

Programming Notes:

This branch-and-link instruction can select a register for the return link; other link instructions use GPR 31. The default register for GPR *rd*, if omitted in the assembly language instruction, is GPR 31.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rd	rs	JALRS.HB 0101111100	POOL32AXf 111100	6

Format: JALRS.HB rs (rt = 31 implied)
JALRS.HB rt, rs

microMIPS
microMIPS

Purpose: Jump and Link Register with Hazard Barrier, Short Delay-Slot

To execute a procedure call to an instruction address in a register and clear all execution and instruction hazards

Description: GPR[rt] \leftarrow return_addr, PC \leftarrow GPR[rs], clear execution and instruction hazards

Place the return address link in GPR rt. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

For processors that do not implement the MIPS64 ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

For processors that do implement the MIPS64 ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Set the *ISA Mode* bit to the value in GPR rs bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

JALRS.HB implements a software barrier that resolves all execution and instruction hazards created by Coprocessor 0 state changes (for Release 2 implementations, refer to the SYNCI instruction for additional information on resolving instruction hazards created by writing the instruction stream). The effects of this barrier are seen starting with the instruction fetch and decode of the instruction at the PC to which the JALRS.HB instruction jumps. An equivalent barrier is also implemented by the ERET instruction, but that instruction is only available if access to Coprocessor 0 is enabled, whereas JALRS.HB is legal in all operating modes.

This instruction clears both execution and instruction hazards. Refer to the [EHB](#) instruction description for the method of clearing execution hazards alone.

Restrictions:

The delay-slot instruction must be 16-bits in size. Processor operation is **UNPREDICTABLE** if a 32-bit instruction is placed in the delay slot of JALRS.HB.

Register specifiers rs and rd must not be equal, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by re-executing the branch when an exception occurs in the branch delay slot.

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR rs.

For processors which implement MIPS64 and if ISAMode bit of the target is MIPS64 (bit 0 of GPR rs is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS64 ISA, if the intended target ISAMode is MIPS64 (bit 0 of GPR rs is zero), an Address Error exception occurs when the jump target is fetched as an instruction.

After modifying an instruction stream mapping or writing to the instruction stream, execution of those instructions has **UNPREDICTABLE** behavior until the instruction hazard has been cleared with JALR.HB, JALRS.HB, JR.HB, ERET, or DERET. Further, the operation is **UNPREDICTABLE** if the mapping of the current instruction stream is modified.

JALRS.HB does not clear hazards created by any instruction that is executed in the delay slot of the JALRS.HB. Only hazards created by instructions executed before the JALR.HB are cleared by the JALRS.HB.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I: temp ← GPR[rs]
      GPR[rt] ← PC + 6
I+1:if Config1CA = 0 then
      PC ← temp
    else
      PC ← tempGPRLEN-1..1 || 0
      ISAMode ← temp0
    endif
    ClearHazards()
  
```

Exceptions:

None

Programming Notes:

This branch-and-link instruction can select a register for the return link; other link instructions use GPR 31. The default register for GPR *rt*, if omitted in the assembly language instruction, is GPR 31.

This instruction implements the final step in clearing execution and instruction hazards before execution continues. A hazard is created when a Coprocessor 0 or TLB write affects execution or the mapping of the instruction stream, or after a write to the instruction stream. When such a situation exists, software must explicitly indicate to hardware that the hazard should be cleared. Execution hazards alone can be cleared with the EHB instruction. Instruction hazards can only be cleared with a JR.HB, JALR.HB, JALRS.HB or ERET instruction. These instructions cause hardware to clear the hazard before the instruction at the target of the jump is fetched. Note that because these instructions are encoded as jumps, the process of clearing an instruction hazard can often be included as part of a call (JALR[S][16]) or return (JR) sequence, by simply replacing the original instructions with the HB equivalent.

Example: Clearing hazards due to an ASID change

```

/*
 * Code used to modify ASID and call a routine with the new
 * mapping established.
 *
 * a0 = New ASID to establish
 * a1 = Address of the routine to call
 */
    mfc0    v0, C0_EntryHi      /* Read current ASID */
    li      v1, ~M_EntryHiASID /* Get negative mask for field */
    and    v0, v0, v1          /* Clear out current ASID value */
    or     v0, v0, a0          /* OR in new ASID value */
    mtc0    v0, C0_EntryHi      /* Rewrite EntryHi with new ASID */
    jalr.hb a1                  /* Call routine, clearing the hazard */
    nop
  
```

31	26 25	0
JALS32 011101	instr_index	26

Format: JALS target**microMIPS****Purpose:** Jump and Link, Short Delay Slot

To execute a procedure call within the current 128 MB-aligned region

Description:

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, at which location execution continues after a procedure call.

This is a PC-region branch (not PC-relative); the effective target address is in the “current” 128 MB-aligned region. The low 27 bits of the target address is the *instr_index* field shifted left 1 bits. The remaining upper bits are the corresponding bits of the address of the instruction in the delay slot (not the branch itself).

Jump to the effective target address. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself.

Restrictions:

The delay-slot instruction must be 16-bits in size. Processor operation is **UNPREDICTABLE** if a 32-bit instruction is placed in the delay slot of JALS.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

I: GPR[31] \leftarrow PC + 6
I+1: PC \leftarrow PC_{GPRLEN-1..27} || instr_index || 0¹


Exceptions:

None

Programming Notes:

Forming the branch target address by catenating PC and index bits rather than adding a signed offset to the PC is an advantage if all program code addresses fit into a 128 MB region aligned on a 128 MB boundary. It allows a branch from anywhere in the region to anywhere in the region, an action not allowed by a signed relative offset.

This definition creates the following boundary case: When the branch instruction is in the last word of a 128 MB region, it can branch only to the following 128 MB region containing the branch delay slot.

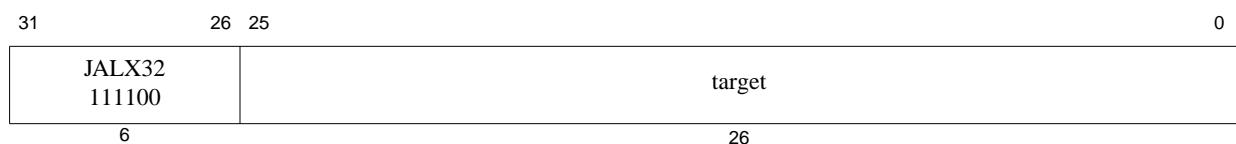**Format:** JALX target**microMIPS****Purpose:** Jump and Link Exchange (microMIPS Format)

To execute a procedure call within the current 256 MB-aligned region and change the ISA Mode from microMIPS to 32-bit MIPS.

Description:

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, at which location execution continues after a procedure call. The value stored in GPR 31 bit 0 reflects the current value of the *ISA Mode* bit.

This is a PC-region branch (not PC-relative); the effective target address is in the “current” 256 MB-aligned region. The low 26 bits of the target address is the *target* field shifted left 2 bits. The remaining upper bits are the corresponding bits of the address of the instruction following the branch (not the branch itself).

Jump to the effective target address, toggling the *ISA Mode* bit. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself.

Restrictions:

The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of JALX.

Processor operation is UNPREDICTABLE if a branch or jump instruction is placed in the delay slot of a jump.

If the MIPS64 ISA is not implemented, a Reserved Instruction Exception is initiated.

Operation:

```

I:      GPR[31] ← (PC + 8)GPRLEN-1..1 || ISAMode
I+1:    PC ← PCGPRLEN-1..28 || target || 02
          ISAMode ← (not ISAMode)
  
```


Exceptions:

None

Programming Notes:

Forming the jump target address by concatenating PC and the 26-bit target address rather than adding a signed *offset* to the PC is an advantage if all program code addresses fit into a 256 MB region aligned on a 256 MB boundary. It allows a jump to anywhere in the region from anywhere in the region which a signed relative *offset* would not allow.

This definition creates the boundary case where the jump instruction is in the last word of a 256 MB region and can therefore jump only to the following 256 MB region containing the following instruction.

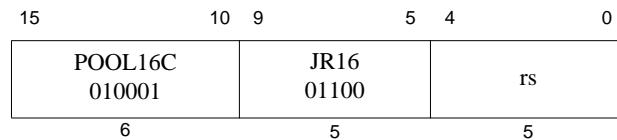**Format:** JR16 rs**microMIPS****Purpose:** Jump Register (16-bit instr size)

To execute a branch to an instruction address in a register

Description: $PC \leftarrow GPR[rs]$ Jump to the effective target address in GPR *rs*. Execute the instruction following the jump, in the branch delay slot, before jumping.For processors that implement MIPS64 ISA, set the *ISA Mode* bit to the value in GPR *rs* bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one**Restrictions:**If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR *rs*.For processors which implement MIPS64 and the ISAMode bit of the target address is MIPS64 (bit 0 of GPR *rs* is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.For processors that do not implement MIPS64 ISA, if the intended target ISAMode is MIPS64 (bit 0 of GPR *rs* is zero), an Address Error exception occurs when the jump target is fetched as an instruction.Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**


```

I: temp ← GPR[rs]
I+1:if Config3ISA = 1 then
        PC ← temp
    else
        PC ← tempGPRLEN-1..1 || 0
        ISAMode ← temp0
    endif

```

Exceptions:

None

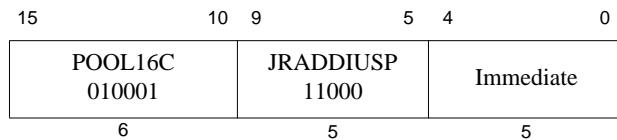**Format:** JRADDIUSP decoded_immediate**microMIPS****Purpose:** Jump Register, Adjust Stack Pointer (16-bit)

To execute a branch to an instruction address in a register and adjust stack pointer

Description: $PC \leftarrow GPR[ra]; SP \leftarrow SP + \text{zero_extend}(\text{Immediate} \ll 2)$

The program unconditionally jumps to the address specified in GPR 31. If MIPS64 is implemented, the instruction sets the *ISA Mode* bit to the value in GPR 31 bit 0.

Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

The 5-bit *immediate* field is first shifted left by two bits and then zero-extended. This amount is then added to the 32-bit value of GPR 29 and the 32-bit arithmetic result is sign-extended and placed into GPR 29. No Integer Overflow exception occurs under any circumstances for the update of GPR 29.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR *rs*.

For processors which implement MIPS64 and the ISAMode bit of the target address is MIPS64 (bit 0 of GPR *rs* is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS64 ISA, if the intended target ISAMode is MIPS64 (bit 0 of GPR *rs* is zero), an Address Error exception occurs when the jump target is fetched as an instruction.

If GPR 29 does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

I:
    PC ← GPR[31]GPRLEN-1..1 || 0
    if ( Config3ISA > 1 )
        ISAMode ← GPR[31]0
    endif
I+1:
    if NotWordValue(GPR[29]) then
        UNPREDICTABLE
    endif
    temp ← GPR[29] + zero_extend(immediate || 02)
    GPR[29] ← sign_extend(temp31..0)


```

Exceptions:

None.

Programming Notes:

Unlike most MIPS “jump” instructions, JRADDIUSP does not have a delay slot.

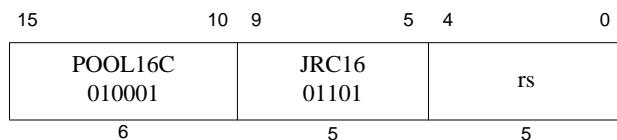**Format:** JRC rs**microMIPS****Purpose:** Jump Register, Compact (16-bit)

To execute a branch to an instruction address in a register

Description: $\text{PC} \leftarrow \text{GPR}[rs]$

The program unconditionally jumps to the address specified in GPR *rs*, with no delay slot instruction. If MIPS64 is implemented, the instruction sets the *ISA Mode* bit to the value in GPR *rs* bit 0.

If MIPS64 is implemented, bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

Restrictions:

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 of GPR *rs*.

For processors which implement MIPS64 and the ISAMode bit of the target address is MIPS64 (bit 0 of GPR *rs* is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS64 ISA, if the intended target ISAMode is MIPS64 (bit 0 of GPR *rs* is zero), an Address Error exception occurs when the jump target is fetched as an instruction.

Operation:


```
I: PC ← GPR[rs]GPRLEN-1..1 || 0
    if ( Config3ISA > 1 )
        ISAMode ← GPR[rs1]0
    endif
```

Exceptions:

None.

Programming Notes:

Unlike most MIPS “jump” instructions, JRC does not have a delay slot.

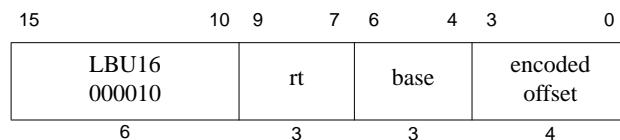

Format: LBU16 rt, decoded_offset(base)

microMIPS

Purpose: Load Byte Unsigned (16-bit instr size)

To load a byte from memory as an unsigned value

Description: GPR[rt] \leftarrow memory[GPR[base] + decoded_offset]

The encoded offset field is decoded to get the actual offset value. This decoded value is added to the contents of base register to create the effective address. Table 5.11 shows the encoded and decode values of the offset field.

Table 5.11 Offset Field Encoding Range -1, 0..14

Encoded Input (Hex)	Decoded Value (Decimal)
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
a	10
b	11
c	12
d	13
e	14
f	-1

The contents of the 8-bit byte at the memory location specified by the effective address are fetched, zero-extended, and placed in GPR *rt*. The 4-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation:

```
decoded_offset  $\leftarrow$  Decode(encoded_offset)
vAddr  $\leftarrow$  sign_extend(decoded_offset) + GPR[base]
```

```
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory (CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor BigEndianCPU3
GPR[rt] ← zero_extend(memdoubleword7+8*byte..8*byte)
```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	reglist	base	LDM 0111	offset	

6 5 5 4 12

Format: LDM {sregs, } {ra}, offset(base)

microMIPS

Purpose: Load Doubleword Multiple

To load a sequence of consecutive doublewords from memory

Description: {GPR[16], {GPR[17], {GPR[18], {GPR[19], {GPR[20], {GPR[21], {GPR[22], {GPR[23], {GPR[30]} }}}}}}}}{GPR[31]} ←
memory[GPR[base]+offset], ..., memory[GPR[base]+offset+8*(fn(reglist))]

The contents of consecutive 64-bit words at the memory location specified by the naturally aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in the GPRs defined by *reglist*. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The following table shows the encoding of the *reglist* field.

reglist Encoding (Binary)	List of Registers Loaded
0 0 0 0 1	GPR[16]
0 0 0 1 0	GPR[16], GPR[17]
0 0 0 1 1	GPR[16], GPR[17], GPR[18]
0 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19]
0 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20]
0 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21]
0 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22]
0 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23]
0 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30]
1 0 0 0 0	GPR[31]
1 0 0 0 1	GPR[16], GPR[31]
1 0 0 1 0	GPR[16], GPR[17], GPR[31]
1 0 0 1 1	GPR[16], GPR[17], GPR[18], GPR[31]
1 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[31]
1 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[31]
1 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[31]
1 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[31]
1 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[31]
1 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30], GPR[31]

<i>reglist</i> Encoding (Binary)	List of Registers Loaded
All other combinations	Reserved

The register numbers and the effective addresses are correlated using the order listed in the table, starting with the left-most register on the list and ending with the right-most register on the list. The effective address is incremented for each subsequent register on the list.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be naturally aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of the instruction is **UNDEFINED**, if *base* is included in *reglist*. Reason for this is to allow restartability of the operation if an interrupt or exception has aborted the operation in the middle.

The behavior of this instruction is **UNDEFINED**, if it is placed in a delay slot of a jump or branch.

Operation:

```

if (Are64bitOperationsEnabled() then
    vAddr ← sign_extend(offset) + GPR[base]
    if vAddr2..0 ≠ 03 then
        SignalException(AddressError)
    endif
    for i←0 to fn(reglist)
        (pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
        memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
        GPR[gpr(reglist,i)] ← memdoubleword
        vAddr ← vAddr + 8
    endfor
else
    SignalException(ReservedInstruction)
endif

function fn(list)
    fn ← number of entries in list - 1
endfunction

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction, Watch

Programming Notes:

This instruction executes for a variable number of cycles and performs a variable number of loads from memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	rd	base	LDP 0100	offset	

6 5 5 4 12

Format: LDP rd, offset(base)

microMIPS

Purpose: Load Doubleword Pair

To load two consecutive doublewords from memory

Description: GPR[rd], GPR[rd+1] \leftarrow memory[GPR[base] + offset]

The contents of the two consecutive 64-bit words at the memory location specified by the aligned effective address are fetched and placed in GPR *rd* and (*rd*+1). The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be naturally aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of the instructions is **UNDEFINED** if *rd* equals \$31.

The behavior of the instruction is **UNDEFINED**, if *base* and *rd* are the same. Reason for this is to allow restartability of the operation if an interrupt or exception has aborted the operation in the middle.

The behavior of this instruction is **UNDEFINED**, if it is placed in a delay slot of a jump or branch.

Operation:

```

if (Are64bitOperationsEnabled() then
    vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
    if vAddr2..0  $\neq$  03 then
        SignalException(AddressError)
    endif
    (pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)  $\leftarrow$ 
    memdoubleword  $\leftarrow$  LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)  $\leftarrow$ 
    GPR[rd]  $\leftarrow$  memdoubleword
    vAddr  $\leftarrow$  sign_extend(offset) + GPR[base] + 8
    (pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)  $\leftarrow$ 
    memdoubleword  $\leftarrow$  LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)  $\leftarrow$ 
    GPR[rd+1]  $\leftarrow$  memdoubleword)
else
    SignalException(ReservedInstruction)
endif


```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction, Watch

Programming Notes:

This instruction may execute for a variable number of cycles and performs two loads from memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

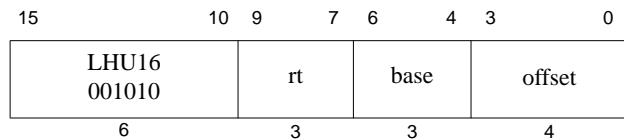

Format: LHU16 rt, left_shifted_offset(base)

microMIPS

Purpose: Load Halfword Unsigned (16-bit instr size)

To load a halfword from memory as an unsigned value

Description: $\text{GPR}[rt] \leftarrow \text{memory}[\text{GPR}[base] + (\text{offset} \times 2)]$

The contents of the 16-bit halfword at the memory location specified by the aligned effective address are fetched, zero-extended, and placed in GPR *rt*. The 4-bit unsigned *offset* is left shifted by one bit and then added to the contents of GPR *base* to form the effective address.

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 0) + GPR[base]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword ← LoadMemory (CCA, HALFWORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[rt] ← zero_extend(memdoubleword15+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Watch

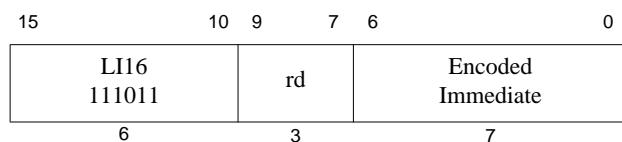**Format:** LI16 rd, decoded_immediate**microMIPS****Purpose:** Load Immediate Word (16-bit instr size)

To load a 6-bit constant into a register.

Description: GPR[rd] \leftarrow decoded_immediate

The 7-bit encoded Immediate field is decoded to obtain the actual immediate value. Table 5.12 shows the encoded values of the Immeidate field and the actual immediate values.

Table 5.12 LI16 -1, 0..126 Immediate Field Encoding Range

Encoded Input (Hex)	Decoded Value (Decimal)
0	0
1	1
2	2
3	3
...	...
7e	126
7f	-1

The actual decoded immediate value is sign-extended and placed into GPR *rd*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:


The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation:

```
decoded_immediate  $\leftarrow$  Decode(encoded_immediate)
temp  $\leftarrow$  sign_extend(decoded_immediate)
GPR[rd]  $\leftarrow$  temp63..0
```

Exceptions:

None

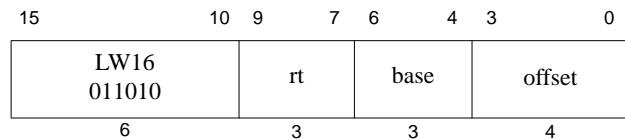

Format: LW16 rt, left_shifted_offset(base)

microMIPS

Purpose: Load Word (16-bit instr size)

To load a word from memory as a signed value

Description: $\text{GPR}[rt] \leftarrow \text{memory}[\text{GPR}[\text{base}] + (\text{offset} \times 4)]$

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in GPR *rt*. The 4-bit signed *offset* is left shifted by two bits and then is added to the contents of GPR *base* to form the effective address.

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset || 02) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

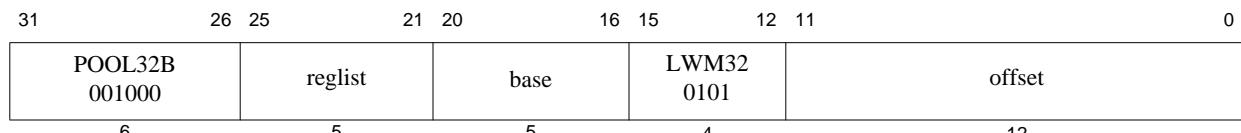

Format: LWM32 {sre16, } {ra}, offset(base)

microMIPS

Purpose: Load Word Multiple

To load a sequence of consecutive words from memory

Description: {GPR[16], {GPR[17], {GPR[18], {GPR[19], {GPR[20], {GPR[21], {GPR[22], {GPR[23], {GPR[30]} }}}}}}}}{GPR[31]} ←
memory[GPR[base]+offset], ..., memory[GPR[base]+offset+4*(fn(reglist))]

The contents of consecutive 32-bit words at the memory location specified by the 32-bit aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in the GPRs defined by *reglist*. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The following table shows the encoding of the *reglist* field.

reglist Encoding (binary)	List of Registers Loaded
0 0 0 0 1	GPR[16]
0 0 0 1 0	GPR[16], GPR[17]
0 0 0 1 1	GPR[16], GPR[17], GPR[18]
0 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19]
0 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20]
0 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21]
0 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22]
0 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23]
0 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30]
1 0 0 0 0	GPR[31]
1 0 0 0 1	GPR[16], GPR[31]
1 0 0 1 0	GPR[16], GPR[17], GPR[31]
1 0 0 1 1	GPR[16], GPR[17], GPR[18], GPR[31]
1 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[31]
1 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[31]
1 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[31]
1 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[31]
1 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[31]

reglist Encoding (binary)	List of Registers Loaded
1 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30], GPR[31]
All other combinations	Reserved

The register numbers and the effective addresses are correlated using the order listed in the table, starting with the left-most register on the list and ending with the right-most register on the list. The effective address is incremented for each subsequent register on the list.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be 32-bit aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of the instruction is **UNPREDICTABLE**, if *base* is included in *reglist*. Reason for this is to allow restartability of the operation if an interrupt or exception has aborted the operation in the middle.

The behavior of this instruction is **UNPREDICTABLE**, if it is placed in a delay slot of a jump or branch.

Operation:

```


vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
for i←0 to fn(reglist)
    (pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
    pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
    memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
    byte ← vAddr2..0 xor (BigEndianCPU || 02)
    GPR[gpr(reglist,i)] ← sign_extend(memdoubleword31+8*byte..8*byte)
    vAddr ← vAddr + 4
endfor

function fn(list)
    fn ← (number of entries in list) - 1
endfunction

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

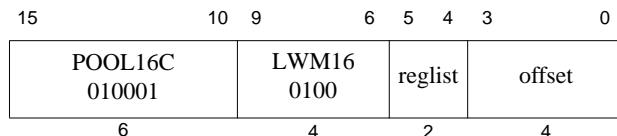

Format: LWM16 s0, {s1, {s2, {s3, }}} ra, left_shifted_offset(sp)

microMIPS

Purpose: Load Word Multiple (16-bit)

To load a sequence of consecutive words from memory

Description: GPR[16], {GPR[17], {GPR[18], {GPR[19], }}} GPR[31] ← memory[GPR[29]+(offset<<2)],...,memory[GPR[19]+(offset<<2)+4*(fn(reglist))]

The contents of consecutive 32-bit words at the memory location specified by the 32-bit aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in the GPRs defined by *reglist*. The 4-bit unsigned *offset* is first left shifted by two bits and then added to the contents of GPR *sp* to form the effective address.

The following table shows the encoding of the *reglist* field.

reglist Encoding (binary)	List of Registers Loaded
0 0	GPR[16], GPR[31]
0 1	GPR[16], GPR[17], GPR[31]
1 0	GPR[16], GPR[17], GPR[18], GPR[31]
1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[31]

The register numbers and the effective addresses are correlated using the order listed in the table, starting with the left-most register on the list and ending with the right-most register on the list. The effective address is incremented for each subsequent register on the list.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be 32-bit aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of this instruction is **UNPREDICTABLE**, if it is placed in a delay slot of a jump or branch.

Operation:

```

vAddr ← zero_extend(offset || 02) + GPR[sp]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
for i←0 to fn(reglist)
    (pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
    pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
    memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
    byte ← vAddr2..0 xor (BigEndianCPU || 02)
    GPR[gpr(reglist, i)] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

```
vAddr ← vAddr + 4
endfor

function fn(list)
    fn ← number of entries in list - 1
endfunction
```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	rd	base	LWP 0001	offset	

Format: LWP rd, offset(base)

microMIPS

Purpose: Load Word Pair

To load two consecutive words from memory

Description: GPR[rd], GPR[rd+1] \leftarrow memory[GPR[base] + offset]

The contents of the two consecutive 32-bit words at the memory location specified by the 32-bit aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in GPR *rd* and (*rd*+1). The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be 32-bit aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of the instructions is **UNPREDICTABLE** if *rd* equals r31.

The behavior of the instruction is **UNPREDICTABLE**, if *base* and *rd* are the same. Reason for this is to allow restartability of the operation if an interrupt or exception has aborted the operation in the middle.

The behavior of this instruction is **UNPREDICTABLE**, if it is placed in a delay slot of a jump or branch.

Operation:

```


vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr1..0  $\neq$  02 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword  $\leftarrow$  LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
GPR[rd]  $\leftarrow$  sign_extend(memdoubleword31+8*byte..8*byte)

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base] + 4
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword  $\leftarrow$  LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
GPR[rd+1]  $\leftarrow$  sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

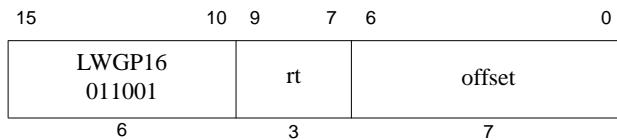

Format: LWGP rt, left_shifted_offset(gp)

microMIPS

Purpose: Load Word from Global Pointer (16-bit instr size)

To load a word from memory as a signed value

Description: $GPR[rt] \leftarrow \text{memory}[GPR[28] + (\text{offset} \times 4)]$

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in GPR *rt*. The 7-bit signed *offset* is left shifted by two bits and then added to the contents of GPR 28 to form the effective address.

Restrictions:

The 3-bit register field can only specify GPRs \$2-\$7, \$16, \$17.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset || 02) + GPR[28]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

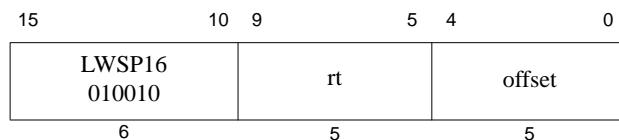

Format: LWSP rt, left_shifted_offset(sp)

microMIPS

Purpose: Load Word from Stack Pointer (16-bit instr size)

To load a word from memory as a signed value

Description: $GPR[rt] \leftarrow \text{memory}[GPR[29] + (\text{offset} \times 4)]$

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in GPR *rt*. The 5-bit signed *offset* is left shifted by two bits, zero-extended and then is added to the contents of GPR 29 to form the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← zero_extend(offset || 02) + GPR[29]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	index	base	rd	0	LWXs 0100011000

6 5 5 5 1 10

Format: LWXS rd, index(base)

microMIPS

Purpose: Load Word Indexed, Scaled

To load a word from memory as a signed value, using scaled indexed addressing.

Description: GPR[rd] \leftarrow memory[GPR[base] + (GPR[index] \times 4)]

The contents of GPR *index* is multiplied by 4 and the result is added to the contents of GPR *base* to form an effective address. The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in GPR *rd*.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr  $\leftarrow$  (GPR[index]61..0 || 02) + GPR[base]
if vAddr1..0  $\neq$  02 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdouble  $\leftarrow$  LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
GPR[rd]  $\leftarrow$  sign_extend(memdouble31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

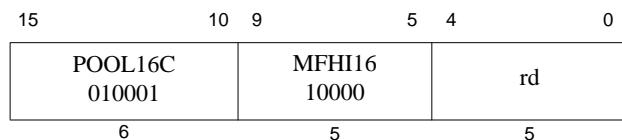**Format:** MFHI16 rd**microMIPS****Purpose:** Move From HI Register (16-bit instr size)To copy the special purpose *HI* register to a GPR**Description:** GPR[rd] ← HIThe contents of special register *HI* are loaded into GPR *rd*.**Restrictions:**

None

Operation:


GPR[rd] ← HI

Exceptions:

None

Historical Information:

In the MIPS I, II, and III architectures, the two instructions which follow the MFHI must not modify the *HI* register. If this restriction is violated, the result of the MFHI is **UNPREDICTABLE**. This restriction was removed in MIPS IV and MIPS32, and all subsequent levels of the architecture.

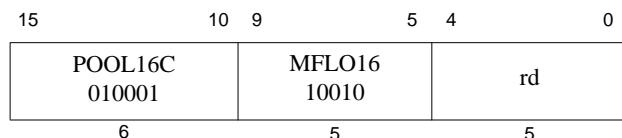**Format:** MFLO16 rd**microMIPS****Purpose:** Move From LO RegisterTo copy the special purpose *LO* register to a GPR**Description:** GPR[rd] ← LOThe contents of special register *LO* are loaded into GPR *rd*.**Restrictions:**

None

Operation:


GPR[rd] ← LO

Exceptions:

None

Historical Information:

In the MIPS I, II, and III architectures, the two instructions which follow the MFHI must not modify the *HI* register. If this restriction is violated, the result of the MFHI is **UNPREDICTABLE**. This restriction was removed in MIPS IV and MIPS32, and all subsequent levels of the architecture.

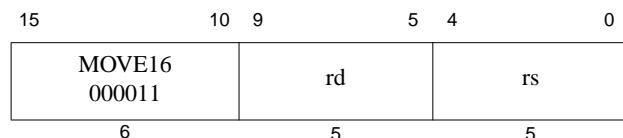

Format: MOVE16 rd, rs

microMIPS

Purpose: Move Register (16-bit instr size)

To copy one GPR to another GPR.

Description: $\text{GPR}[\text{rd}] \leftarrow \text{GPR}[\text{rs}]$

The contents of GPR *rs* are placed into GPR *rd*.

Restrictions:


None

Operation:

$\text{GPR}[\text{rd}] \leftarrow \text{GPR}[\text{rs}]$

Exceptions:

None

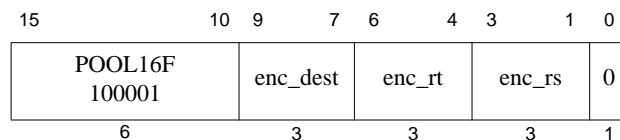

Format: MOVEP rd, re, rs, rt

microMIPS

Purpose: Move a Pair of Registers

To copy two GPRs to another two GPRs.

Description: $\text{GPR}[rd] \leftarrow \text{GPR}[rs]; \text{GPR}[re] \leftarrow \text{GPR}[rt];$

The contents of GPR *rs* are placed into GPR *rd*. The contents of GPR *rt* are placed into GPR *re*.

The register numbers *rd* and *re* are determined by the encoded *enc_dest* field:

Table 5.13 Encoded and Decoded Values of the Enc_Dest Field

Encoded Value of Instr _{9..7} (Decimal)	Encoded Value of Instr _{9..7} (Hex)	Decoded Value of <i>rd</i> (Decimal)	Decoded Value of <i>re</i> (Decimal)
0	0x0	5	6
1	0x1	5	7
2	0x2	6	7
3	0x3	4	21
4	0x4	4	22
5	0x5	4	5
6	0x6	4	6
7	0x7	4	7

The register numbers *rs* and *rt* are determined by the encoded *enc_rs* and *enc_rt* fields:

Table 5.14 Encoded and Decoded Values of the Enc_rs and Enc_rt Fields

Encoded Value of Instr _{6..4} (or Instr _{3..1}) (Decimal)	Encoded Value of Instr _{6..4} (or Instr _{3..1}) (Hex)	Decoded Value of rt (or rs) (Decimal)	Symbolic Name (From ArchDefs.h)
0	0x0	0	zero
1	0x1	17	s1
2	0x2	2	v0
3	0x3	3	v1
4	0x4	16	s0
5	0x5	18	s2
6	0x6	19	s3
7	0x7	20	s4

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The destination register pair field, *enc_dest*, can only specify the register pairs defined in [Table 5.13](#).

The source register fields *enc_rs* and *enc_rt* can only specify GPRs 0,2-3,16-20.


The behavior of this instruction is **UNPREDICTABLE**, if it is placed in a delay slot of a jump or branch.

Operation:

GPR[rd] \leftarrow GPR[rs]; GPR[re] \leftarrow GPR[rt]

Exceptions:

None

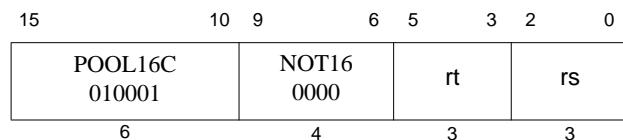**Format:** NOT16 rt, rs**microMIPS****Purpose:** Invert (16-bit instr size)


To do a bitwise logical inversion.

Description: $GPR[rt] \leftarrow GPR[rs] \text{ XOR } 0xffffffffffff$ Invert the contents of GPR *rs* in a bitwise fashion and place the result into GPR *rt*.**Restrictions:**

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation: $GPR[rt] \leftarrow GPR[rs] \text{ xor } 0xffffffffffff$ **Exceptions:**

None

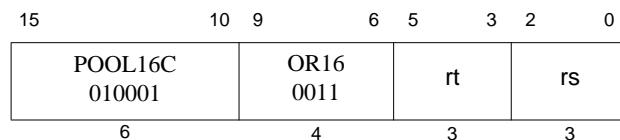**Format:** OR16 rt, rs**MIPS32****Purpose:** Or (16-bit instr size)


To do a bitwise logical OR

Description: $\text{GPR}[rt] \leftarrow \text{GPR}[rs] \text{ or } \text{GPR}[rt]$ The contents of GPR *rs* are combined with the contents of GPR *rt* in a bitwise logical OR operation. The result is placed into GPR *rt*.**Restrictions:**

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation: $\text{GPR}[rt] \leftarrow \text{GPR}[rs] \text{ or } \text{GPR}[rt]$ **Exceptions:**

None

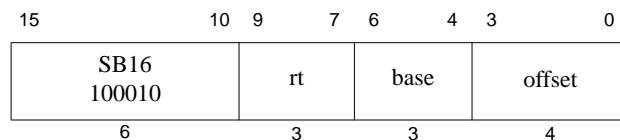

Format: SB16 rt, offset(base)

microMIPS

Purpose: Store Byte (16-bit instr size)

To store a byte to memory

Description: $\text{memory}[\text{GPR}[\text{base}] + \text{offset}] \leftarrow \text{GPR}[\text{rt}]$

The least-significant 8-bit byte of GPR *rt* is stored in memory at the location specified by the effective address. The 4-bit unsigned *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

The 3-bit *base* register field can only specify GPRs \$2-\$7, \$16, \$17.

The 3-bit *rt* register field can only specify GPRs \$0, \$2-\$7, \$17.

Operation:


```

vAddr ← zero_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
bytesel ← vAddr2..0 xor BigEndianCPU3
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, BYTE, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Watch

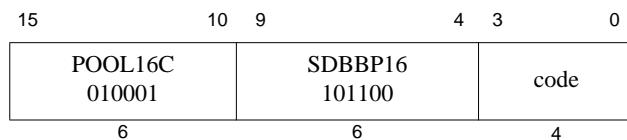**Format:** SDBBP16 code**EJTAG+microMIPS****Purpose:** Software Debug Breakpoint (16-bit instr size)

To cause a debug breakpoint exception

Description:

This instruction causes a debug exception, passing control to the debug exception handler. If the processor is executing in Debug Mode when the SDBBP instruction is executed, the exception is a Debug Mode Exception, which sets the DebugDExcCode field to the value 0x9 (Bp). The code field can be used for passing information to the debug exception handler, and is retrieved by the debug exception handler only by loading the contents of the memory word containing the instruction, using the DEPC register. The CODE field is not used in any way by the hardware.

Restrictions:**Operation:**

```

If DebugDM = 0 then
    SignalDebugBreakpointException()
else
    SignalDebugModeBreakpointException()
endif

```

Exceptions:

Debug Breakpoint Exception

Debug Mode Breakpoint Exception

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	reglist	base	SDM 1111	offset	

6 5 5 4 12

Format: SDM {sregs, } {ra}, offset(base)

microMIPS

Purpose: Store Doubleword Multiple

To store a sequence of consecutive doublewords to memory

Description: `memory[GPR[base]+offset], ..., memory[GPR[base]+offset+4*(fn(reglist))]` ← `{GPR[16], {GPR[17], {GPR[18], {GPR[19], {GPR[20], {GPR[21], {GPR[22], {GPR[23], {GPR[30]} }}}}}}}{GPR[21]}`

The contents of the 64-bit doublewords of the GPRs defined by *reglist* are stored in memory at the location specified by the aligned effective address. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The following table shows the encoding of the *reglist* field.

reglist Encoding (binary)	List of Registers Stored
0 0 0 0 1	GPR[16]
0 0 0 1 0	GPR[16], GPR[17]
0 0 0 1 1	GPR[16], GPR[17], GPR[18]
0 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19]
0 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20]
0 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21]
0 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22]
0 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23]
0 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30]
1 0 0 0 0	GPR[31]
1 0 0 0 1	GPR[16], GPR[31]
1 0 0 1 0	GPR[16], GPR[17], GPR[31]
1 0 0 1 1	GPR[16], GPR[17], GPR[18], GPR[31]
1 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[31]
1 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[31]
1 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[31]
1 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[31]
1 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[31]
1 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30], GPR[31]

reglist Encoding (binary)	List of Registers Stored
All other combinations	Reserved

The register numbers and the effective addresses are correlated using the order listed in the table, starting with the left-most register on the list and ending with the right-most register on the list. The effective address is incremented for each subsequent register on the list.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be naturally aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of this instruction is **UNDEFINED**, if it is placed in a delay slot of a jump or branch.

Operation:

```

if Are64bitOperationsEnabled() then
    vAddr ← sign_extend(offset) + GPR[base]
    if vAddr2..0 ≠ 03 then
        SignalException(AddressError)
    endif
    for i←0 to fn(reglist)
        (pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
        datadoubleword ← GPR[gpr(reglist,i)]
        StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)
        vAddr ← vAddr + 8
    endfor
else
    SignalException(ReservedInstruction)
endif

function fn(list)
    fn ← number of entries in list - 1
endfunction

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Reserved Instruction, Watch

Programming Notes:

This instruction executes for a variable number of cycles and performs a variable number of stores to memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	rd	base	SDP 1100	offset	

6 5 5 4 12

Format: SDP rd, offset(base)

microMIPS

Purpose: Store Doubleword Pair

To store two consecutive doublewords to memory

Description: $\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rd], \text{GPR}[rd+1]$

The contents of the 64-bit doublewords of GPR *rd* and GPR *rd+1* are stored in memory at the location specified by the aligned effective address. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be naturally aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of the instructions is **UNDEFINED** if *rd* equals \$31.

The behavior of this instruction is **UNDEFINED**, if it is placed in a delay slot of a jump or branch.

Operation:

```

if Are64bitOperationsEnabled() then
    vAddr ← sign_extend(offset) + GPR[base]
    if vAddr2..0 ≠ 03 then
        SignalException(AddressError)
    endif
    (pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)←←
    datadoubleword ← GPR[rd]
    StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)
    vAddr ← sign_extend(offset) + GPR[base] + 8
    (pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)←←
    datadoubleword ← GPR[rd+1]
    StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)
else
    SignalException(ReservedInstruction)
endif


```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Reserved Instruction, Watch

Programming Notes:

This instruction may execute for a variable number of cycles and may perform a variable number of stores to memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

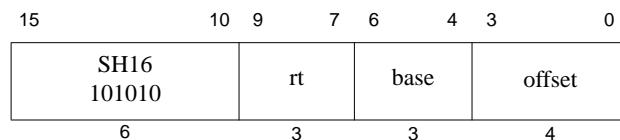

Format: SH16 rt, left_shifted_offset(base)

microMIPS

Purpose: Store Halfword (16-bit instr size)

To store a halfword to memory

Description: $\text{memory}[\text{GPR}[\text{base}] + (\text{offset} \times 2)] \leftarrow \text{GPR}[\text{rt}]$

The least-significant 16-bit halfword of register *rt* is stored in memory at the location specified by the aligned effective address. The 4-bit unsigned *offset* is left shifted by one bit and then added to the contents of GPR *base* to form the effective address.

Restrictions:

The 3-bit *base* register field can only specify GPRs \$2-\$7, \$16, \$17.

The 3-bit *rt* register field can only specify GPRs \$0, \$2-\$7, \$17.

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 0) + GPR[base]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
bytesel ← vAddr2..0 xor (BigEndianCPU2 || 0)
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, HALFWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

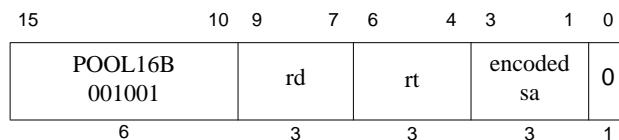**Format:** SLL16 rd, rt, decoded_sa**microMIPS****Purpose:** Shift Word Left Logical (16-bit instr size)

To left-shift a word by a fixed number of bits

Description: GPR[rd] \leftarrow GPR[rt] \ll decoded_sa

The contents of the low-order 32-bit word of GPR *rt* are shifted left, inserting zeros into the emptied bits; the word result is sign-extended and placed in GPR *rd*. The bit-shift amount is specified by decoding the *encoded_sa* field. Table 5.15 lists the encoded values of the *encoded_sa* field and the actual bit shift amount values.

Table 5.15 Shift Amount Field Encoding

Encoded Input (Hex)	Decoded Value (Decimal)
0	8
1	1
2	2
3	3
4	4
5	5
6	6
7	7

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation:

```

decoded_sa  $\leftarrow$  DECODE(encoded_sa)
s  $\leftarrow$  decoded_sa
temp  $\leftarrow$  GPR[rt](31-s)... || 0s
GPR[rd]  $\leftarrow$  sign_extend(temp)


```

Exceptions:

None

Programming Notes:

Unlike nearly all other word operations, the SLL input operand does not have to be a properly sign-extended word value to produce a valid sign-extended 32-bit result. The result word is always sign-extended into a 64-bit destination register; this instruction with a zero shift amount truncates a 64-bit value to 32 bits and sign-extends it.

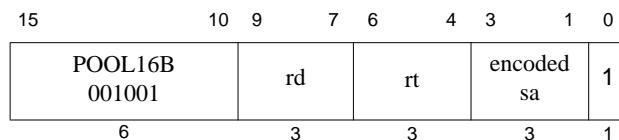**Format:** SRL16 rd, rt, decoded_sa**microMIPS****Purpose:** Shift Word Right Logical (16-bit instr size)

To execute a logical right-shift of a word by a fixed number of bits

Description: $GPR[rd] \leftarrow GPR[rt] \gg \text{decoded_sa}$ (logical)

The contents of the low-order 32-bit word of GPR *rt* are shifted right, inserting zeros into the emptied bits; the word result is sign-extended and placed in GPR *rd*. The bit-shift amount is specified by . by decoding the *encoded_sa* field. Table 5.16 lists the encoded values of the *encoded_sa* field and the actual bit shift amount values.

Table 5.16 Shift Amount Field Encoding

Encoded Input (Hex)	Decoded Value (Decimal)
0	8
1	1
2	2
3	3
4	4
5	5
6	6
7	7

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

On 64-bit processors, if GPR *rt* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```

if NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
decoded_sa ← DECODE(encoded_sa)
s ← decoded_sa
temp ← 0s || GPR[rt]31..s
GPR[rd] ← sign_extend(temp)

```

Exceptions:

None

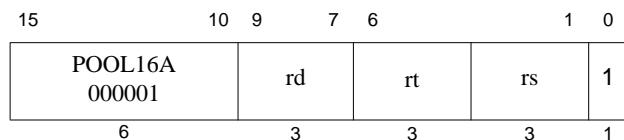

Format: SUBU16 rd, rs, rt

microMIPS

Purpose: Subtract Unsigned Word (16-bit instr size)

To subtract 32-bit integers

Description: $GPR[rd] \leftarrow GPR[rs] - GPR[rt]$

The 32-bit word value in GPR *rt* is subtracted from the 32-bit value in GPR *rs* and the 32-bit arithmetic result is sign-extended and placed into GPR *rd*.

No integer overflow exception occurs under any circumstances.

Restrictions:

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

On 64-bit processors, if either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← GPR[rs] - GPR[rt]
GPR[rd] ← sign_extend(temp)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

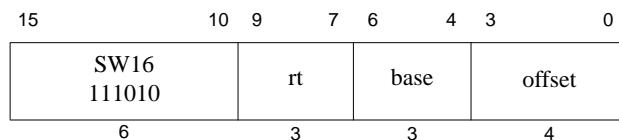

Format: SW16 rt, left_shifted_offset(base)

microMIPS

Purpose: Store Word (16-bit instr size)

To store a word to memory

Description: `memory[GPR[base] + (offset × 4)] ← GPR[rt]`

The least-significant 32-bit word of GPR *rt* is stored in memory at the location specified by the aligned effective address. The 4-bit unsigned *offset* is left-shifted by two bits and then added to the contents of GPR *base* to form the effective address.

Restrictions:

The 3-bit *base* register field can only specify GPRs \$2-\$7, \$16, \$17.

The 3-bit *rt* register field can only specify GPRs \$0, \$2-\$7, \$17.


The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr ← zero_extend(offset || 02) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
byteresel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[rt]63-8*byteresel..0 || 08*byteresel
StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

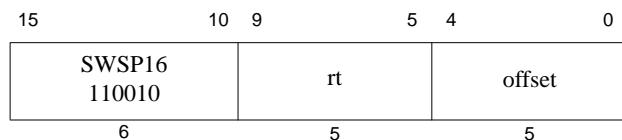

Format: SWSP rt, left_shifted_offset(base)

microMIPS

Purpose: Store Word to Stack Pointer (16-bit instr size)

To store a word to memory

Description: $\text{memory}[\text{GPR}[29] + (\text{offset} \times 4)] \leftarrow \text{GPR}[\text{rt}]$

The least-significant 32-bit word of GPR *rt* is stored in memory at the location specified by the aligned effective address. The 5-bit signed *offset* is left shifted by two bits, zero-extended and then is added to the contents of GPR 29 to form the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← zero_extend(offset || 02) + GPR[29]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	reglist	base	SWM 1101	offset	

6 5 5 4 12

Format: SWM32 {sregs, } {ra}, offset(base)

microMIPS

Purpose: Store Word Multiple

To store a sequence of consecutive words to memory

Description: `memory[GPR[base]+offset], ..., memory[GPR[base]+offset+4*(fn(reglist))]` ← `{GPR[16], {GPR[17], {GPR[18], {GPR[19], {GPR[20], {GPR[21], {GPR[22], {GPR[23], {GPR[30]} }}}}}}}{GPR[31]}`

The least-significant 32-bit words of the GPRs defined by *reglist* are stored in memory at the location specified by the aligned effective address. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The following table shows the encoding of the *reglist* field.

reglist Encoding (binary)	List of Registers Loaded
0 0 0 0 1	GPR[16]
0 0 0 1 0	GPR[16], GPR[17]
0 0 0 1 1	GPR[16], GPR[17], GPR[18]
0 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19]
0 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20]
0 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21]
0 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22]
0 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23]
0 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30]
1 0 0 0 0	GPR[31]
1 0 0 0 1	GPR[16], GPR[31]
1 0 0 1 0	GPR[16], GPR[17], GPR[31]
1 0 0 1 1	GPR[16], GPR[17], GPR[18], GPR[31]
1 0 1 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[31]
1 0 1 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[31]
1 0 1 1 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[31]
1 0 1 1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[31]
1 1 0 0 0	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[31]
1 1 0 0 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[20], GPR[21], GPR[22], GPR[23], GPR[30], GPR[31]

reglist Encoding (binary)	List of Registers Loaded
All other combinations	Reserved

The register numbers and the effective addresses are correlated using the order listed in the table, starting with the left-most register on the list and ending with the right-most register on the list. The effective address is incremented for each subsequent register on the list.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be 32-bit aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of this instruction is **UNPREDICTABLE**, if it is placed in a delay slot of a jump or branch.

Operation:

```


vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
for i←0 to fn(reglist)
    (pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
    pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
    bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
    datadoubleword ← GPR[gpr(reglist,i)]63-8*bytesel..0 || 08*bytesel
    StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
    vAddr ← vAddr + 4
endfor

function fn(list)
    fn ← (number of entries in list) - 1
endfunction

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

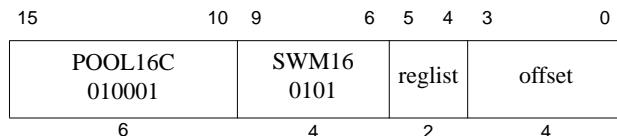

Format: SWM16 s0, {s1, {s2, {s3, }}} ra, left_shifted_offset(sp)

microMIPS

Purpose: Store Word Multiple (16-bit)

To store a sequence of consecutive words to memory

Description: `memory[GPR[29]], ..., memory[GPR[29]+(offset<<2)+4*(2+fn(reglist))] ← GPR[16], {GPR[17], {GPR[18], {GPR[19], }}} GPR[31]`

The least-significant 32-bit words of the GPRs defined by *reglist* are stored in memory at the location specified by the aligned effective address. The 4-bit unsigned *offset* is added to the contents of GPR *sp* to form the effective address.

The following table shows the encoding of the *reglist* field.

reglist Encoding (binary)	List of Registers Stored
0 0	GPR[16], GPR[31]
0 1	GPR[16], GPR[17], GPR[31]
1 0	GPR[16], GPR[17], GPR[18], GPR[31]
1 1	GPR[16], GPR[17], GPR[18], GPR[19], GPR[31]

The register numbers and the effective addresses are correlated using the order listed in the table, starting with the left-most register on the list and ending with the right-most register on the list. The effective address is incremented for each subsequent register on the list.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be 32-bit aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of this instruction is **UNPREDICTABLE**, if it is placed in a delay slot of a jump or branch.

Operation:

```

vAddr ← zero_extend(offset || 02) + GPR[sp]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
for i←0 to fn(reglist)
    (pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
    pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
    bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
    datadoubleword ← GPR[gpr(reglist,i)]63-8*bytesel..0 || 08*bytesel
    StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
    vAddr ← vAddr + 4

```

```
endfor

function fn(list)
    fn ← number of entries in list - 1
endfunction
```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	rs1	base	SWP 1001	offset	

Format: SWP rs1, offset(base)

microMIPS

Purpose:

To store two consecutive words to memory

Description: $\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rs1], \text{GPR}[rs1+1]$

The least-significant 32-bit words of GPR *rs1* and GPR *rs1+1* are stored in memory at the location specified by the aligned effective address. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

It is implementation-specific whether interrupts are disabled during the sequence of operations generated by this instruction.

Restrictions:

The effective address must be 32-bit aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

The behavior of the instructions is **UNDEFINED** if *rd* equals \$31.

The behavior of this instruction is **UNDEFINED**, if it is placed in a delay slot of a jump or branch.

Operation:

```


vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[rs1]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

vAddr ← sign_extend(offset) + GPR[base] + 4
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[rs1+1]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

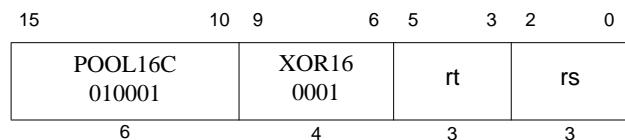**Format:** XOR16 rt, rs**microMIPS****Purpose:** Exclusive OR (16-bit instr size)

To do a bitwise logical Exclusive OR

Description: GPR[rt] \leftarrow GPR[rs] XOR GPR[rt]Combine the contents of GPR *rs* and GPR *rt* in a bitwise logical Exclusive OR operation and place the result into GPR *rt*.**Restrictions:**

The 3-bit register fields can only specify GPRs \$2-\$7, \$16, \$17.

Operation:GPR[rt] \leftarrow GPR[rs] xor GPR[rt]**Exceptions:**

None

5.5 Recoded 32-Bit Instructions

This section defines the recoded instructions of the existing MIPS64 instruction sets.

31	26 25	21 20	16 15 14 13 12	6 5	0
POOL32F 010101	ft	fs	0 fmt	ABS 0001101	POOL32FXf 111011

6 5 5 1 2 7 6

Format: ABS.fmt
 ABS.S ft, fs
 ABS.D ft, fs
 ABS.PS ft, fs

microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Absolute Value

Description: FPR[ft] $\leftarrow \text{abs}(\text{FPR}[fs])$

The absolute value of the value in FPR *fs* is placed in FPR *ft*. The operand and result are values in format *fmt*. ABS.PS takes the absolute value of the two values in FPR *fs* independently, and ORs together any generated exceptions.

Cause bits are ORed into the *Flag* bits if no exception is taken.

If *FIR*_{Has2008}=0 or *FCSR*_{ABS2008}=0 then this operation is arithmetic. For this case , any NaN operand signals invalid operation.

If *FCSR*_{ABS2008}=1 then this operation is non-arithmetic. For this case, both regular floating point numbers and NAN values are treated alike, only the sign bit is affected by this instruction. No IEEE exception can be generated for this case.

Restrictions:

The fields *fs* and *ft* must specify FPRs valid for operands of type *fmt*. If they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of ABS.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
StoreFPR(ft, fmt, AbsoluteValue(ValueFPR(fs, fmt)))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation, Invalid Operation

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	ADD 0100010000

Format: ADD rd, rs, rt

microMIPS

Purpose: Add Word

To add 32-bit integers. If an overflow occurs, then trap.

Description: $GPR[rd] \leftarrow GPR[rs] + GPR[rt]$

The 32-bit word value in GPR *rt* is added to the 32-bit value in GPR *rs* to produce a 32-bit result.

- If the addition results in 32-bit 2's complement arithmetic overflow, the destination register is not modified and an Integer Overflow exception occurs.
- If the addition does not overflow, the 32-bit result is signed-extended and placed into GPR *rd*.

Restrictions:

If either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits $_{63..31}$ equal), then the result of the operation is UNPREDICTABLE.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← (GPR[rs]31 || GPR[rs]31..0) + (GPR[rt]31 || GPR[rt]31..0)
if temp32 ≠ temp31 then
    SignalException(IntegerOverflow)
else
    GPR[rd] ← sign_extend(temp31..0)
endif

```

Exceptions:

Integer Overflow

Programming Notes:

ADDU performs the same arithmetic operation but does not trap on overflow.

31	26 25	21 20	16 15	11 10 9 8 7	0
POOL32F 010101	ft	fs	fd	0 fmt	ADD 00110000

6 5 5 5 1 2 8

Format: ADD fmt
 ADD.S fd, fs, ft
 ADD.D fd, fs, ft
 ADD.PS fd, fs, ft

microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Add

To add floating point values

Description: FPR[fd] \leftarrow FPR[fs] + FPR[ft]

The value in FPR *ft* is added to the value in FPR *fs*. The result is calculated to infinite precision, rounded by using to the current rounding mode in *FCSR*, and placed into FPR *fd*. The operands and result are values in format *fmt*. ADD.PS adds the upper and lower halves of FPR *fs* and FPR *ft* independently, and ORs together any generated exceptions.

Cause bits are ORed into the *Flag* bits if no exception is taken.

Restrictions:

The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*. If they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of ADD.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

StoreFPR (fd, fmt, ValueFPR(fs, fmt) +_{fmt} ValueFPR(ft, fmt))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation, Invalid Operation, Inexact, Overflow, Underflow

31	26 25	21 20	16 15	0
ADDI32 000100	rt	rs	immediate	

6 5 5 16

Format: ADDI rt, rs, immediate**microMIPS****Purpose:** Add Immediate Word

To add a constant to a 32-bit integer. If overflow occurs, then trap.

Description: $GPR[rt] \leftarrow GPR[rs] + \text{immediate}$ The 16-bit signed *immediate* is added to the 32-bit value in GPR *rs* to produce a 32-bit result.

- If the addition results in 32-bit 2's complement arithmetic overflow, the destination register is not modified and an Integer Overflow exception occurs.
- If the addition does not overflow, the 32-bit result is sign-extended and placed into GPR *rt*.

Restrictions:If GPR *rs* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp ← (GPR[rs]31 || GPR[rs]31..0) + sign_extend(immediate)
if temp32 ≠ temp31 then
    SignalException(IntegerOverflow)
else
    GPR[rt] ← sign_extend(temp31..0)
endif

```

Exceptions:

Integer Overflow

Programming Notes:

ADDIU performs the same arithmetic operation but does not trap on overflow.

31	26 25	21 20	16 15	0
ADDIU32 001100	rt	rs	immediate	

6 5 5 16

Format: ADDIU rt, rs, immediate**microMIPS****Purpose:** Add Immediate Unsigned Word

To add a constant to a 32-bit integer

Description: $GPR[rt] \leftarrow GPR[rs] + \text{immediate}$ The 16-bit signed *immediate* is added to the 32-bit value in GPR *rs* and the 32-bit arithmetic result is sign-extended and placed into GPR *rt*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:If GPR *rs* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp <- GPR[rs] + sign_extend(immediate)
GPR[rt] <- sign_extend(temp31..0)

```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. This instruction is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

31	26 25	21 20	16 15	11 10	0
POOL32A 000000	rt	rs	rd	0	ADDU 0101010000

Format: ADDU rd, rs, rt

microMIPS

Purpose: Add Unsigned Word

To add 32-bit integers

Description: $GPR[rd] \leftarrow GPR[rs] + GPR[rt]$

The 32-bit word value in GPR *rt* is added to the 32-bit value in GPR *rs* and the 32-bit arithmetic result is sign-extended and placed into GPR *rd*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:

If either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```
if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← GPR[rs] + GPR[rt]
GPR[rd] ← sign_extend(temp31..0)
```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. This instruction is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	rs	ALNV.PS 011001	
6	5	5	5	5	6	

Format: ALNV.PS fd, fs, ft, rs

microMIPS

Purpose: Floating Point Align Variable


To align a misaligned pair of paired single values

Description: $FPR[fd] \leftarrow \text{ByteAlign}(GPR[rs]_{2..0}, FPR[fs], FPR[ft])$

FPR fs is concatenated with FPR ft and this value is funnel-shifted by GPR $rs_{2..0}$ bytes, and written into FPR fd . If GPR $rs_{2..0}$ is 0, FPR fd receives FPR fs . If GPR $rs_{2..0}$ is 4, the operation depends on the current endianness.

Figure 3-1 illustrates the following example: for a big-endian operation and a byte alignment of 4, the upper half of FPR fd receives the lower half of the paired single value in fs , and the lower half of FPR fd receives the upper half of the paired single value in FPR ft .

Figure 5.1 Example of an ALNV.PS Operation

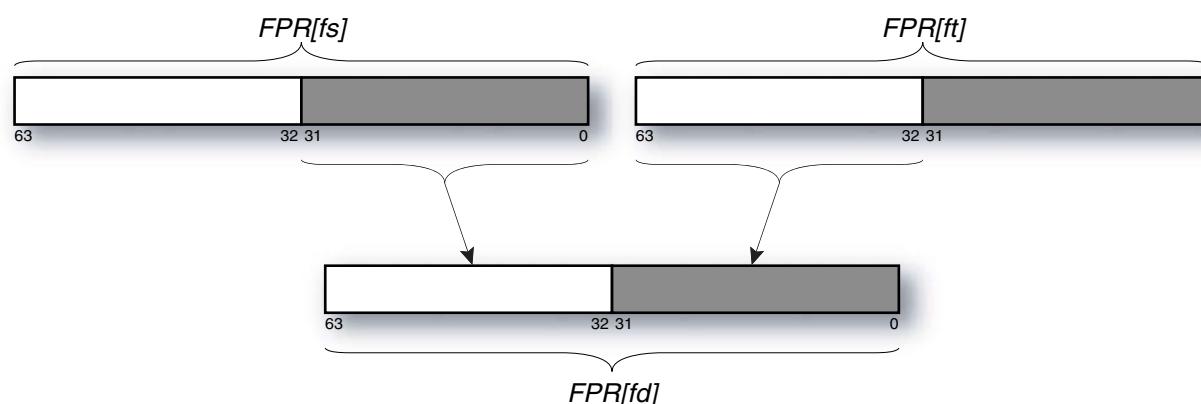

The move is non arithmetic; it causes no IEEE 754 exceptions.

Restrictions:

The fields fs , ft , and fd must specify FPRs valid for operands of type PS . If they are not valid, the result is **UNPREDICTABLE**.

If GPR $rs_{1..0}$ are non-zero, the results are **UNPREDICTABLE**.

The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```

if GPR[rs]_{2..0} = 0 then
    StoreFPR(fd, PS, ValueFPR(fs, PS))
else if GPR[rs]_{2..0} ≠ 4 then
    UNPREDICTABLE
else if BigEndianCPU then
    StoreFPR(fd, PS, ValueFPR(fs, PS)_{31..0} || ValueFPR(ft, PS)_{63..32})
else
    StoreFPR(fd, PS, ValueFPR(ft, PS)_{31..0} || ValueFPR(fs, PS)_{63..32})
endif

```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Programming Notes:

ALNV.PS is designed to be used with LUXC1 to load 8 bytes of data from any 4-byte boundary. For example:

```
/* Copy T2 bytes (a multiple of 16) of data T0 to T1, T0 unaligned, T1 aligned.
   Reads one dw beyond the end of T0. */
LUXC1    F0, 0(T0) /* set up by reading 1st src dw */
LI        T3, 0      /* index into src and dst arrays */
ADDIU    T4, T0, 8   /* base for odd dw loads */
ADDIU    T5, T1, -8 /* base for odd dw stores */
LOOP:
LUXC1    F1, T3(T4)
ALNV.PS  F2, F0, F1, T0/* switch F0, F1 for little-endian */
SDC1     F2, T3(T1)
ADDIU    T3, T3, 16
LUXC1    F0, T3(T0)
ALNV.PS  F2, F1, F0, T0/* switch F1, F0 for little-endian */
BNE      T3, T2, LOOP
SDC1     F2, T3(T5)
DONE:
```

ALNV.PS is also useful with SUXC1 to store paired-single results in a vector loop to a possibly misaligned address:

```
/* T1[i] = T0[i] + F8, T0 aligned, T1 unaligned. */
CVT.PS.S F8, F8, F8/* make addend paired-single */

/* Loop header computes 1st pair into F0, stores high half if T1 */
/* misaligned */

LOOP:
LDC1    F2, T3(T4)/* get T0[i+2]/T0[i+3] */
ADD.PS  F1, F2, F8/* compute T1[i+2]/T1[i+3] */
ALNV.PS F3, F0, F1, T1/* align to dst memory */
SUXC1    F3, T3(T1)/* store to T1[i+0]/T1[i+1] */
ADDIU    T3, 16      /* i = i + 4 */
LDC1    F2, T3(T0)/* get T0[i+0]/T0[i+1] */
ADD.PS  F0, F2, F8/* compute T1[i+0]/T1[i+1] */
ALNV.PS F3, F1, F0, T1/* align to dst memory */
BNE      T3, T2, LOOP
SUXC1    F3, T3(T5)/* store to T1[i+2]/T1[i+3] */

/* Loop trailer stores all or half of F0, depending on T1 alignment */
```


31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	AND 1001010000

Format: AND rd, rs, rt

microMIPS

Purpose: And

To do a bitwise logical AND

Description: $GPR[rd] \leftarrow GPR[rs] \text{ AND } GPR[rt]$

The contents of GPR *rs* are combined with the contents of GPR *rt* in a bitwise logical AND operation. The result is placed into GPR *rd*.

Restrictions:

None

Operation:

$GPR[rd] \leftarrow GPR[rs] \text{ and } GPR[rt]$

Exceptions:

None

31	26 25	21 20	16 15	0
ANDI32 110100	rt	rs	immediate	

6 5 5 16

Format: ANDI rt, rs, immediate**microMIPS****Purpose:** And Immediate

To do a bitwise logical AND with a constant

Description: $GPR[rt] \leftarrow GPR[rs] \text{ AND immediate}$

The 16-bit immediate is zero-extended to the left and combined with the contents of GPR rs in a bitwise logical AND operation. The result is placed into GPR rt.

Restrictions:

None

Operation: $GPR[rt] \leftarrow GPR[rs] \text{ and zero_extend(immediate)}$ **Exceptions:**

None

31	26 25	21 20	16 15	0
BEQ32 100101	0 00000	0 00000		offset

6 5 5 16

Format: B offset**Assembly Idiom****Purpose:** Unconditional Branch

To do an unconditional branch

Description: branch

B offset is the assembly idiom used to denote an unconditional branch. The actual instruction is interpreted by the hardware as BEQ r0, r0, offset.

An 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```
I:     target_offset ← sign_extend(offset || 01)
I+1:   PC ← PC + target_offset
```

Exceptions:

None

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 Kbytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	16 15	0
POOL32I 010000	BGEZAL 00011	0 00000		offset

6 5 5 16

Format: BAL offset**Assembly Idiom****Purpose:** Branch and Link

To do an unconditional PC-relative procedure call

Description: procedure_call

BAL offset is the assembly idiom used to denote an unconditional branch. The actual instruction is interpreted by the hardware as BGEZAL r0, offset.

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

An 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

GPR 31 must not be used for the source register *rs*, because such an instruction does not have the same effect when re-executed. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by re-executing the branch when an exception occurs in the branch delay slot.

Operation:

```
I:     target_offset ← sign_extend(offset || 01)
      GPR[31] ← PC + 8
I+1:   PC ← PC + target_offset
```

Exceptions:

None

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump and link (JAL) or jump and link register (JALR) instructions for procedure calls to addresses outside this range.

31	26 25	21 20	18 17 16 15	0
POOL32I 010000	BC1F 11100	cc	00	offset

6 5 3 2 16

Format: BC1F offset (cc = 0 implied)
 BC1F cc, offset

microMIPS
 microMIPS

Purpose:

To test an FP condition code and do a PC-relative conditional branch

Description: if FPConditionCode(cc) = 0 then branch

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself) in the branch delay slot to form a PC-relative effective target address. If the FP condition code bit *cc* is false (0), the program branches to the effective target address after the instruction in the delay slot is executed. An FP condition code is set by the FP compare instruction, C.cond fmt.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I:    condition ← FPConditionCode(cc) = 0
    target_offset ← (offset15)GPRLEN-(16+1) || offset || 01
I+1:  if condition then
        PC ← PC + target_offset
    endif
  
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range

Historical Information:

The MIPS I architecture defines a single floating point condition code, implemented as the coprocessor 1 condition signal (*Cp1Cond*) and the *C* bit in the FP *Control/Status* register. MIPS I, II, and III architectures must have the *CC* field set to 0, which is implied by the first format in the “Format” section.

The MIPS IV and MIPS32 architectures add seven more *Condition Code* bits to the original condition code 0. FP compare and conditional branch instructions specify the *Condition Code* bit to set or test. Both assembler formats are valid for MIPS IV and MIPS32.

In the MIPS I, II, and III architectures there must be at least one instruction between the compare instruction that sets the condition code and the branch instruction that tests it. Hardware does not detect a violation of this restriction.

31	26 25	21 20	18 17 16 15	0
POOL32I 010000	BC1T 11101	cc	00	offset

6 5 3 2 16

Format: BC1T offset (cc = 0 implied)
 BC1T cc, offset

microMIPS
 microMIPS

Purpose:

To test an FP condition code and do a PC-relative conditional branch

Description: if FPConditionCode(cc) = 1 then branch

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself) in the branch delay slot to form a PC-relative effective target address. If the FP condition code bit *cc* is true (1), the program branches to the effective target address after the instruction in the delay slot is executed. An FP condition code is set by the FP compare instruction, C.cond.fmt.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I:    condition ← FPConditionCode(cc) = 1
        target_offset ← (offset15)GPRLEN-(16+1) || offset || 01
I+1:  if condition then
            PC ← PC + target_offset
        endif
  
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

Historical Information:

The MIPS I architecture defines a single floating point condition code, implemented as the coprocessor 1 condition signal (*Cp1Cond*) and the *C* bit in the FP *Control/Status* register. MIPS I, II, and III architectures must have the *CC* field set to 0, which is implied by the first format in the “Format” section.

The MIPS IV and MIPS32 architectures add seven more *Condition Code* bits to the original condition code 0. FP compare and conditional branch instructions specify the *Condition Code* bit to set or test. Both assembler formats are valid for MIPS IV and MIPS32.

In the MIPS I, II, and III architectures there must be at least one instruction between the compare instruction that sets the condition code and the branch instruction that tests it. Hardware does not detect a violation of this restriction.

31	26 25	21 20	18 17 16 15	0
POOL32I 010000	BC2F 10100	cc	00	offset

6 5 3 2 16

Format: BC2F offset (cc = 0 implied)
 BC2F cc, offset

microMIPS
 microMIPS

Purpose: Branch on COP2 False

To test a COP2 condition code and do a PC-relative conditional branch

Description: if COP2Condition(cc) = 0 then branch

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself) in the branch delay slot to form a PC-relative effective target address. If the COP2 condition specified by *cc* is false (0), the program branches to the effective target address after the instruction in the delay slot is executed.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

This operation specification is for the general Branch On Condition operation with the *tf* (true/false) and *nd* (nullify delay slot) fields as variables. The individual instructions BC2F, BC2FL, BC2T, and BC2TL have specific values for *tf* and *nd*.

```

I:    condition ← COP2Condition(cc) = 0
        target_offset ← (offset15)GPRLEN-(16+1) || offset || 01
I+1:  if condition then
            PC ← PC + target_offset
        endif
  
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	18 17 16 15	0
POOL32I 010000	BC2T 10101	cc	00	offset

6 5 3 2 16

Format: BC2T offset (cc = 0 implied)
 BC2T cc, offset

microMIPS
 microMIPS

Purpose: Branch on COP2 True

To test a COP2 condition code and do a PC-relative conditional branch

Description: if COP2Condition(cc) = 1 then branch

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself) in the branch delay slot to form a PC-relative effective target address. If the COP2 condition specified by *cc* is true (1), the program branches to the effective target address after the instruction in the delay slot is executed.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

This operation specification is for the general Branch On Condition operation with the *tf* (true/false) and *nd* (nullify delay slot) fields as variables. The individual instructions BC2F, BC2FL, BC2T, and BC2TL have specific values for *tf* and *nd*.

```

I:      condition ← COP2Condition(cc) = 1
      target_offset ← (offset15)GPRLEN-(16+1) || offset || 01
I+1:    if condition then
              PC ← PC + target_offset
              endif
  
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytesj. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	16 15	0
BEQ32 100101	rt	rs	offset	

6 5 5 16

Format: BEQ rs, rt, offset

microMIPS

Purpose: Branch on Equal

To compare GPRs then do a PC-relative conditional branch

Description: if $GPR[rs] = GPR[rt]$ then branchA 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* and GPR *rt* are equal, branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
            condition ← (GPR[rs] = GPR[rt])
I+1:    if condition then
            PC ← PC + target_offset
        endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

BEQ r0, r0 offset, expressed as B offset, is the assembly idiom used to denote an unconditional branch.

31	26 25	21 20	16 15	0
POOL32I 010000	BGEZ 00010	rs	offset	

6 5 5 16

Format: BGEZ rs, offset**microMIPS****Purpose:** Branch on Greater Than or Equal to Zero

To test a GPR then do a PC-relative conditional branch

Description: if $\text{GPR}[\text{rs}] \geq 0$ then branchA 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* are greater than or equal to zero (sign bit is 0), branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] ≥ 0GPRLEN
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	16 15	0
POOL32I 010000	BGEZAL 00011	rs	offset	

6 5 5 16

Format: BGEZAL rs, offset

microMIPS

Purpose: Branch on Greater Than or Equal to Zero and Link

To test a GPR then do a PC-relative conditional procedure call

Description: if $GPR[rs] \geq 0$ then procedure_call

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* are greater than or equal to zero (sign bit is 0), branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of BGEZAL.Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.GPR 31 must not be used for the source register *rs*, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by reexecuting the branch when an exception occurs in the branch delay slot.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] ≥ 0GPRLEN
      GPR[31] ← PC + 8
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump and link (JAL) or jump and link register (JALR) instructions for procedure calls to addresses outside this range.

BGEZAL r0, offset, expressed as BAL offset, is the assembly idiom used to denote a PC-relative branch and link. BAL is used in a manner similar to JAL, but provides PC-relative addressing and a more limited target PC range.

31	26 25	21 20	16 15	0
POOL32I 010000	BGTZ 00110	rs	offset	

6 5 5 16

Format: BGTZ rs, offset

microMIPS

Purpose: Branch on Greater Than Zero

To test a GPR then do a PC-relative conditional branch

Description: if GPR[rs] > 0 then branch

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.

If the contents of GPR *rs* are greater than zero (sign bit is 0 but value not zero), branch to the effective target address after the instruction in the delay slot is executed.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] > 0GPRLEN
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	16 15	0
POOL32I 010000	BLEZ 00100	rs	offset	

6 5 5 16

Format: BLEZ rs, offset

microMIPS

Purpose: Branch on Less Than or Equal to Zero

To test a GPR then do a PC-relative conditional branch

Description: if $\text{GPR}[\text{rs}] \leq 0$ then branchA 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* are less than or equal to zero (sign bit is 1 or value is zero), branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] ≤ 0GPRLEN
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25	21 20	16 15	0
POOL32I 010000	BLTZ 00000	rs	offset	

6 5 5 16

Format: BLTZ rs, offset

microMIPS

Purpose: Branch on Less Than Zero

To test a GPR then do a PC-relative conditional branch

Description: if GPR[rs] < 0 then branchA 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* are less than zero (sign bit is 1), branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] < 0GPRLEN
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump and link (JAL) or jump and link register (JALR) instructions for procedure calls to addresses outside this range.

31	26 25	21 20	16 15	0
POOL32I 010000	BLTZAL 000001	rs	offset	

6 5 5 16

Format: BLTZAL rs, offset

microMIPS

Purpose: Branch on Less Than Zero and Link

To test a GPR then do a PC-relative conditional procedure call

Description: if GPR[rs] < 0 then procedure_call

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

A 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* are less than zero (sign bit is 1), branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of BLTZAL.GPR 31 must not be used for the source register *rs*, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by reexecuting the branch when an exception occurs in the branch delay slot.Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← GPR[rs] < 0GPRLEN
      GPR[31] ← PC + 8
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump and link (JAL) or jump and link register (JALR) instructions for procedure calls to addresses outside this range.

31	26 25	21 20	16 15	0
BNE32 101101	rt	rs	offset	

6 5 5 16

Format: BNE rs, rt, offset**microMIPS****Purpose:** Branch on Not Equal

To compare GPRs then do a PC-relative conditional branch

Description: if GPR[rs] ≠ GPR[rt] then branchA 17-bit signed offset (the 16-bit *offset* field shifted left 1 bits) is added to the address of the instruction following the branch (not the branch itself), in the branch delay slot, to form a PC-relative effective target address.If the contents of GPR *rs* and GPR *rt* are not equal, branch to the effective target address after the instruction in the delay slot is executed.**Restrictions:**Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I:      target_offset ← sign_extend(offset || 01)
      condition ← (GPR[rs] ≠ GPR[rt])
I+1:    if condition then
              PC ← PC + target_offset
            endif
  
```

Exceptions:

None

Programming Notes:

With the 17-bit signed instruction offset, the conditional branch range is ± 64 KBytes. Use jump (J) or jump register (JR) instructions to branch to addresses outside this range.

31	26 25		6 5	0
POOL32A 000000		code	BREAK32 000111	

6 20 6

Format: BREAK

microMIPS

Purpose: Breakpoint

To cause a Breakpoint exception

Description:

A breakpoint exception occurs, immediately and unconditionally transferring control to the exception handler. The *code* field is available for use as software parameters, but is retrieved by the exception handler only by loading the contents of the memory word containing the instruction.

Restrictions:

None

Operation:

SignalException(Breakpoint)

Exceptions:

Breakpoint

31	26 25	21 20	16 15	13 12	11 10	9	6 5	0
POOL32F 010101	ft	fs	cc	0	fmt	cond	c.cond(fmt 111100	6

Format:

C.cond fmt
 C.cond.S fs, ft (cc = 0 implied)
 C.cond.D fs, ft (cc = 0 implied)
 C.cond.PS fs, ft (cc = 0 implied)
 C.cond.S cc, fs, ft
 C.cond.D cc, fs, ft
 C.cond.PS cc, fs, ft

microMIPS
 microMIPS
 microMIPS
 microMIPS
 microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Compare

To compare FP values and record the Boolean result in a condition code

Description: `FPConditionCode(cc) ← FPR[fs] compare_cond FPR[ft]`

The value in FPR *fs* is compared to the value in FPR *ft*; the values are in format *fmt*. The comparison is exact and neither overflows nor underflows.

If the comparison specified by *cond*_{2..1} is true for the operand values, the result is true; otherwise, the result is false. If no exception is taken, the result is written into condition code *CC*; true is 1 and false is 0.

c.cond.PS compares the upper and lower halves of FPR *fs* and FPR *ft* independently and writes the results into condition codes CC +1 and CC respectively. The CC number must be even. If the number is not even the operation of the instruction is **UNPREDICTABLE**.

If one of the values is an SNaN, or *cond*₃ is set and at least one of the values is a QNaN, an Invalid Operation condition is raised and the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation *Enable* bit is set in the *FCSR*, no result is written and an Invalid Operation exception is taken immediately. Otherwise, the Boolean result is written into condition code *CC*.

There are four mutually exclusive ordering relations for comparing floating point values; one relation is always true and the others are false. The familiar relations are *greater than*, *less than*, and *equal*. In addition, the IEEE floating point standard defines the relation *unordered*, which is true when at least one operand value is NaN; NaN compares unordered with everything, including itself. Comparisons ignore the sign of zero, so +0 equals -0.

The comparison condition is a logical predicate, or equation, of the ordering relations such as *less than or equal*, *equal, not less than*, or *unordered or equal*. Compare distinguishes among the 16 comparison predicates. The Boolean result of the instruction is obtained by substituting the Boolean value of each ordering relation for the two FP values in the equation. If the *equal* relation is true, for example, then all four example predicates above yield a true result. If the *unordered* relation is true then only the final predicate, *unordered or equal*, yields a true result.

Logical negation of a compare result allows eight distinct comparisons to test for the 16 predicates as shown in [Table 3.25](#). Each mnemonic tests for both a predicate and its logical negation. For each mnemonic, *compare* tests the truth of the first predicate. When the first predicate is true, the result is true as shown in the “If Predicate Is True” column, and the second predicate must be false, and vice versa. (Note that the False predicate is never true and False/True do not follow the normal pattern.)

The truth of the second predicate is the logical negation of the instruction result. After a compare instruction, test for the truth of the first predicate can be made with the Branch on FP True (BC1T) instruction and the truth of the second can be made with Branch on FP False (BC1F).

[Table 3.26](#) shows another set of eight compare operations, distinguished by a *cond*₃ value of 1 and testing the same 16 conditions. For these additional comparisons, if at least one of the operands is a NaN, including Quiet NaN, then an Invalid Operation condition is raised. If the Invalid Operation condition is enabled in the *FCSR*, an Invalid Operation

exception occurs.

Table 5.17 FPU Comparisons Without Special Operand Exceptions

Instruction Cond Mnemonic	Comparison Predicate Name of Predicate and Logically Negated Predicate (Abbreviation)	Comparison CC Result				Instruction Condition Field 3 2..0	
		Relation Values					
		>	<	=	?		
F	False [this predicate is always False]	F	F	F	F	No	0 0
	True (T)	T	T	T	T		
UN	Unordered	F	F	F	T	T	1
	Ordered (OR)	T	T	T	F		
EQ	Equal	F	F	T	F	T	2
	Not Equal (NEQ)	T	T	F	T		
UEQ	Unordered or Equal	F	F	T	T	T	3
	Ordered or Greater Than or Less Than (OGL)	T	T	F	F		
OLT	Ordered or Less Than	F	T	F	F	T	4
	Unordered or Greater Than or Equal (UGE)	T	F	T	T		
ULT	Unordered or Less Than	F	T	F	T	T	5
	Ordered or Greater Than or Equal (OGE)	T	F	T	F		
OLE	Ordered or Less Than or Equal	F	T	T	F	T	6
	Unordered or Greater Than (UGT)	T	F	F	T		
ULE	Unordered or Less Than or Equal	F	T	T	T	T	7
	Ordered or Greater Than (OGT)	T	F	F	F		

Key: ? = *unordered*, > = *greater than*, < = *less than*, = is *equal*, T = *True*, F = *False*

Table 5.18 FPU Comparisons With Special Operand Exceptions for QNaNs

Instruction	Comparison Predicate					Comparison CC Result		Instruction		
	Cond Mnemonic	Name of Predicate and Logically Negated Predicate (Abbreviation)	Relation Values				If Predicate Is True	Inv Op Excp If QNaN?	Condition Field	
			>	<	=	?			3	2..0
SF		Signaling False [this predicate always False]	F	F	F	F	F	Yes	1	0
		Signaling True (ST)	T	T	T	T			1	
NGLE		Not Greater Than or Less Than or Equal	F	F	F	T	T		2	
		Greater Than or Less Than or Equal (GLE)	T	T	T	F	F		3	
SEQ		Signaling Equal	F	F	T	F	T		4	
		Signaling Not Equal (SNE)	T	T	F	T	F		5	
NGL		Not Greater Than or Less Than	F	F	T	T	T		6	
		Greater Than or Less Than (GL)	T	T	F	F	F		7	
LT		Less Than	F	T	F	F	T			
		Not Less Than (NLT)	T	F	T	T	F			
NGE		Not Greater Than or Equal	F	T	F	T	T			
		Greater Than or Equal (GE)	T	F	T	F	F			
LE		Less Than or Equal	F	T	T	F	T			
		Not Less Than or Equal (NLE)	T	F	F	T	F			
NGT		Not Greater Than	F	T	T	T	T			
		Greater Than (GT)	T	F	F	F	F			

Key: ? = *unordered*, > = *greater than*, < = *less than*, = is *equal*, T = *True*, F = *False*

Restrictions:

The fields *fs* and *ft* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of C.cond.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode, or if the condition code number is odd.

Operation:

```

if SNaN(ValueFPR(fs, fmt)) or SNaN(ValueFPR(ft, fmt)) or
   QNaN(ValueFPR(fs, fmt)) or QNaN(ValueFPR(ft, fmt)) then
   less ← false
   equal ← false
   unordered ← true
   if (SNaN(ValueFPR(fs, fmt)) or SNaN(ValueFPR(ft, fmt))) or
      (cond3 and (QNaN(ValueFPR(fs, fmt)) or QNaN(ValueFPR(ft, fmt)))) then
         SignalException(InvalidOperation)
      endif
   else
      less ← ValueFPR(fs, fmt) <fmt ValueFPR(ft, fmt)
      equal ← ValueFPR(fs, fmt) =fmt ValueFPR(ft, fmt)
      unordered ← false
   endif
endif

```

```

condition ← (cond2 and less) or (cond1 and equal)
      or (cond0 and unordered)
SetFPCConditionCode(cc, condition)

```

For c.cond.PS, the pseudo code above is repeated for both halves of the operand registers, treating each half as an independent single-precision values. Exceptions on the two halves are logically ORed and reported together. The results of the lower half comparison are written to condition code CC; the results of the upper half comparison are written to condition code CC+1.

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation, Invalid Operation

Programming Notes:

FP computational instructions, including compare, that receive an operand value of Signaling NaN raise the Invalid Operation condition. Comparisons that raise the Invalid Operation condition for Quiet NaNs in addition to SNaNs permit a simpler programming model if NaNs are errors. Using these compares, programs do not need explicit code to check for QNaNs causing the *unordered* relation. Instead, they take an exception and allow the exception handling system to deal with the error when it occurs. For example, consider a comparison in which we want to know if two numbers are equal, but for which *unordered* would be an error.

```

# comparisons using explicit tests for QNaN
  c.eq.d $f2,$f4    # check for equal
  nop
  bc1t  L2          # it is equal
  c.un.d $f2,$f4    # it is not equal,
                    # but might be unordered
  bc1t  ERROR       # unordered goes off to an error handler
# not-equal-case code here
  ...
# equal-case code here
L2:
# -----
# comparison using comparisons that signal QNaN
  c.seq.d $f2,$f4   # check for equal
  nop
  bc1t  L2          # it is equal
  nop
# it is not unordered here
  ...
# not-equal-case code here
  ...
# equal-case code here

```


31	26 25	21 20	16 15	12 11	0
POOL32B 001000	op	base	CACHE 0110	offset	

6 5 5 4 12

Format: CACHE op, offset(base)

microMIPS

Purpose: Perform Cache Operation


To perform the cache operation specified by op.

Description:

The 12-bit offset is sign-extended and added to the contents of the base register to form an effective address. The effective address is used in one of the following ways based on the operation to be performed and the type of cache as described in the following table.

Table 5.19 Usage of Effective Address

Operation Requires an	Type of Cache	Usage of Effective Address
Address	Virtual	The effective address is used to address the cache. An address translation may or may not be performed on the effective address (with the possibility that a TLB Refill or TLB Invalid exception might occur)
Address	Physical	The effective address is translated by the MMU to a physical address. The physical address is then used to address the cache
Index	N/A	<p>The effective address is translated by the MMU to a physical address. It is implementation dependent whether the effective address or the translated physical address is used to index the cache. As such, an unmapped address (such as within kseg0) should always be used for cache operations that require an index. See the Programming Notes section below.</p> <p>Assuming that the total cache size in bytes is CS, the associativity is A, and the number of bytes per tag is BPT, the following calculations give the fields of the address which specify the way and the index:</p> <pre> OffsetBit ← Log2(BPT) IndexBit ← Log2(CS / A) WayBit ← IndexBit + Ceiling(Log2(A)) Way ← Addr_{WayBit-1..IndexBit} Index ← Addr_{IndexBit-1..OffsetBit} </pre> <p>For a direct-mapped cache, the Way calculation is ignored and the Index value fully specifies the cache tag. This is shown symbolically in the figure below.</p>

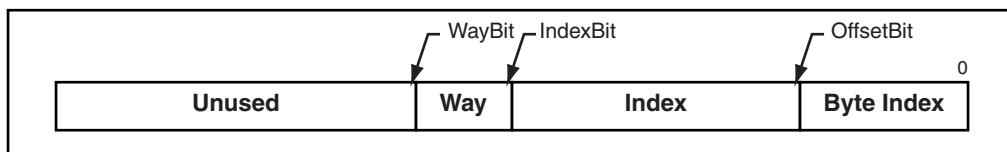Figure 5.2 Usage of Address Fields to Select Index and Way

A TLB Refill and TLB Invalid (both with cause code equal TLBL) exception can occur on any operation. For index operations (where the address is used to index the cache but need not match the cache tag) software should use unmapped addresses to avoid TLB exceptions. This instruction never causes TLB Modified exceptions nor TLB Refill exceptions with a cause code of TLBS. This instruction never causes Execute-Inhibit nor Read-Inhibit exceptions.

The effective address may be an arbitrarily-aligned by address. The CACHE instruction never causes an Address Error Exception due to an non-aligned address.

A Cache Error exception may occur as a by-product of some operations performed by this instruction. For example, if a Writeback operation detects a cache or bus error during the processing of the operation, that error is reported via a Cache Error exception. Similarly, a Bus Error Exception may occur if a bus operation invoked by this instruction is terminated in an error. However, cache error exceptions must not be triggered by an Index Load Tag or Index Store tag operation, as these operations are used for initialization and diagnostic purposes.

An Address Error Exception (with cause code equal AdEL) may occur if the effective address references a portion of the kernel address space which would normally result in such an exception. It is implementation dependent whether such an exception does occur.

It is implementation dependent whether a data watch is triggered by a cache instruction whose address matches the Watch register address match conditions.

The CACHE instruction and the memory transactions which are sourced by the CACHE instruction, such as cache refill or cache writeback, obey the ordering and completion rules of the SYNC instruction.

Bits [22:21] of the instruction specify the cache on which to perform the operation, as follows:

Table 5.20 Encoding of Bits[17:16] of CACHE Instruction

Code	Name	Cache
0b00	I	Primary Instruction
0b01	D	Primary Data or Unified Primary
0b10	T	Tertiary
0b11	S	Secondary

Bits [25:23] of the instruction specify the operation to perform. To provide software with a consistent base of cache operations, certain encodings must be supported on all processors. The remaining encodings are recommended

For implementations which implement multiple level of caches and where the hardware maintains the smaller cache as a proper subset of a larger cache (every address which is resident in the smaller cache is also resident in the larger cache; also known as the inclusion property), it is recommended that the CACHE instructions which operate on the larger, outer-level cache; should first operate on the smaller, inner-level cache. For example, a Hit_Writeback_Invalidate operation targeting the Secondary cache, should first operate on the primary data cache first. If the CACHE instruction implementation does not follow this policy then any software which flushes the caches must mimic this behavior. That is, the software sequences must first operate on the inner cache then operate on the outer cache. The software must place a SYNC instruction after the CACHE instruction whenever there are possible writebacks from the inner cache to ensure that the writeback data is resident in the outer cache before operating on the outer cache. If neither the CACHE instruction implementation nor the software cache flush sequence follow this policy, then the inclusion property of the caches can be broken, which might be a condition that the cache management hardware can not properly deal with.

For implementations which implement multiple level of caches without the inclusion property, the use of a SYNC instruction after the CACHE instruction is still needed whenever writeback data has to be resident in the next level of

memory hierarchy.

For multiprocessor implementations that maintain coherent caches, some of the Hit type of CACHE instruction operations may optionally affect all coherent caches within the implementation. If the effective address uses a coherent Cache Coherency Attribute (CCA), then the operation is *globalized*, meaning it is broadcast to all of the coherent caches within the system. If the effective address does not use one of the coherent CCAs, there is no broadcast of the operation. If multiple levels of caches are to be affected by one CACHE instruction, all of the affected cache levels must be processed in the same manner - either all affected cache levels use the globalized behavior or all affected cache levels use the non-globalized behavior.

Table 5.21 Encoding of Bits [20:18] of the CACHE Instruction

Code	Caches	Name	Effective Address Operand Type	Operation	Compliance Implemented
0b000	I	Index Invalidate	Index	<p>Set the state of the cache block at the specified index to invalid. This required encoding may be used by software to invalidate the entire instruction cache by stepping through all valid indices.</p>	Required
	D	Index Writeback Invalidate / Index Invalidate	Index	<p>For a write-back cache: If the state of the cache block at the specified index is valid and dirty, write the block back to the memory address specified by the cache tag. After that operation is completed, set the state of the cache block to invalid. If the block is valid but not dirty, set the state of the block to invalid.</p>	Required
	S, T	Index Writeback Invalidate / Index Invalidate	Index	<p>For a write-through cache: Set the state of the cache block at the specified index to invalid. This required encoding may be used by software to invalidate the entire data cache by stepping through all valid indices. Note that Index Store Tag should be used to initialize the cache at power up.</p>	Required if S, T cache is implemented
0b001	All	Index Load Tag	Index	<p>Read the tag for the cache block at the specified index into the <i>TagLo</i> and <i>TagHi</i> Coprocessor 0 registers. If the <i>DataLo</i> and <i>DataHi</i> registers are implemented, also read the data corresponding to the byte index into the <i>DataLo</i> and <i>DataHi</i> registers. This operation must not cause a Cache Error Exception. The granularity and alignment of the data read into the <i>DataLo</i> and <i>DataHi</i> registers is implementation-dependent, but is typically the result of an aligned access to the cache, ignoring the appropriate low-order bits of the byte index.</p>	Recommended

Table 5.21 Encoding of Bits [20:18] of the CACHE Instruction (Continued)

Code	Caches	Name	Effective Address Operand Type	Operation	Compliance Implemented
0b010	All	Index Store Tag	Index	Write the tag for the cache block at the specified index from the <i>TagLo</i> and <i>TagHi</i> Coprocessor 0 registers. This operation must not cause a Cache Error Exception. This required encoding may be used by software to initialize the entire instruction or data caches by stepping through all valid indices. Doing so requires that the <i>TagLo</i> and <i>TagHi</i> registers associated with the cache be initialized first.	Required
0b011	All	Implementation Dependent	Unspecified	Available for implementation-dependent operation.	Optional
0b100	I, D	Hit Invalidate	Address	If the cache block contains the specified address, set the state of the cache block to invalid. This required encoding may be used by software to invalidate a range of addresses from the instruction cache by stepping through the address range by the line size of the cache.	Required (Instruction Cache Encoding Only), Recommended otherwise
	S, T	Hit Invalidate	Address	In multiprocessor implementations with coherent caches, the operation may optionally be broadcast to all coherent caches within the system.	Optional, if Hit_Invalidate_D is implemented, the S and T variants are recommended.
0b101	I	Fill	Address	Fill the cache from the specified address.	Recommended
	D	Hit Writeback Invalidate / Hit Invalidate	Address	For a write-back cache: If the cache block contains the specified address and it is valid and dirty, write the contents back to memory. After that operation is completed, set the state of the cache block to invalid. If the block is valid but not dirty, set the state of the block to invalid. For a write-through cache: If the cache block contains the specified address, set the state of the cache block to invalid. This required encoding may be used by software to invalidate a range of addresses from the data cache by stepping through the address range by the line size of the cache.	Required
	S, T	Hit Writeback Invalidate / Hit Invalidate	Address	In multiprocessor implementations with coherent caches, the operation may optionally be broadcast to all coherent caches within the system.	Required if S, T cache is implemented

Table 5.21 Encoding of Bits [20:18] of the CACHE Instruction (Continued)

Code	Caches	Name	Effective Address Operand Type	Operation	Compliance Implemented
0b110	D	Hit Writeback	Address	If the cache block contains the specified address and it is valid and dirty, write the contents back to memory. After the operation is completed, leave the state of the line valid, but clear the dirty state. For a write-through cache, this operation may be treated as a nop.	Recommended
	S, T	Hit Writeback	Address	In multiprocessor implementations with coherent caches, the operation may optionally be broadcast to all coherent caches within the system.	Optional, if Hit_Writeback_D is implemented, the S and T variants are recommended.
0b111	I, D	Fetch and Lock	Address	If the cache does not contain the specified address, fill it from memory, performing a writeback if required, and set the state to valid and locked. If the cache already contains the specified address, set the state to locked. In set-associative or fully-associative caches, the way selected on a fill from memory is implementation dependent. The lock state may be cleared by executing an Index Invalidate, Index Writeback Invalidate, Hit Invalidate, or Hit Writeback Invalidate operation to the locked line, or via an Index Store Tag operation to the line that clears the lock bit. Note that clearing the lock state via Index Store Tag is dependent on the implementation-dependent cache tag and cache line organization, and that Index and Index Writeback Invalidate operations are dependent on cache line organization. Only Hit and Hit Writeback Invalidate operations are generally portable across implementations. It is implementation dependent whether a locked line is displaced as the result of an external invalidate or intervention that hits on the locked line. Software must not depend on the locked line remaining in the cache if an external invalidate or intervention would invalidate the line if it were not locked. It is implementation dependent whether a Fetch and Lock operation affects more than one line. For example, more than one line around the referenced address may be fetched and locked. It is recommended that only the single line containing the referenced address be affected.	Recommended

Restrictions:

The operation of this instruction is **UNDEFINED** for any operation/cache combination that is not implemented.

The operation of this instruction is **UNDEFINED** if the operation requires an address, and that address is uncachable.

The operation of the instruction is **UNPREDICTABLE** if the cache line that contains the CACHE instruction is the target of an invalidate or a writeback invalidate.

If this instruction is used to lock all ways of a cache at a specific cache index, the behavior of that cache to subsequent cache misses to that cache index is **UNDEFINED**.

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

Any use of this instruction that can cause cacheline writebacks should be followed by a subsequent SYNC instruction to avoid hazards where the writeback data is not yet visible at the next level of the memory hierarchy.

Operation:

```
vAddr ← GPR[base] + sign_extend(offset)
(pAddr, uncached) ← AddressTranslation(vAddr, DataReadReference)
CacheOp(op, vAddr, pAddr)
```

Exceptions:

TLB Refill Exception.

TLB Invalid Exception

Coprocessor Unusable Exception

Address Error Exception

Cache Error Exception

Bus Error Exception

Programming Notes:

For cache operations that require an index, it is implementation dependent whether the effective address or the translated physical address is used as the cache index. Therefore, the index value should always be converted to an unmapped address (such as an kseg0 address - by ORing the index with 0x80000000 before being used by the cache instruction). For example, the following code sequence performs a data cache Index Store Tag operation using the index passed in GPR a0:

```
li      a1, 0x80000000      /* Base of kseg0 segment */
or      a0, a0, a1          /* Convert index to kseg0 address */
cache  DCIndexStTag, 0(a1)  /* Perform the index store tag operation */
```

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	op	base	ST-EVA 1010	CACHEE 011	offset	

6 5 5 4 3 9

Format: CACHEE op, offset(base)

microMIPS

Purpose: Perform Cache Operation EVA

To perform the cache operation specified by op using a user mode virtual address while in kernel mode.


Description:

The 9 bit offset is sign-extended and added to the contents of the base register to form an effective address. The effective address is used in one of the following ways based on the operation to be performed and the type of cache as described in the following table.

Table 5.22 Usage of Effective Address

Operation Requires an	Type of Cache	Usage of Effective Address
Address	Virtual	The effective address is used to address the cache. An address translation may or may not be performed on the effective address (with the possibility that a TLB Refill or TLB Invalid exception might occur)
Address	Physical	The effective address is translated by the MMU to a physical address. The physical address is then used to address the cache
Index	N/A	<p>The effective address is translated by the MMU to a physical address. It is implementation dependent whether the effective address or the translated physical address is used to index the cache. As such, a kseg0 address should always be used for cache operations that require an index. See the Programming Notes section below.</p> <p>Assuming that the total cache size in bytes is CS, the associativity is A, and the number of bytes per tag is BPT, the following calculations give the fields of the address which specify the way and the index:</p> <pre> OffsetBit ← Log2(BPT) IndexBit ← Log2(CS / A) WayBit ← IndexBit + Ceiling(Log2(A)) Way ← Addr_{WayBit-1..IndexBit} Index ← Addr_{IndexBit-1..OffsetBit} </pre> <p>For a direct-mapped cache, the Way calculation is ignored and the Index value fully specifies the cache tag. This is shown symbolically in the figure below.</p>

Figure 5.3 Usage of Address Fields to Select Index and Way

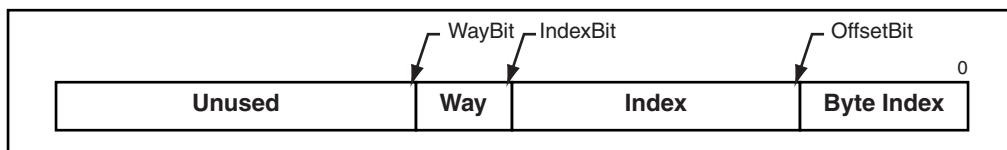

A TLB Refill and TLB Invalid (both with cause code equal TLBL) exception can occur on any operation. For index operations (where the address is used to index the cache but need not match the cache tag) software should use unmapped addresses to avoid TLB exceptions. This instruction never causes TLB Modified exceptions nor TLB Refill exceptions with a cause code of TLBS. This instruction never causes Execute-Inhibit nor Read-Inhibit exceptions.

The effective address may be an arbitrarily-aligned by address. The CACHEE instruction never causes an Address Error Exception due to an non-aligned address.

A Cache Error exception may occur as a by-product of some operations performed by this instruction. For example, if a Writeback operation detects a cache or bus error during the processing of the operation, that error is reported via a Cache Error exception. Similarly, a Bus Error Exception may occur if a bus operation invoked by this instruction is terminated in an error. However, cache error exceptions must not be triggered by an Index Load Tag or Index Store tag operation, as these operations are used for initialization and diagnostic purposes.

An Address Error Exception (with cause code equal AdEL) may occur if the effective address references a portion of the kernel address space which would normally result in such an exception. It is implementation dependent whether such an exception does occur.

It is implementation dependent whether a data watch is triggered by a cache instruction whose address matches the Watch register address match conditions.

The CACHEE instruction and the memory transactions which are sourced by the CACHEE instruction, such as cache refill or cache writeback, obey the ordering and completion rules of the SYNC instruction.

Bits [22:21] of the instruction specify the cache on which to perform the operation, as follows:

Table 5.23 Encoding of Bits[22:21] of CACHEE Instruction

Code	Name	Cache
0b00	I	Primary Instruction
0b01	D	Primary Data or Unified Primary
0b10	T	Tertiary
0b11	S	Secondary

Bits [25:23] of the instruction specify the operation to perform. To provide software with a consistent base of cache operations, certain encodings must be supported on all processors. The remaining encodings are recommended

For implementations which implement multiple level of caches and where the hardware maintains the smaller cache as a proper subset of a larger cache (every address which is resident in the smaller cache is also resident in the larger cache; also known as the inclusion property), it is recommended that the CACHEE instructions which operate on the larger, outer-level cache; should first operate on the smaller, inner-level cache. For example, a Hit_Writeback_Invalidate operation targeting the Secondary cache, should first operate on the primary data cache first. If the CACHEE instruction implementation does not follow this policy then any software which flushes the caches must mimic this behavior. That is, the software sequences must first operate on the inner cache then operate on the outer cache. The software must place a SYNC instruction after the CACHEE instruction whenever there are possible writebacks from the inner cache to ensure that the writeback data is resident in the outer cache before operating on the outer cache. If neither the CACHEE instruction implementation nor the software cache flush sequence follow this policy, then the inclusion property of the caches can be broken, which might be a condition that the cache management hardware can not properly deal with.

For implementations which implement multiple level of caches without the inclusion property, the use of a SYNC instruction after the CACHEE instruction is still needed whenever writeback data has to be resident in the next level

of memory hierarchy.

For multiprocessor implementations that maintain coherent caches, some of the Hit type of CACHEE instruction operations may optionally affect all coherent caches within the implementation. If the effective address uses a coherent Cache Coherency Attribute (CCA), then the operation is *globalized*, meaning it is broadcast to all of the coherent caches within the system. If the effective address does not use one of the coherent CCAs, there is no broadcast of the operation. If multiple levels of caches are to be affected by one CACHEE instruction, all of the affected cache levels must be processed in the same manner - either all affected cache levels use the globalized behavior or all affected cache levels use the non-globalized behavior.

The CACHEE instruction functions in exactly the same fashion as the CACHE instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the *Config5_{EVA}* field being set to one.

Table 5.24 Encoding of Bits [20:18] of the CACHEE Instruction

Code	Caches	Name	Effective Address Operand Type	Operation	Compliance Implemented
0b000	I	Index Invalidate	Index	<p>Set the state of the cache block at the specified index to invalid.</p> <p>This required encoding may be used by software to invalidate the entire instruction cache by stepping through all valid indices.</p>	Required
	D	Index Writeback Invalidate / Index Invalidate	Index	<p>For a write-back cache: If the state of the cache block at the specified index is valid and dirty, write the block back to the memory address specified by the cache tag. After that operation is completed, set the state of the cache block to invalid. If the block is valid but not dirty, set the state of the block to invalid.</p>	Required
	S, T	Index Writeback Invalidate / Index Invalidate	Index	<p>For a write-through cache: Set the state of the cache block at the specified index to invalid.</p> <p>This required encoding may be used by software to invalidate the entire data cache by stepping through all valid indices. Note that Index Store Tag should be used to initialize the cache at power up.</p>	Required if S, T cache is implemented

Table 5.24 Encoding of Bits [20:18] of the CACHEE Instruction (Continued)

Code	Caches	Name	Effective Address Operand Type	Operation	Compliance Implemented
0b001	All	Index Load Tag	Index	Read the tag for the cache block at the specified index into the <i>TagLo</i> and <i>TagHi</i> Coprocessor 0 registers. If the <i>DataLo</i> and <i>DataHi</i> registers are implemented, also read the data corresponding to the byte index into the <i>DataLo</i> and <i>DataHi</i> registers. This operation must not cause a Cache Error Exception. The granularity and alignment of the data read into the <i>DataLo</i> and <i>DataHi</i> registers is implementation-dependent, but is typically the result of an aligned access to the cache, ignoring the appropriate low-order bits of the byte index.	Recommended
0b010	All	Index Store Tag	Index	Write the tag for the cache block at the specified index from the <i>TagLo</i> and <i>TagHi</i> Coprocessor 0 registers. This operation must not cause a Cache Error Exception. This required encoding may be used by software to initialize the entire instruction or data caches by stepping through all valid indices. Doing so requires that the <i>TagLo</i> and <i>TagHi</i> registers associated with the cache be initialized first.	Required
0b011	All	Implementation Dependent	Unspecified	Available for implementation-dependent operation.	Optional
0b100	I, D	Hit Invalidate	Address	If the cache block contains the specified address, set the state of the cache block to invalid. This required encoding may be used by software to invalidate a range of addresses from the instruction cache by stepping through the address range by the line size of the cache.	Required (Instruction Cache Encoding Only), Recommended otherwise
	S, T	Hit Invalidate	Address	In multiprocessor implementations with coherent caches, the operation may optionally be broadcast to all coherent caches within the system.	Optional, if Hit_Invalidate_D is implemented, the S and T variants are recommended.

Table 5.24 Encoding of Bits [20:18] of the CACHEE Instruction (Continued)

Code	Caches	Name	Effective Address Operand Type	Operation	Compliance Implemented
0b101	I	Fill	Address	Fill the cache from the specified address.	Recommended
	D	Hit Writeback Invalidate / Hit Invalidate	Address	For a write-back cache: If the cache block contains the specified address and it is valid and dirty, write the contents back to memory. After that operation is completed, set the state of the cache block to invalid. If the block is valid but not dirty, set the state of the block to invalid. For a write-through cache: If the cache block contains the specified address, set the state of the cache block to invalid. This required encoding may be used by software to invalidate a range of addresses from the data cache by stepping through the address range by the line size of the cache.	Required
	S, T	Hit Writeback Invalidate / Hit Invalidate	Address	In multiprocessor implementations with coherent caches, the operation may optionally be broadcast to all coherent caches within the system.	Required if S, T cache is implemented
0b110	D	Hit Writeback	Address	If the cache block contains the specified address and it is valid and dirty, write the contents back to memory. After the operation is completed, leave the state of the line valid, but clear the dirty state. For a write-through cache, this operation may be treated as a nop.	Recommended
	S, T	Hit Writeback	Address	In multiprocessor implementations with coherent caches, the operation may optionally be broadcast to all coherent caches within the system.	Optional, if Hit_Writeback_D is implemented, the S and T variants are recommended.

Table 5.24 Encoding of Bits [20:18] of the CACHEE Instruction (Continued)

Code	Caches	Name	Effective Address Operand Type	Operation	Compliance Implemented
0b111	I, D	Fetch and Lock	Address	<p>If the cache does not contain the specified address, fill it from memory, performing a writeback if required, and set the state to valid and locked. If the cache already contains the specified address, set the state to locked. In set-associative or fully-associative caches, the way selected on a fill from memory is implementation dependent.</p> <p>The lock state may be cleared by executing an Index Invalidate, Index Writeback Invalidate, Hit Invalidate, or Hit Writeback Invalidate operation to the locked line, or via an Index Store Tag operation to the line that clears the lock bit. Note that clearing the lock state via Index Store Tag is dependent on the implementation-dependent cache tag and cache line organization, and that Index and Index Writeback Invalidate operations are dependent on cache line organization. Only Hit and Hit Writeback Invalidate operations are generally portable across implementations.</p> <p>It is implementation dependent whether a locked line is displaced as the result of an external invalidate or intervention that hits on the locked line. Software must not depend on the locked line remaining in the cache if an external invalidate or intervention would invalidate the line if it were not locked.</p> <p>It is implementation dependent whether a Fetch and Lock operation affects more than one line. For example, more than one line around the referenced address may be fetched and locked. It is recommended that only the single line containing the referenced address be affected.</p>	Recommended

Restrictions:

The operation of this instruction is **UNDEFINED** for any operation/cache combination that is not implemented.

The operation of this instruction is **UNDEFINED** if the operation requires an address, and that address is uncachable.

The operation of the instruction is **UNPREDICTABLE** if the cache line that contains the CACHEE instruction is the target of an invalidate or a writeback invalidate.

If this instruction is used to lock all ways of a cache at a specific cache index, the behavior of that cache to subsequent cache misses to that cache index is **UNDEFINED**.

Any use of this instruction that can cause cacheline writebacks should be followed by a subsequent SYNC instruction to avoid hazards where the writeback data is not yet visible at the next level of the memory hierarchy.

Only usable when access to Coprocessor0 is enabled and when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```
vAddr ← GPR[base] + sign_extend(offset)
(pAddr, uncached) ← AddressTranslation(vAddr, DataReadReference)
CacheOp(op, vAddr, pAddr)
```

Exceptions:

TLB Refill Exception.
TLB Invalid Exception
Coprocessor Unusable Exception
Reserved Instruction
Address Error Exception
Cache Error Exception
Bus Error Exception

Programming Notes:

For cache operations that require an index, it is implementation dependent whether the effective address or the translated physical address is used as the cache index. Therefore, the index value should always be converted to a kseg0 address by ORing the index with 0x80000000 before being used by the cache instruction. For example, the following code sequence performs a data cache Index Store Tag operation using the index passed in GPR a0:

```
li      a1, 0x80000000      /* Base of kseg0 segment */
or      a0, a0, a1          /* Convert index to kseg0 address */
cache  DCIndexStTag, 0(a1)  /* Perform the index store tag operation */
```

31	26 25	22 21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	CEIL.L 01001100	POOL32FXf 111011

6 5 5 1 1 8 6

Format: CEIL.L fmtCEIL.L.S ft, fs
CEIL.L.D ft, fsmicroMIPS
microMIPS**Purpose:** Fixed Point Ceiling Convert to Long Fixed Point

To convert an FP value to 64-bit fixed point, rounding up

Description: `FPR[ft] ← convert_and_round(FPR[fs])`The value in FPR *fs*, in format *fmt*, is converted to a value in 64-bit long fixed point format and rounding toward $+\infty$ (rounding mode 2). The result is placed in FPR *ft*.When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{63} to $2^{63}-1$, the result cannot be represented correctly, an IEEE Invalid Operation condition exists, and the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation *Enable* bit is set in the *FCSR*, no result is written to *fd* and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{63}-1$, is written to *fd*.**Restrictions:**The fields *fs* and *ft* must specify valid FPRs; *fs* for type *fmt* and *fd* for long fixed point; if they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**`StoreFPR(ft, L, ConvertFmt(ValueFPR(fs, fmt), fmt, L))`**Exceptions:**

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact

31	26 25	22 21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fm t	CEIL.W 01101100	POOL32FXf 111011

6 5 5 1 1 8 6

Format: CEIL.W(fmt)CEIL.W.S ft, fs
CEIL.W.D ft, fsmicroMIPS
microMIPS**Purpose:** Floating Point Ceiling Convert to Word Fixed Point

To convert an FP value to 32-bit fixed point, rounding up

Description: FPR[ft] \leftarrow convert_and_round(FPR[fs])The value in FPR fs, in format fmt, is converted to a value in 32-bit word fixed point format and rounding toward $+\infty$ (rounding mode 2). The result is placed in FPR ft.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{31} to $2^{31}-1$, the result cannot be represented correctly, an IEEE Invalid Operation condition exists, and the Invalid Operation flag is set in the FCSR. If the Invalid Operation Enable bit is set in the FCSR, no result is written to fd and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{31}-1$, is written to fd.

Restrictions:

The fields fs and fd must specify valid FPRs; fs for type fmt and fd for word fixed point; if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format fmt; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

Operation:

```
StoreFPR(ft, W, ConvertFmt(ValueFPR(fs, fmt), fmt, W))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	CFC1 01000000	POOL32FXf 111011

Format: CFC1 rt, fs

microMIPS

Purpose: Move Control Word From Floating Point

To copy a word from an FPU control register to a GPR

Description: GPR[rt] \leftarrow FP_Control[fs]

Copy the 32-bit word from FP (coprocessor 1) control register fs into GPR rt, sign-extending it to 64 bits.

Restrictions:

There are a few control registers defined for the floating point unit. The result is **UNPREDICTABLE** if fs specifies a register that does not exist.

Operation:

```

if fs = 0 then
    temp  $\leftarrow$  FIR
elseif fs = 25 then
    temp  $\leftarrow$  024 || FCSR31..25 || FCSR23
elseif fs = 26 then
    temp  $\leftarrow$  014 || FCSR17..12 || 05 || FCSR6..2 || 02
elseif fs = 28 then
    temp  $\leftarrow$  020 || FCSR11..7 || 04 || FCSR24 || FCSR1..0
elseif fs = 31 then
    temp  $\leftarrow$  FCSR
else
    temp  $\leftarrow$  UNPREDICTABLE
endif
GPR[rt]  $\leftarrow$  sign_extend(temp)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Historical Information:

For the MIPS I, II and III architectures, the contents of GPR rt are **UNPREDICTABLE** for the instruction immediately following CFC1.

MIPS V and MIPS32 introduced the three control registers that access portions of FCSR. These registers were not available in MIPS I, II, III, or IV.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	CFC2 1100110100	POOL32AXf 111100	6

Format: CFC2 rt, Impl

microMIPS

The syntax shown above is an example using CFC1 as a model. The specific syntax is implementation dependent.

Purpose: Move Control Word From Coprocessor 2

To copy a word from a Coprocessor 2 control register to a GPR

Description: GPR[rt] \leftarrow CP2CCR[Impl]

Copy the 32-bit word from the Coprocessor 2 control register denoted by the *Impl* field, sign-extending it to 64 bits. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The result is **UNPREDICTABLE** if *Impl* specifies a register that does not exist.

Operation:

```
temp  $\leftarrow$  CP2CCR[Impl]
GPR[rt]  $\leftarrow$  sign_extend(temp)
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	CLO 0100101100	POOL32AXf 111100	6

Format: CLO rt, rs**microMIPS****Purpose:** Count Leading Ones in Word

To count the number of leading ones in a word

Description: GPR[rt] \leftarrow count_leading_ones GPR[rs]Bits 31..0 of GPR rs are scanned from most significant to least significant bit. The number of leading ones is counted and the result is written to GPR rt. If all of bits **31..0** were set in GPR rs, the result written to GPR rt is 32.**Restrictions:**If GPR rs does not contain a sign-extended 32-bit value (bits **63..31** equal), then the results of the operation are **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp  $\leftarrow$  32
for i in 31 .. 0
    if GPR[rs]i = 0 then
        temp  $\leftarrow$  31 - i
        break
    endif
endfor
GPR[rt]  $\leftarrow$  temp

```

Exceptions:

None

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	CLZ 0101101100	POOL32AXf 111100	6

Format: CLZ rt, rs**microMIPS****Purpose:** Count Leading Zeros in Word

Count the number of leading zeros in a word

Description: GPR[rt] \leftarrow count_leading_zeros GPR[rs]Bits **31..0** of GPR rs are scanned from most significant to least significant bit. The number of leading zeros is counted and the result is written to GPR rt. If no bits were set in GPR rs, the result written to GPR rt is 32.**Restrictions:**If GPR rs does not contain a sign-extended 32-bit value (bits **63..31** equal), then the results of the operation are **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
temp  $\leftarrow$  32
for i in 31 .. 0
    if GPR[rs]i = 1 then
        temp  $\leftarrow$  31 - i
        break
    endif
endfor
GPR[rt]  $\leftarrow$  temp

```

Exceptions:

None

31	26 25		3 2 0
POOL32A 000000	cofun		COP2 010

6 23 3

Format: COP2 func**microMIPS****Purpose:** Coprocessor Operation to Coprocessor 2

To perform an operation to Coprocessor 2

Description: `CoprocessorOperation(2, cofun)`

An implementation-dependent operation is performed to Coprocessor 2, with the *cofun* value passed as an argument. The operation may specify and reference internal coprocessor registers, and may change the state of the coprocessor conditions, but does not modify state within the processor. Details of coprocessor operation and internal state are described in the documentation for each Coprocessor 2 implementation.

Restrictions:**Operation:**`CoprocessorOperation(2, cofun)`**Exceptions:**

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	CTC1 01100000	POOL32FXf 111011

Format: CTC1 rt, fs

microMIPS

Purpose: Move Control Word to Floating Point

To copy a word from a GPR to an FPU control register

Description: FP_Control[fs] \leftarrow GPR[rt]Copy the low word from GPR *rt* into the FP (coprocessor 1) control register indicated by *fs*.

Writing to the floating point *Control/Status* register, the *FCSR*, causes the appropriate exception if any *Cause* bit and its corresponding *Enable* bit are both set. The register is written before the exception occurs. Writing to *FEXR* to set a cause bit whose enable bit is already set, or writing to *FENR* to set an enable bit whose cause bit is already set causes the appropriate exception. The register is written before the exception occurs and the *EPC* register contains the address of the CTC1 instruction.

Restrictions:

There are a few control registers defined for the floating point unit. The result is **UNPREDICTABLE** if *fs* specifies a register that does not exist.

Operation:

```

temp  $\leftarrow$  GPR[rt]31..0
if fs = 25 then /* FCCR */
    if temp31..8  $\neq$  024 then
        UNPREDICTABLE
    else
        FCSR  $\leftarrow$  temp7..1 || FCSR24 || temp0 || FCSR22..0
    endif
elseif fs = 26 then /* FEXR */
    if temp31..18  $\neq$  0 or temp11..7  $\neq$  0 or temp2..0  $\neq$  0 then
        UNPREDICTABLE
    else
        FCSR  $\leftarrow$  FCSR31..18 || temp17..12 || FCSR11..7 ||
            temp6..2 || FCSR1..0
    endif
elseif fs = 28 then /* FENR */
    if temp31..12  $\neq$  0 or temp6..3  $\neq$  0 then
        UNPREDICTABLE
    else
        FCSR  $\leftarrow$  FCSR31..25 || temp2 || FCSR23..12 || temp11..7
            || FCSR6..2 || temp1..0
    endif
elseif fs = 31 then /* FCSR */
    if (FCSRImpl field is not implemented) and (temp22..18  $\neq$  0) then
        UNPREDICTABLE
    elseif (FCSRImpl field is implemented) and temp20..18  $\neq$  0 then
        UNPREDICTABLE
    else
        FCSR  $\leftarrow$  temp
    endif
else

```

```
UNPREDICTABLE
endif
CheckFPEexception()
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation, Invalid Operation, Division-by-zero, Inexact, Overflow, Underflow

Historical Information:

For the MIPS I, II and III architectures, the contents of floating point control register *fs* are **UNPREDICTABLE** for the instruction immediately following CTC1.

MIPS V and MIPS32 introduced the three control registers that access portions of FCSR. These registers were not available in MIPS I, II, III, or IV.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	CTC2 1101110100	POOL32AXf 111100	6

Format: CTC2 rt, Impl

microMIPS

The syntax shown above is an example using CTC1 as a model. The specific syntax is implementation dependent.

Purpose: Move Control Word to Coprocessor 2

To copy a word from a GPR to a Coprocessor 2 control register

Description: CP2CCR[Impl] \leftarrow GPR[rt]

Copy the low word from GPR *rt* into the Coprocessor 2 control register denoted by the *Impl* field. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The result is **UNPREDICTABLE** if *rd* specifies a register that does not exist.

Operation:

```
temp  $\leftarrow$  GPR[rt]31..0
CP2CCR[Impl]  $\leftarrow$  temp
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

31	26 25	21 20	16 15 14 13 12	6 5	0
POOL32F 010101	ft	fs	0 fmt	CVT.D 1001101	POOL32FXf 111011

6 5 5 1 2 7 6

Format: CVT.D fmt
 CVT.D.S ft, fs
 CVT.D.W ft, fs
 CVT.D.L ft, fs

microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Convert to Double Floating Point

To convert an FP or fixed point value to double FP

Description: `FPR[ft] ← convert_and_round(FPR[fs])`

The value in FPR *fs*, in format *fmt*, is converted to a value in double floating point format and rounded according to the current rounding mode in *FCSR*. The result is placed in FPR *ft*. If *fmt* is S or W, then the operation is always exact.

Restrictions:

The fields *fs* and *ft* must specify valid FPRs—*fs* for type *fmt* and *ft* for double floating point—if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

For CVT.D.L, the result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
StoreFPR (ft, D, ConvertFmt(ValueFPR(fs, fmt), fmt, D))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact

31	26 25	21 20	16 15 14 13		6 5	0
POOL32F 010101	ft	fs	0 fmt	CVT.L 00000100	POOL32FXf 111011	6

Format: CVT.L fmt
 CVT.L.S ft, fs
 CVT.L.D ft, fs

microMIPS
 microMIPS

Purpose: Floating Point Convert to Long Fixed Point

To convert an FP value to a 64-bit fixed point

Description: FPR[ft] \leftarrow convert_and_round(FPR[fs])

Convert the value in format *fmt* in FPR *fs* to long fixed point format and round according to the current rounding mode in *FCSR*. The result is placed in FPR *ft*.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{63} to $2^{63}-1$, the result cannot be represented correctly, an IEEE Invalid Operation condition exists, and the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation *Enable* bit is set in the *FCSR*, no result is written to *fd* and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{63}-1$, is written to *fd*.

Restrictions:

The fields *fs* and *ft* must specify valid FPRs—*fs* for type *fmt* and *fd* for long fixed point—if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

StoreFPR (ft, L, ConvertFmt(ValueFPR(fs, fmt), fmt, L))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact,

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	ft	fs	fd	00	CVT.PS.S 110000000


6 5 5 5 2 9

Format: CVT.PS.S fd, fs, ft**microMIPS****Purpose:** Floating Point Convert Pair to Paired Single

To convert two FP values to a paired single value

Description: FPR[fd] \leftarrow FPR[fs]_{31..0} || FPR[ft]_{31..0}

The single-precision values in FPR fs and ft are written into FPR fd as a paired-single value. The value in FPR fs is written into the upper half, and the value in FPR ft is written into the lower half.

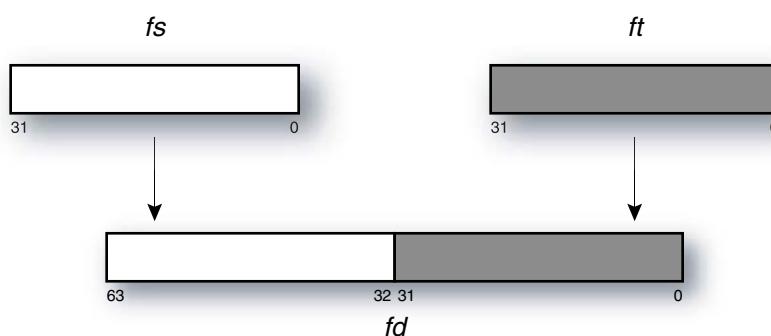

CVT.PS.S is similar to PLL.PS, except that it expects operands of format S instead of PS.

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields *fs* and *ft* must specify FPRs valid for operands of type S; if they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format S; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**

StoreFPR(fd, S, ValueFPR(fs, S) || ValueFPR(ft, S))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation

31	26 25	21 20	16 15 14 13 12	6 5	0
POOL32F 010101	ft	fs	0 fmt	CVT.S 1101101	POOL32FXf 111011

Format: CVT.S fmt
 CVT.S.D ft, fs
 CVT.S.W ft, fs
 CVT.S.L ft, fs

microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Convert to Single Floating Point

To convert an FP or fixed point value to single FP

Description: `FPR[ft] ← convert_and_round(FPR[fs])`

The value in FPR *fs*, in format *fmt*, is converted to a value in single floating point format and rounded according to the current rounding mode in *FCSR*. The result is placed in FPR *ft*.

Restrictions:

The fields *fs* and *ft* must specify valid FPRs—*fs* for type *fmt* and *fd* for single floating point. If they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

For CVT.S.L, the result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

`StoreFPR(ft, S, ConvertFmt(ValueFPR(fs, fmt), fmt, S))`

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact, Overflow, Underflow

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	CVT.S.PL 10000100	POOL32FXf 111011

Format: CVT.S.PL ft, fs

microMIPS

Purpose:

Floating Point Convert Pair Lower to Single Floating Point

To convert one half of a paired single FP value to single FP

Description: FPR[ft] \leftarrow FPR[fs]_{31..0}

The lower paired single value in FPR fs, in format PS, is converted to a value in single floating point format. The result is placed in FPR ft. This instruction can be used to isolate the lower half of a paired single value.

The operation is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:

The fields fs and ft must specify valid FPRs—fs for type PS and ft for single floating point. If they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format PS; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of CVT.S.PL is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
StoreFPR (ft, S, ConvertFmt(ValueFPR(fs, PS), PL, S))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	CVT.S.PU 10100100	POOL32FXf 111011

Format: CVT.S.PU ft, fs**microMIPS****Purpose:** Floating Point Convert Pair Upper to Single Floating Point

To convert one half of a paired single FP value to single FP

Description: FPR[ft] \leftarrow FPR[fs]_{63..32}

The upper paired single value in FPR fs, in format PS, is converted to a value in single floating point format. The result is placed in FPR ft. This instruction can be used to isolate the upper half of a paired single value.

The operation is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields fs and ft must specify valid FPRs—fs for type PS and ft for single floating point. If they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format PS; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.The result of CVT.S.PU is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**

StoreFPR (ft, S, ConvertFmt(ValueFPR(fs, PS), PU, S))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	CVT.W 00100100	POOL32FXf 111011

Format: CVT.W(fmt)
 CVT.W.S ft, fs
 CVT.W.D ft, fs

microMIPS
 microMIPS

Purpose: Floating Point Convert to Word Fixed Point

To convert an FP value to 32-bit fixed point

Description: `FPR[ft] ← convert_and_round(FPR[fs])`

The value in FPR *fs*, in format *fmt*, is converted to a value in 32-bit word fixed point format and rounded according to the current rounding mode in *FCSR*. The result is placed in FPR *ft*.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{31} to $2^{31}-1$, the result cannot be represented correctly, an IEEE Invalid Operation condition exists, and the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation *Enable* bit is set in the *FCSR*, no result is written to *fd* and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{31}-1$, is written to *ft*.

Restrictions:

The fields *fs* and *ft* must specify valid FPRs—*fs* for type *fmt* and *ft* for word fixed point—if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

Operation:

`StoreFPR(ft, W, ConvertFmt(ValueFPR(fs, fmt), fmt, W))`

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact

Doubleword Add

DADD

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	0	DADD 100010000

Format: DADD rd, rs, rt

microMIPS64

Purpose: Doubleword Add

To add 64-bit integers. If overflow occurs, then trap.

Description: $GPR[rd] \leftarrow GPR[rs] + GPR[rt]$

The 64-bit doubleword value in GPR *rt* is added to the 64-bit value in GPR *rs* to produce a 64-bit result. If the addition results in 64-bit 2's complement arithmetic overflow, then the destination register is not modified and an Integer Overflow exception occurs. If it does not overflow, the 64-bit result is placed into GPR *rd*.

Restrictions:

Operation:

```
temp ← (GPR[rs]63 || GPR[rs]) + (GPR[rt]63 || GPR[rt])
if (temp64 ≠ temp63) then
    SignalException(IntegerOverflow)
else
    GPR[rd] ← temp63..0
endif
```

Exceptions:

Integer Overflow, Reserved Instruction

Programming Notes:

DADDU performs the same arithmetic operation but does not trap on overflow.

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	immediate	DADDI 011100	5

Format: DADDI rt, rs, immediate

microMIPS64

Purpose: Doubleword Add Immediate

To add a constant to a 64-bit integer. If overflow occurs, then trap.

Description: $GPR[rt] \leftarrow GPR[rs] + \text{immediate}$

The 10-bit signed *immediate* is added to the 64-bit value in GPR *rs* to produce a 64-bit result. If the addition results in 64-bit 2's complement arithmetic overflow, then the destination register is not modified and an Integer Overflow exception occurs. If it does not overflow, the 64-bit result is placed into GPR *rt*.

Restrictions:

Operation:

```
temp ← (GPR[rs]63 || GPR[rs]) + sign_extend(immediate)
if (temp64 ≠ temp63) then
    SignalException(IntegerOverflow)
else
    GPR[rt] ← temp63..0
endif
```

Exceptions:

Integer Overflow, Reserved Instruction

Programming Notes:

DADDIU performs the same arithmetic operation but does not trap on overflow.

31	26 25	21 20	16 15	0
DADDIU 010111	rt	rs	immediate	

6 5 5 16

Format: DADDIU rt, rs, immediate**microMIPS64****Purpose:** Doubleword Add Immediate Unsigned

To add a constant to a 64-bit integer

Description: $GPR[rt] \leftarrow GPR[rs] + \text{immediate}$ The 16-bit signed *immediate* is added to the 64-bit value in GPR *rs* and the 64-bit arithmetic result is placed into GPR *rt*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:**Operation:**
$$GPR[rt] \leftarrow GPR[rs] + \text{sign_extend(immediate)}$$
Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	0	DADDU 101010000

Format: DADDU rd, rs, rt

microMIPS64

Purpose: Doubleword Add Unsigned

To add 64-bit integers

Description: $GPR[rd] \leftarrow GPR[rs] + GPR[rt]$

The 64-bit doubleword value in GPR *rt* is added to the 64-bit value in GPR *rs* and the 64-bit arithmetic result is placed into GPR *rd*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:

Operation:

$GPR[rd] \leftarrow GPR[rs] + GPR[rt]$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DCLO 0100101100	POOL32SXf 111100	6

Format: DCLO rd, rs

microMIPS64

Purpose: Count Leading Ones in Doubleword

To count the number of leading ones in a doubleword

Description: GPR[rd] \leftarrow count_leading_ones GPR[rs]

The 64-bit word in GPR rs is scanned from most-significant to least-significant bit. The number of leading ones is counted and the result is written to GPR rd. If all 64 bits were set in GPR rs, the result written to GPR rd is 64.

Restrictions:

To be compliant with the MIPS32 and MIPS64 Architecture, software must place the same GPR number in both the rt and rd fields of the instruction. The operation of the instruction is **UNPREDICTABLE** if the rt and rd fields of the instruction contain different values.

Operation:

```
temp <- 64
for i in 63.. 0
    if GPR[rs]i = 0 then
        temp <- 63 - i
        break
    endif
endfor
GPR[rd] <- temp
```

Exceptions:

None

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DCLZ 0101101100	POOL32SXf 111100	6

Format: DCLZ rd, rs**microMIPS64****Purpose:** Count Leading Zeros in Doubleword

To count the number of leading zeros in a doubleword

Description: GPR[rd] \leftarrow count_leading_zeros GPR[rs]

The 64-bit word in GPR rs is scanned from most significant to least significant bit. The number of leading zeros is counted and the result is written to GPR rd. If no bits were set in GPR rs, the result written to GPR rd is 64.

Restrictions:To be compliant with the MIPS32 and MIPS64 Architecture, software must place the same GPR number in both the rt and rd fields of the instruction. The operation of the instruction is **UNPREDICTABLE** if the rt and rd fields of the instruction contain different values.**Operation:**

```

temp <- 64
for i in 63.. 0
    if GPR[rs]i = 1 then
        temp <- 63 - i
        break
    endif
endfor
GPR[rd] <- temp

```

Exceptions:

None

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DDIV 1010101100	POOL32SXf 111100	6

Format: DDIV rs, rt

microMIPS64

Purpose: Doubleword Divide

To divide 64-bit signed integers

Description: $(LO, HI) \leftarrow GPR[rs] / GPR[rt]$

The 64-bit doubleword in GPR *rs* is divided by the 64-bit doubleword in GPR *rt*, treating both operands as signed values. The 64-bit quotient is placed into special register *LO* and the 64-bit remainder is placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

If the divisor in GPR *rt* is zero, the arithmetic result value is **UNPREDICTABLE**.

Operation:

```
LO ← GPR[rs] div GPR[rt]
HI ← GPR[rs] mod GPR[rt]
```

Exceptions:

Reserved Instruction

Programming Notes:

See “Programming Notes” for the [DIV](#) instruction.

Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DDIVU 1011101100	POOL32SXf 111100	6

Format: DDIVU rs, rt

microMIPS64

Purpose: Doubleword Divide Unsigned

To divide 64-bit unsigned integers

Description: $(LO, HI) \leftarrow GPR[rs] / GPR[rt]$

The 64-bit doubleword in GPR *rs* is divided by the 64-bit doubleword in GPR *rt*, treating both operands as unsigned values. The 64-bit quotient is placed into special register *LO* and the 64-bit remainder is placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

If the divisor in GPR *rt* is zero, the arithmetic result value is **UNPREDICTABLE**.

Operation:

```

q ← (0 || GPR[rs]) div (0 || GPR[rt])
r ← (0 || GPR[rs]) mod (0 || GPR[rt])
LO ← q63..0
HI ← r63..0

```

Exceptions:

Reserved Instruction

Programming Notes:

See “Programming Notes” for the [DIV](#) instruction.

Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *Hi* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

31	26 25	16 15	6 5	0
POOL32A 000000	0 0000000000	DERET 1110001101	POOL32AXf 111100	6

Format: DERET**EJTAG microMIPS****Purpose:** Debug Exception Return

To Return from a debug exception.

Description:

DERET clears execution and instruction hazards, returns from Debug Mode and resumes non-debug execution at the instruction whose address is contained in the *DEPC* register. DERET does not execute the next instruction (i.e. it has no delay slot).

Restrictions:

A DERET placed between an LL and SC instruction does not cause the SC to fail.

If the *DEPC* register with the return address for the DERET was modified by an MTC0 or a DMTC0 instruction, a CP0 hazard exists that must be removed via software insertion of the appropriate number of SSNOP instructions (for implementations of Release 1 of the Architecture) or by an EHB, or other execution hazard clearing instruction (for implementations of Release 2 of the Architecture).

DERET implements a software barrier that resolves all execution and instruction hazards created by Coprocessor 0 state changes (for Release 2 implementations, refer to the SYNC1 instruction for additional information on resolving instruction hazards created by writing the instruction stream). The effects of this barrier are seen starting with the instruction fetch and decode of the instruction at the PC to which the DERET returns.

This instruction is legal only if the processor is executing in Debug Mode. The operation of the processor is **UNDEFINED** if a DERET is executed in the delay slot of a branch or jump instruction.

Operation:

```

DebugDM ← 0
DebugIEXI ← 0
if IsMIPS16Implemented() || (Config3ISA > 0) then
    PC ← DEPC63..1 || 0
    ISAMode ← DEPC0
else
    PC ← DEPC
endif
ClearHazards()

```

Exceptions:

Coprocessor Unusable Exception
 Reserved Instruction Exception

31	26 25	21 20	16 15	11 10	6 5	0
POOL32S 010110	rt	rs	msbd	lsb	DEXT 101100	

6 5 5 5 5 5

Format: DEXT rt, rs, pos, size

microMIPS64

Purpose: Doubleword Extract Bit Field

To extract a bit field from GPR rs and store it right-justified into GPR rt.

Description: $\text{GPR}[rt] \leftarrow \text{ExtractField}(\text{GPR}[rs], \text{msbd}, \text{lsb})$

The bit field starting at bit pos and extending for $size$ bits is extracted from GPR rs and stored zero-extended and right-justified in GPR rt . The assembly language arguments pos and $size$ are converted by the assembler to the instruction fields $msbd$ (the most significant bit of the destination field in GPR rt), in instruction bits **15..11**, and lsb (least significant bit of the source field in GPR rs), in instruction bits **10..6**, as follows:


```
msbd ← size-1
lsb ← pos
msb ← lsb+msbd
```

For this instruction, the values of pos and $size$ must satisfy all of the following relations:

```
0 ≤ pos < 32
0 < size ≤ 32
0 < pos+size ≤ 63
```

Figure 3-3 shows the symbolic operation of the instruction.

Figure 5.4 Operation of the DEXT Instruction

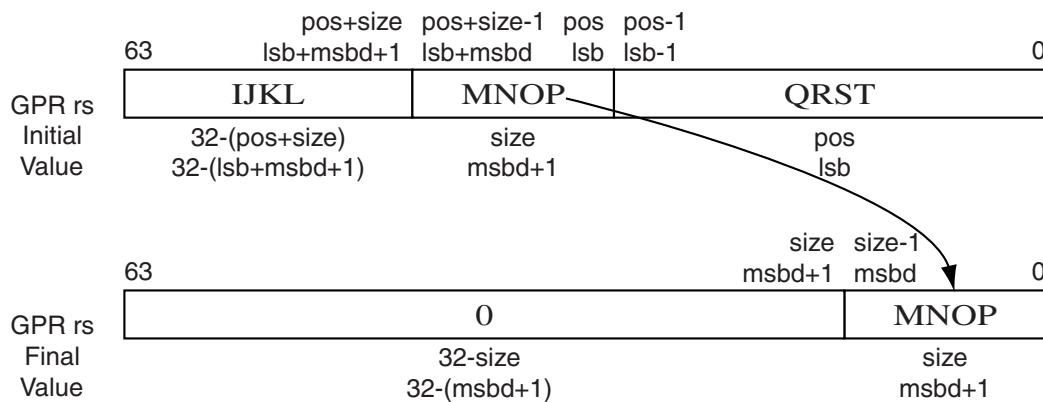

Three instructions are required to access any legal bit field within the doubleword, as a function of the msb (as derived from $msbd$ and lsb) and lsb of the field (which implies restrictions on pos and $size$), as follows:

msbd	lsb	msb	pos	size	Instruction	Comment
$0 \leq msbd < 32$	$0 \leq lsb < 32$	$0 \leq msb < 63$	$0 \leq pos < 32$	$1 \leq size \leq 32$	DEXT	The field is 32 bits or less and starts in the right-most word of the doubleword
$0 \leq msbd < 32$	$32 \leq lsb < 64$	$32 \leq msb < 64$	$32 \leq pos < 64$	$1 \leq size \leq 32$	DEXTU	The field is 32 bits or less and starts in the left-most word of the doubleword
$32 \leq msbd <$	$0 \leq lsb < 32$	$32 \leq msb < 64$	$0 \leq pos < 32$	$32 < size \leq 64$	DEXTM	The field is larger than 32 bits and starts in the right-most word of the doubleword

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Because of the limits on the values of *msbd* and *lsb*, there is no **UNPREDICTABLE** case for this instruction.

Operation:
$$\text{GPR}[rt] \leftarrow 0^{63-(\text{msbd}+1)} \mid\mid \text{GPR}[rs]_{\text{msbd}+1\text{sb..lsb}}$$
Exceptions:

Reserved Instruction

Programming Notes

The assembler will accept any value of *pos* and *size* that satisfies the relationship $0 < pos + size \leq 64$ and emit DEXT, DEXTM, or DEXTU as appropriate to the values. Programmers should always specify the DEXT mnemonic and let the assembler select the instruction to use.

31	26 25	21 20	16 15	11 10	6 5	0
POOL32S 010110	rt	rs	msbd	lsb	DEXTM 100100	

6 5 5 5 5 5 5

Format: DEXTM rt, rs, pos, size

microMIPS

Purpose: Doubleword Extract Bit Field Middle

To extract a bit field from GPR rs and store it right-justified into GPR rt.

Description: $\text{GPR}[rt] \leftarrow \text{ExtractField}(\text{GPR}[rs], \text{msbd}, \text{lsb})$

The bit field starting at bit *pos* and extending for *size* bits is extracted from GPR rs and stored zero-extended and right-justified in GPR rt. The assembly language arguments *pos* and *size* are converted by the assembler to the instruction fields *msbdminus32* (the most significant bit of the destination field in GPR rt, minus 32), in instruction bits 15..11, and *lsb* (least significant bit of the source field in GPR rs), in instruction bits 10..6, as follows:


```
msbdminus32 ← size-1-32
lsb ← pos
msbd ← msbdminus32 + 32
msb ← lsb+msbd
```

For this instruction, the values of *pos* and *size* must satisfy all of the following relations:

```
0 ≤ pos < 32
32 < size ≤ 64
32 < pos+size ≤ 64
```

Figure 3-4 shows the symbolic operation of the instruction.

Figure 5.5 Operation of the DEXTM Instruction

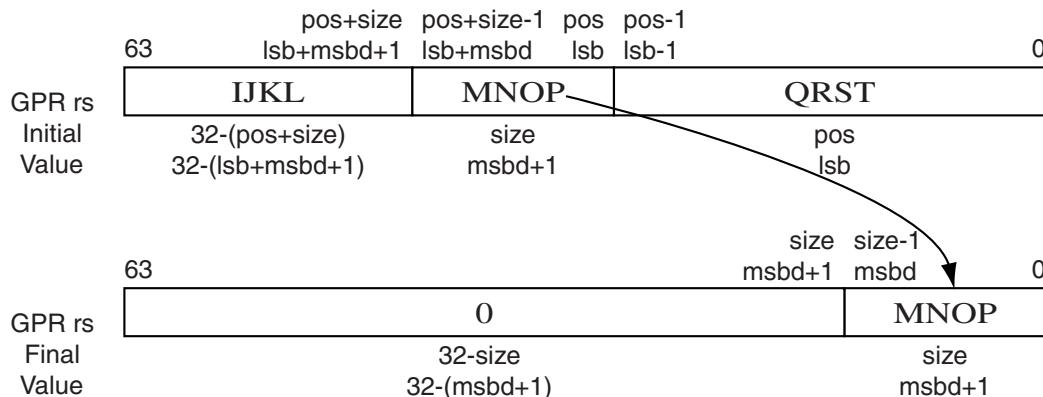

Three instructions are required to access any legal bit field within the doubleword, as a function of the *msb* (as derived from *msbd* and *lsb*) and *lsb* of the field (which implies restrictions on *pos* and *size*), as follows:

msbd	lsb	msb	pos	size	Instruction	Comment
$0 \leq msbd < 32$	$0 \leq lsb < 32$	$0 \leq msb < 63$	$0 \leq pos < 32$	$1 \leq size \leq 32$	DEXT	The field is 32 bits or less and starts in the right-most word of the doubleword
$0 \leq msbd < 32$	$32 \leq lsb < 64$	$32 \leq msb < 64$	$32 \leq pos < 64$	$1 \leq size \leq 32$	DEXTU	The field is 32 bits or less and starts in the left-most word of the doubleword

msbd	lsb	msb	pos	size	Instruction	Comment
$32 \leq msbd < 64$	$0 \leq lsb < 32$	$32 \leq msb < 64$	$0 \leq pos < 32$	$32 < size \leq 64$	DEXTM	The field is larger than 32 bits and starts in the right-most word of the doubleword

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The operation is **UNPREDICTABLE** if $(lsb + msbd + 1) > 64$.

Operation:

```
msbd ← msbdminus32 + 32
if ((lsb + msbd + 1) > 64) then
    UNPREDICTABLE
endif
GPR[rt] ← 063-(msbd+1) || GPR[rs]msbd+lsb..pos
```

Exceptions:

Reserved Instruction

Programming Notes

The assembler will accept any value of *pos* and *size* that satisfies the relationship $0 < pos+size \leq 64$ and emit DEXT, DEXTM, or DEXTU as appropriate to the values. Programmers should always specify the DEXT mnemonic and let the assembler select the instruction to use.

31	26 25	21 20	16 15	11 10	6 5	0
POOL32S 010110	rt	rs	msbd	lsb	DEXTU 010100	

Format: DEXTU rt, rs, pos, size

microMIPS64

Purpose: Doubleword Extract Bit Field Upper

To extract a bit field from GPR *rs* and store it right-justified into GPR *rt*.

Description: $\text{GPR}[rt] \leftarrow \text{ExtractField}(\text{GPR}[rs], \text{msbd}, \text{lsb})$

The bit field starting at bit *pos* and extending for *size* bits is extracted from GPR *rs* and stored zero-extended and right-justified in GPR *rt*. The assembly language arguments *pos* and *size* are converted by the assembler to the instruction fields *msbd* (the most significant bit of the destination field in GPR *rt*), in instruction bits 15..11, and *lsbminus32* (least significant bit of the source field in GPR *rs*, minus32), in instruction bits 10..6, as follows:


```
msbd ← size-1
lsbminus32 ← pos-32
lsb ← lsbminus32 + 32
msb ← lsb+msbd
```

For this instruction, the values of *pos* and *size* must satisfy all of the following relations:

```
32 ≤ pos < 64
0 < size ≤ 32
32 < pos+size ≤ 64
```

Figure 3-5 shows the symbolic operation of the instruction.

Figure 5.6 Operation of the DEXTU Instruction

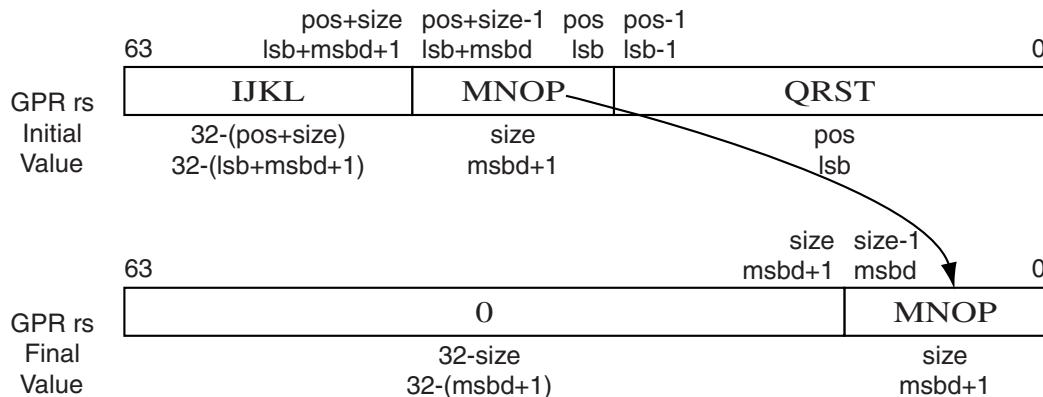

Three instructions are required to access any legal bit field within the doubleword, as a function of the *msb* (as derived from *msbd* and *lsb*) and *lsb* of the field (which implies restrictions on *pos* and *size*), as follows:

msbd	lsb	msb	pos	size	Instruction	Comment
$0 \leq msbd < 32$	$0 \leq lsb < 32$	$0 \leq msb < 63$	$0 \leq pos < 32$	$1 \leq size \leq 32$	DEXT	The field is 32 bits or less and starts in the right-most word of the doubleword
$0 \leq msbd < 32$	$32 \leq lsb < 64$	$32 \leq msb < 64$	$32 \leq pos < 64$	$1 \leq size \leq 32$	DEXTU	The field is 32 bits or less and starts in the left-most word of the doubleword

msbd	lsb	msb	pos	size	Instruction	Comment
$32 \leq msbd < 64$	$0 \leq lsb < 32$	$32 \leq msb < 64$	$0 \leq pos < 32$	$32 < size \leq 64$	DEXTM	The field is larger than 32 bits and starts in the right-most word of the doubleword

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The operation is **UNPREDICTABLE** if $(lsb + msbd + 1) > 64$.

Operation:

```

lsb ← lsbminus32 + 32
if ((lsb + msbd + 1) > 64) then
    UNPREDICTABLE
endif
GPR[rt] ← 063-(msbd+1) || GPR[rs]msbd+lsb..pos

```

Exceptions:

Reserved Instruction

Programming Notes

The assembler will accept any value of *pos* and *size* that satisfies the relationship $0 < pos+size \leq 64$ and emit DEXT, DEXTM, or DEXTU as appropriate to the values. Programmers should always specify the DEXT mnemonic and let the assembler select the instruction to use.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	0 00000	rs	DI 0100011101	POOL32AXf 111100	6

Format: DI
DI rs

microMIPS
microMIPS

Purpose: Disable Interrupts

To return the previous value of the *Status* register and disable interrupts. If DI is specified without an argument, GPR r0 is implied, which discards the previous value of the Status register.

Description: $\text{GPR}[rs] \leftarrow \text{Status}; \text{Status}_{IE} \leftarrow 0$

The current value of the *Status* register is sign-extended and loaded into general register *rs*. The Interrupt Enable (IE) bit in the *Status* register is then cleared.

Restrictions:

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Operation:

```
data ← Status
GPR[rs] ← sign_extend(data)
StatusIE ← 0
```

Exceptions:

Coprocessor Unusable

Reserved Instruction (Release 1 implementations)

Programming Notes:

The effects of this instruction are identical to those accomplished by the sequence of reading *Status* into a GPR, clearing the IE bit, and writing the result back to *Status*. Unlike the multiple instruction sequence, however, the DI instruction can not be aborted in the middle by an interrupt or exception.

This instruction creates an execution hazard between the change to the Status register and the point where the change to the interrupt enable takes effect. This hazard is cleared by the EHB, JALR.HB, JR.HB, or ERET instructions. Software must not assume that a fixed latency will clear the execution hazard.

31	26 25	21 20	16 15	11 10	6 5	0
POOL32S 010110	rt	rs	msbd	lsb	DINS 001100	

6 5 5 5 5 5 5

Format: DINS rt, rs, pos, size

microMIPS64

Purpose: Doubleword Insert Bit Field

To merge a right-justified bit field from GPR *rs* into a specified position in GPR *rt*.

Description: $\text{GPR}[rt] \leftarrow \text{InsertField}(\text{GPR}[rt], \text{GPR}[rs], \text{msb}, \text{lsb})$

The right-most *size* bits from GPR *rs* are merged into the value from GPR *rt* starting at bit position *pos*. The result is placed back in GPR *rt*. The assembly language arguments *pos* and *size* are converted by the assembler to the instruction fields *msb* (the most significant bit of the field), in instruction bits **15..11**, and *lsb* (least significant bit of the field), in instruction bits **10..6**, as follows:


```
msb ← pos+size-1
lsb ← pos
```

For this instruction, the values of *pos* and *size* must satisfy all of the following relations:

```
0 ≤ pos < 32
0 < size ≤ 32
0 < pos+size ≤ 32
```

Figure 3-6 shows the symbolic operation of the instruction.

Figure 5.7 Operation of the DINS Instruction

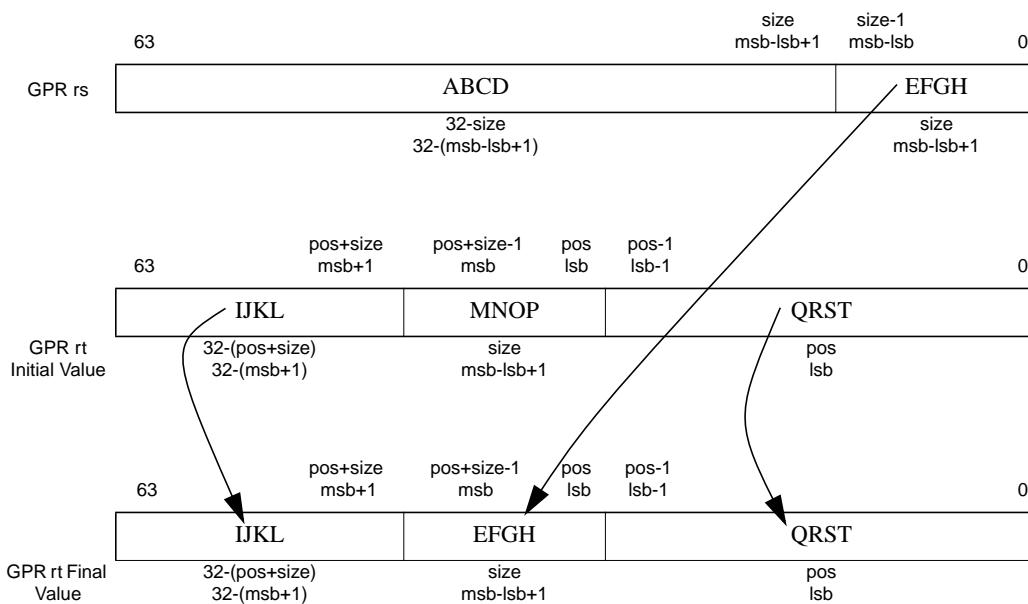

Three instructions are required to access any legal bit field within the doubleword, as a function of the *msb* and *lsb* of the field (which implies restrictions on *pos* and *size*), as follows:

msb	lsb	pos	size	Instruction	Comment
$0 \leq msb < 32$	$0 \leq lsb < 32$	$0 \leq pos < 32$	$1 \leq size \leq 32$	DINS	The field is entirely contained in the right-most word of the doubleword
$32 \leq msb < 64$	$0 \leq lsb < 32$	$0 \leq pos < 32$	$2 \leq size \leq 64$	DINSM	The field straddles the words of the doubleword
$32 \leq msb < 64$	$32 \leq lsb < 64$	$32 \leq pos < 64$	$1 \leq size \leq 32$	DINSU	The field is entirely contained in the left-most word of the doubleword

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The operation is **UNPREDICTABLE** if $lsb > msb$.

Operation:

```
if (lsb > msb) then
    UNPREDICTABLE
endif
GPR[rt] ← GPR[rt]63..msb+1 || GPR[rs]msb-lsb..0 || GPR[rt]lsb-1..0
```

Exceptions:

Reserved Instruction

Programming Notes

The assembler will accept any value of pos and $size$ that satisfies the relationship $0 < pos+size \leq 64$ and emit DINS, DINSM, or DINSU as appropriate to the values. Programmers should always specify the DINS mnemonic and let the assembler select the instruction to use.

31	26..25	21..20	16..15	11..10	6..5	0
POOL32S 010110	rt	rs	msbd	lsb	DINSM 000100	

6 5 5 5 5 5 5

Format: DINSM rt, rs, pos, size

microMIPS64

Purpose: Doubleword Insert Bit Field Middle

To merge a right-justified bit field from GPR *rs* into a specified position in GPR *rt*.

Description: $\text{GPR}[rt] \leftarrow \text{InsertField}(\text{GPR}[rt], \text{GPR}[rs], \text{msb}, \text{lsb})$

The right-most *size* bits from GPR *rs* are inserted into the value from GPR *rt* starting at bit position *pos*. The result is placed back in GPR *rt*. The assembly language arguments *pos* and *size* are converted by the assembler to the instruction fields *msbminus32* (the most significant bit of the field, minus 32), in instruction bits 15..11, and *lsb* (least significant bit of the field), in instruction bits 10..6, as follows:


```
msbminus32 ← pos+size-1-32
lsb ← pos
msb ← msbminus32 + 32
```

For this instruction, the values of *pos* and *size* must satisfy all of the following relations:

```
0 ≤ pos < 32
2 ≤ size ≤ 64
32 < pos+size ≤ 64
```

Figure 3-7 shows the symbolic operation of the instruction.

Figure 5.8 Operation of the DINSM Instruction

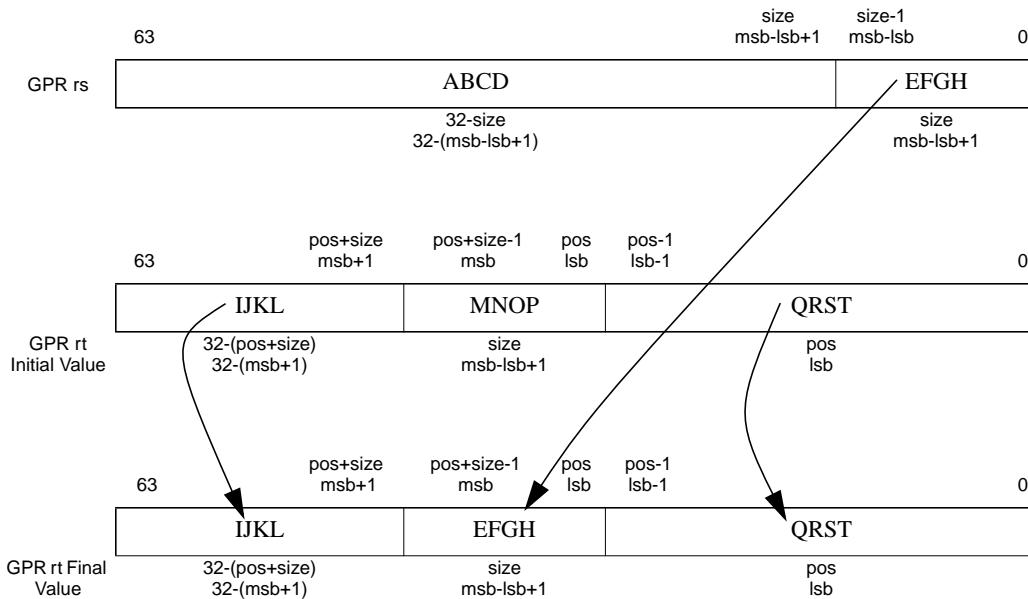

Three instructions are required to access any legal bit field within the doubleword, as a function of the *msb* and *lsb* of the field (which implies restrictions on *pos* and *size*), as follows:

msb	lsb	pos	size	Instruction	Comment
$0 \leq msb < 32$	$0 \leq lsb < 32$	$0 \leq pos < 32$	$1 \leq size \leq 32$	DINS	The field is entirely contained in the right-most word of the doubleword
$32 \leq msb < 64$	$0 \leq lsb < 32$	$0 \leq pos < 32$	$2 \leq size \leq 64$	DINSM	The field straddles the words of the doubleword
$32 \leq msb < 64$	$32 \leq lsb < 64$	$32 \leq pos < 64$	$1 \leq size \leq 32$	DINSU	The field is entirely contained in the left-most word of the doubleword

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Because of the instruction format, *lsb* can never be greater than *msb*, so there is no **UNPREDICATABLE** case for this instruction.

Operation:

```
msb ← msbminus32 + 32
GPR[rt] ← GPR[rt]63..msb+1 || GPR[rs]msb-lsb..0 || GPR[rt]lsb-1..0
```

Exceptions:

Reserved Instruction

Programming Notes

The assembler will accept any value of *pos* and *size* that satisfies the relationship $0 < pos+size \leq 64$ and emit DINS, DINSM, or DINSU as appropriate to the values. Programmers should always specify the DINS mnemonic and let the assembler select the instruction to use.

31	26..25	21..20	16..15	10..9	6..5	0
POOL32S 010110	rt	rs	msbd	lsb	DINSU 110100	

6 5 5 5 5 5

Format: DINSU rt, rs, pos, size

microMIPS64

Purpose: Doubleword Insert Bit Field Upper

To merge a right-justified bit field from GPR *rs* into a specified position in GPR *rt*.

Description: $\text{GPR}[rt] \leftarrow \text{InsertField}(\text{GPR}[rt], \text{GPR}[rs], \text{msb}, \text{lsb})$

The right-most *size* bits from GPR *rs* are inserted into the value from GPR *rt* starting at bit position *pos*. The result is placed back in GPR *rt*. The assembly language arguments *pos* and *size* are converted by the assembler to the instruction fields *msbminus32* (the most significant bit of the field, minus 32), in instruction bits 15..11, and *lsbminus32* (least significant bit of the field, minus 32), in instruction bits 10..6, as follows:


```
msbminus32 ← pos+size-1-32
lsbminus32 ← pos-32
msb ← msbminus32 + 32
lsb ← lsbminus32 + 32
```

For this instruction, the values of *pos* and *size* must satisfy all of the following relations:

```
32 ≤ pos < 64
1 ≤ size ≤ 32
32 < pos+size ≤ 64
```

Figure 3-8 shows the symbolic operation of the instruction.

Figure 5.9 Operation of the DINSU Instruction

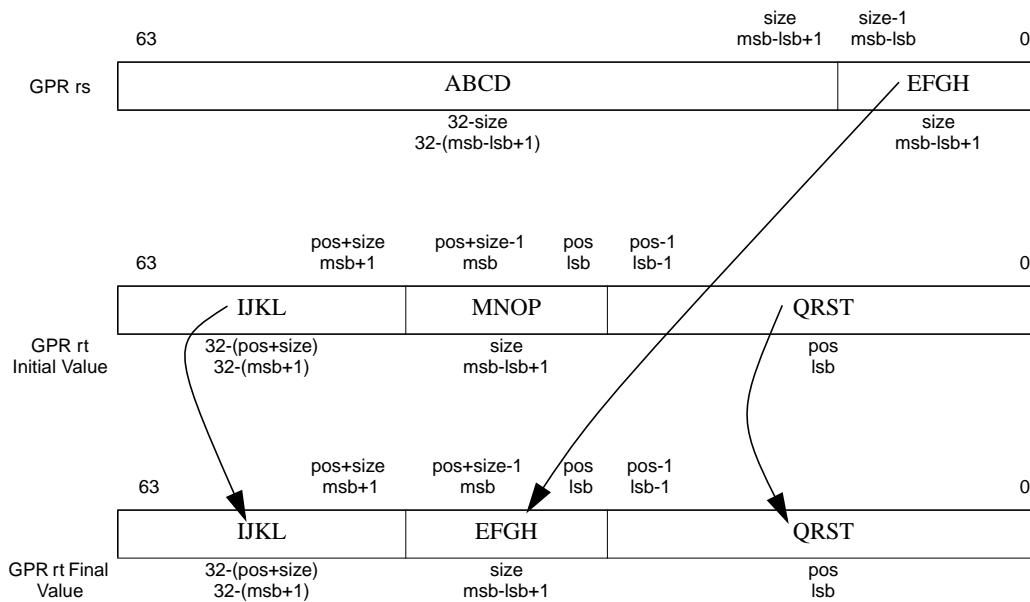

Three instructions are required to access any legal bit field within the doubleword, as a function of the *msb* and *lsb* of the field (which implies restrictions on *pos* and *size*), as follows:

msb	lsb	pos	size	Instruction	Comment
$0 \leq msb < 32$	$0 \leq lsb < 32$	$0 \leq pos < 32$	$1 \leq size \leq 32$	DINS	The field is entirely contained in the right-most word of the doubleword
$32 \leq msb < 64$	$0 \leq lsb < 32$	$0 \leq pos < 32$	$2 \leq size \leq 64$	DINSM	The field straddles the words of the doubleword
$32 \leq msb < 64$	$32 \leq lsb < 64$	$32 \leq pos < 64$	$1 \leq size \leq 32$	DINSU	The field is entirely contained in the left-most word of the doubleword

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The operation is **UNPREDICTABLE** if $lsb > msb$.

Operation:

```

lsb ← lsbminus32 + 32
msb ← msbminus32 + 32
if (lsb > msb) then
    UNPREDICTABLE
endif
GPR[rt] ← GPR[rt]63..msb+1 || GPR[rs]msb-lsb..0 || GPR[rt]lsb-1..0

```

Exceptions:

Reserved Instruction

Programming Notes

The assembler will accept any value of pos and $size$ that satisfies the relationship $0 < pos+size \leq 64$ and emit DINS, DINSM, or DINSU as appropriate to the values. Programmers should always specify the DINS mnemonic and let the assembler select the instruction to use.

31	26 25	21 20	16 15	5	0
POOL32A 000000	rt	rs	DIV 1010101100	POOL32Ax 111100	6

Format: DIV rs, rt

microMIPS

Purpose: Divide Word

To divide a 32-bit signed integers

Description: $(HI, LO) \leftarrow GPR[rs] / GPR[rt]$

The 32-bit word value in GPR *rs* is divided by the 32-bit value in GPR *rt*, treating both operands as signed values. The 32-bit quotient is sign-extended and placed into special register *LO* and the 32-bit remainder is sign-extended and placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

If either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

If the divisor in GPR *rt* is zero, the arithmetic result value is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[rs]) or NotWordValue(GPR[rt])) then
    UNPREDICTABLE
endif
q  ← GPR[rs]31..0 div GPR[rt]31..0
LO ← sign_extend(q31..0)
r  ← GPR[rs]31..0 mod GPR[rt]31..0
HI ← sign_extend(r31..0)

```

Exceptions:

None

Programming Notes:

No arithmetic exception occurs under any circumstances. If divide-by-zero or overflow conditions are detected and some action taken, then the divide instruction is typically followed by additional instructions to check for a zero divisor and/or for overflow. If the divide is asynchronous then the zero-divisor check can execute in parallel with the divide. The action taken on either divide-by-zero or overflow is either a convention within the program itself, or more typically within the system software; one possibility is to take a BREAK exception with a *code* field value to signal the problem to the system software.

As an example, the C programming language in a UNIX® environment expects division by zero to either terminate the program or execute a program-specified signal handler. C does not expect overflow to cause any exceptional condition. If the C compiler uses a divide instruction, it also emits code to test for a zero divisor and execute a BREAK instruction to inform the operating system if a zero is detected.

By default, most compilers for the MIPS architecture will emit additional instructions to check for the divide-by-zero and overflow cases when this instruction is used. In many compilers, the assembler mnemonic “DIV r0, rs, rt” can be used to prevent these additional test instructions to be emitted.

In some processors the integer divide operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are

ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the divide so that other instructions can execute in parallel.

Historical Perspective:

In MIPS I through MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

31	26 25	21 20	16 15	11 10 9 8 7	5	0
POOL32F 010101	ft	fs	fd	0 fmt	DIV 11110000	8

Format: DIV(fmt
DIV.S fd, fs, ft
DIV.D fd, fs, ft)

microMIPS
microMIPS

Purpose: Floating Point Divide

To divide FP values

Description: $FPR[fd] \leftarrow FPR[fs] / FPR[ft]$

The value in FPR *fs* is divided by the value in FPR *ft*. The result is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, and placed into FPR *fd*. The operands and result are values in format *fmt*.

Restrictions:

The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

Operation:

StoreFPR (fd, fmt, ValueFPR(fs, fmt) / ValueFPR(ft, fmt))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Invalid Operation, Unimplemented Operation, Division-by-zero, Overflow, Underflow

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	DIVU 1011101100	POOL32AXf 111100	6

Format: DIVU rs, rt

microMIPS

Purpose: Divide Unsigned Word

To divide a 32-bit unsigned integers

Description: $(HI, LO) \leftarrow GPR[rs] / GPR[rt]$

The 32-bit word value in GPR *rs* is divided by the 32-bit value in GPR *rt*, treating both operands as unsigned values. The 32-bit quotient is sign-extended and placed into special register *LO* and the 32-bit remainder is sign-extended and placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

If either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits **63..31** equal), then the result of the operation is **UNPREDICTABLE**.

If the divisor in GPR *rt* is zero, the arithmetic result value is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[rs]) or NotWordValue(GPR[rt])) then
    UNPREDICTABLE
endif
q  ← (0 || GPR[rs]31..0) div (0 || GPR[rt]31..0)
r  ← (0 || GPR[rs]31..0) mod (0 || GPR[rt]31..0)
LO ← sign_extend(q31..0)
HI ← sign_extend(r31..0)

```

Exceptions:

None

Programming Notes:

See “Programming Notes” for the [DIV](#) instruction.

Historical Perspective:

In MIPS I through MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

31	26 25	21 20	16 15 14	12 11 10	6 5	0
POOL32S 010110	rt	rs	00	sel	DMFC0 00011	POOL32Sxf 111100

6 5 5 2 3 5 6

Format: DMFC0 rt, rs
DMFC0 rt, rs, sel

microMIPS64
microMIPS64

Purpose:

Doubleword Move from Coprocessor 0

To move the contents of a coprocessor 0 register to a general purpose register (GPR).

Description: $GPR[rt] \leftarrow CPR[0, rs, sel]$

The contents of the coprocessor 0 register are loaded into GPR *rt*. Note that not all coprocessor 0 registers support the *sel* field. In those instances, the *sel* field must be zero.

Restrictions:

The results are **UNDEFINED** if coprocessor 0 does not contain a register as specified by *rs* and *sel*, or if the coprocessor 0 register specified by *rd* and *sel* is a 32-bit register.

Operation:

```
datadoubleword ← CPR[0, rs, sel]
GPR[rt] ← datadoubleword
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	DMFC1 10010000	POOL32Fxf 111011

Format: DMFC1 rt,fs

microMIPS64

Purpose: Doubleword Move from Floating Point

To move a doubleword from an FPR to a GPR.

Description: GPR[rt] \leftarrow FPR[fs]

The contents of FPR fs are loaded into GPR rt.

Restrictions:

Operation:

```
datadoubleword  $\leftarrow$  ValueFPR(fs, UNINTERPRETED_DOUBLEWORD)
GPR[rt]  $\leftarrow$  datadoubleword
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

Historical Information:

For MIPS III, the contents of GPR rt are undefined for the instruction immediately following DMFC1.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	DMFC2 0110110100	POOL32Axf 111100	6

Format: DMFC2 rt, rd
DMFC2, rt, rd, sel

microMIPS64
microMIPS64

The syntax shown above is an example using DMFC1 as a model. The specific syntax is implementation dependent.

Purpose: Doubleword Move from Coprocessor 2

To move a doubleword from a coprocessor 2 register to a GPR.

Description: $GPR[rt] \leftarrow CP2CPR[Impl]$

The contents of the coprocessor 2 register denoted by the *Impl* field is loaded into GPR *rt*. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The results are **UNPREDICTABLE** if *Impl* specifies a coprocessor 2 register that does not exist, or if the coprocessor 2 register specified by *rd* and *sel* is a 32-bit register.

Operation:

```
datadoubleword ← CP2CPR[Impl]
GPR[rt] ← datadoubleword
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14	12 11 10	6 5	0
POOL32S 010110	rt	rs	0 00	sel	DMTC0 01011	POOL32Sxf 111100

Format: DMTC0 rt, rs
DMTC0 rt, rs, sel

microMIPS64
microMIPS64

Purpose: Doubleword Move to Coprocessor 0

To move a doubleword from a GPR to a coprocessor 0 register.

Description: $CPR[0,rs,sel] \leftarrow GPR[rt]$

The contents of GPR *rt* are loaded into the coprocessor 0 register specified in the *rd* and *sel* fields. Note that not all coprocessor 0 registers support the *sel* field. In those instances, the *sel* field must be zero.

Restrictions:

The results are **UNDEFINED** if coprocessor 0 does not contain a register as specified by *rs* and *sel*, or if the coprocessor 0 register specified by *rd* and *sel* is a 32-bit register.

Operation:

```
datadoubleword ← GPR[rt]
CPR[0,rs,sel] ← datadoubleword
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	DMTC1 10110000	POOL32Fxf 111011

Format: DMTC1 rt, fs**microMIPS64****Purpose:** Doubleword Move to Floating Point

To copy a doubleword from a GPR to an FPR

Description: FPR[fs] \leftarrow GPR[rt]The doubleword contents of GPR *rt* are placed into FPR *fs*.**Restrictions:****Operation:**

```
datadoubleword  $\leftarrow$  GPR[rt]
StoreFPR(fs, UNINTERPRETED_DOUBLEWORD, datadoubleword)
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

Historical Information:For MIPS III, the contents of FPR *fs* are undefined for the instruction immediately following DMTC1.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	DMTC2 0111110100	POOL32Axf 000011	6

Format: DMTC2 rt, Impl
DMTC2 rt, Impl, sel

microMIPS64
microMIPS64

The syntax shown above is an example using DMTC1 as a model. The specific syntax is implementation dependent.

Purpose: Doubleword Move to Coprocessor 2

To move a doubleword from a GPR to a coprocessor 2 register.

Description: CPR[2, rd, sel] \leftarrow GPR[rt]

The contents GPR *rt* are loaded into the coprocessor 2 register denoted by the *Impl* field. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The results are **UNPREDICTABLE** if *Impl* specifies a coprocessor 2 register that does not exist, or if the coprocessor 2 register specified by *rd* and *sel* is a 32-bit register.

Operation:

```
datadoubleword  $\leftarrow$  GPR[rt]
CP2CPR[Impl]  $\leftarrow$  datadoubleword
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DMULT 1000101100	POOL32SXf 111100	6

Format: DMULT rs, rt

microMIPS64

Purpose: Doubleword Multiply

To multiply 64-bit signed integers

Description: $(LO, HI) \leftarrow GPR[rs] \times GPR[rt]$

The 64-bit doubleword value in GPR *rt* is multiplied by the 64-bit value in GPR *rs*, treating both operands as signed values, to produce a 128-bit result. The low-order 64-bit doubleword of the result is placed into special register *LO*, and the high-order 64-bit doubleword is placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

Operation:

```
prod ← GPR[rs] × GPR[rt]
LO ← prod63..0
HI ← prod127..64
```

Exceptions:

Reserved Instruction

Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and all subsequent levels of the architecture.

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DMULT 1001101100	POOL32SXf 111100	6

Format: DMULTU rs, rt

microMIPS64

Purpose: Doubleword Multiply Unsigned

To multiply 64-bit unsigned integers

Description: $(LO, HI) \leftarrow GPR[rs] \times GPR[rt]$

The 64-bit doubleword value in GPR *rt* is multiplied by the 64-bit value in GPR *rs*, treating both operands as unsigned values, to produce a 128-bit result. The low-order 64-bit doubleword of the result is placed into special register *LO*, and the high-order 64-bit doubleword is placed into special register *HI*. No arithmetic exception occurs under any circumstances.

Restrictions:

Operation:

```
prod ← (0 | GPR[rs]) × (0 | GPR[rt])
LO ← prod63..0
HI ← prod127..64
```

Exceptions:

Reserved Instruction

Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and all subsequent levels of the architecture.

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	sa	00	DROTR 011000000

Format: DROTR rt, rs, sa**microMIPS64****Purpose:** Doubleword Rotate Right

To execute a logical right-rotate of a doubleword by a fixed amount—0 to 31 bits

Description: $GPR[rt] \leftarrow GPR[rs] \leftrightarrow (\text{right}) sa$ The doubleword contents of GPR *rs* are rotated right; the result is placed in GPR *rt*. The bit-rotate amount in the range 0 to 31 is specified by *sa*.**Restrictions:****Operation:**

$$\begin{aligned} s &\leftarrow 0 \mid\mid sa \\ GPR[rt] &\leftarrow GPR[rs]_{s-1..0} \mid\mid GPR[rs]_{63..s} \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	saminus32	0	DROTR32 011001000

6 5 5 5 2 9

Format: DROTR32 rt, rs, sa**microMIPS64****Purpose:** Doubleword Rotate Right Plus 32

To execute a logical right-rotate of a doubleword by a fixed amount—32 to 63 bits

Description: $GPR[rt] \leftarrow GPR[rs] \leftrightarrow (\text{right}) (saminus32+32)$ The 64-bit doubleword contents of GPR *rs* are rotated right; the result is placed in GPR *rt*. The bit-rotate amount in the range 32 to 63 is specified by *saminus32+32*.**Restrictions:****Operation:**

$$\begin{aligned} s &\leftarrow 1 \mid\mid sa \quad /* 32+saminus32 */ \\ GPR[rt] &\leftarrow GPR[rs]_{s-1..0} \mid\mid GPR[rt]_{63..s} \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	0	DROTRV 011010000

6 5 5 5 2 9

Format: DROTRV rd, rt, rs**microMIPS64****Purpose:** Doubleword Rotate Right Variable

To execute a logical right-rotate of a doubleword by a variable number of bits

Description: GPR[rd] \leftarrow GPR[rt] \leftrightarrow (right) GPR[rs]

The 64-bit doubleword contents of GPR rt are rotated right; the result is placed in GPR rd. The bit-rotate amount in the range 0 to 63 is specified by the low-order 6 bits in GPR rs.

Restrictions:**Operation:**

$$\begin{array}{ll} s & \leftarrow \text{GPR}[rs]_{5..0} \\ \text{GPR}[rd] & \leftarrow \text{GPR}[rt]_{s-1..0} \quad || \quad \text{GPR}[rt]_{63..s} \end{array}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DSBH 0111101100	POOL32Sxf 111100	6

Format: DSBH rt, rs**microMIPS64****Purpose:** Doubleword Swap Bytes Within Halfwords

To swap the bytes within each halfword of GPR *rs* and store the value into GPR *rt*.

Description: $\text{GPR}[\text{rt}] \leftarrow \text{SwapBytesWithinHalfwords}(\text{GPR}[\text{rs}])$

Within each halfword of GPR *rs* the bytes are swapped and stored in GPR *rt*.

Restrictions:

In implementations Release 1 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Operation:

```
GPR[rt] ← GPR[s]55..48 || GPR[s]63..56 || GPR[s]39..32 || GPR[s]47..40 ||  
GPR[s]23..16 || GPR[s]31..24 || GPR[s]7..0 || GPR[s]15..8
```

Exceptions:

Reserved Instruction

Programming Notes:

The DSBH and DSHD instructions can be used to convert doubleword data of one endianness to the other endianness. For example:

```
ld      t0, 0(a1)          /* Read doubleword value */  
dsbh   t0, t0              /* Convert endianness of the halfwords */  
dshd   t0, t0              /* Swap the halfwords within the doublewords */
```


31	26 25	21 20	16 15	6 5	0
POOL32S 010110	rt	rs	DSHD 1111101100	POOL32SXf 111100	6

Format: DSHD rt, rs**microMIPS64****Purpose:** Doubleword Swap Halfwords Within Doublewords

To swap the halfwords of GPR *rs* and store the value into GPR *rt*.

Description: $\text{GPR}[\text{rt}] \leftarrow \text{SwapHalfwordsWithinDoublewords}(\text{GPR}[\text{rs}])$

The halfwords of GPR *rs* are swapped and stored in GPR *rt*.

Restrictions:

In implementations of Release 1 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Operation:

```
GPR[rt] ← GPR[rs]15..0 || GPR[rs]31..16 || GPR[rs]47..32 || GPR[rs]63..48
```

Exceptions:

Reserved Instruction

Programming Notes:

The DSBH and DSHD instructions can be used to convert doubleword data of one endianness to the other endianness. For example:

```
ld      t0, 0(a1)          /* Read doubleword value */
dsbh   t0, t0              /* Convert endianness of the halfwords */
dshd   t0, t0              /* Swap the halfwords within the doublewords */
```


31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	sa	00	DSRL 000000000

Format: DSLL rt, rs, sa**microMIPS64****Purpose:** Doubleword Shift Left Logical

To execute a left-shift of a doubleword by a fixed amount—0 to 31 bits

Description: GPR[rt] \leftarrow GPR[rs] \ll sa

The 64-bit doubleword contents of GPR rs are shifted left, inserting zeros into the emptied bits; the result is placed in GPR rt. The bit-shift amount in the range 0 to 31 is specified by sa.

Restrictions:**Operation:**

$$\begin{aligned} s &\leftarrow 0 \mid\mid sa \\ GPR[rt] &\leftarrow GPR[rs]_{(63-s)\dots0} \mid\mid 0^s \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	sa	00	DSLL32 000001000

6 5 5 5 2 9

Format: DSLL32 rt, rs, sa**microMIPS64****Purpose:** Doubleword Shift Left Logical Plus 32

To execute a left-shift of a doubleword by a fixed amount—32 to 63 bits

Description: $GPR[rt] \leftarrow GPR[rs] \ll (sa+32)$

The 64-bit doubleword contents of GPR rs are shifted left, inserting zeros into the emptied bits; the result is placed in GPR rt. The bit-shift amount in the range 0 to 31 is specified by sa.

Restrictions:**Operation:**

$$\begin{aligned} s &\leftarrow 1 \mid\mid sa \quad /* 32+sa */ \\ GPR[rt] &\leftarrow GPR[rs]_{(63-s)\dots 0} \mid\mid 0^s \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	00	DSLLV 000010000

Format: DSLLV rd, rt, rs**microMIPS64****Purpose:** Doubleword Shift Left Logical Variable

To execute a left-shift of a doubleword by a variable number of bits

Description: $GPR[rd] \leftarrow GPR[rt] \ll GPR[rs]$ The 64-bit doubleword contents of GPR *rt* are shifted left, inserting zeros into the emptied bits; the result is placed in GPR *rd*. The bit-shift amount in the range 0 to 63 is specified by the low-order 6 bits in GPR *rs*.**Restrictions:****Operation:**

$$\begin{aligned} s &\leftarrow GPR[rs]_{5..0} \\ GPR[rd] &\leftarrow GPR[rt]_{(63-s)..0} \mid\mid 0^s \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	sa	00	DSRA 010000000

Format: DSRA rt, rs, sa**microMIPS64****Purpose:** Doubleword Shift Right Arithmetic

To execute an arithmetic right-shift of a doubleword by a fixed amount—0 to 31 bits

Description: $GPR[rt] \leftarrow GPR[rs] \gg sa$ (arithmetic)The 64-bit doubleword contents of GPR *rs* are shifted right, duplicating the sign bit (63) into the emptied bits; the result is placed in GPR *rt*. The bit-shift amount in the range 0 to 31 is specified by *sa*.**Restrictions:****Operation:**

$$\begin{aligned} s &\leftarrow 0 \mid\mid sa \\ GPR[rt] &\leftarrow (GPR[rs]_{63})^s \mid\mid GPR[rs]_{63..s} \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	sa	0	DSRA32 010000100

6 5 5 5 2 9

Format: DSRA32 rt, rs, sa**microMIPS64****Purpose:** Doubleword Shift Right Arithmetic Plus 32

To execute an arithmetic right-shift of a doubleword by a fixed amount—32 to 63 bits

Description: $GPR[rt] \leftarrow GPR[rs] \gg (sa+32)$ (arithmetic)The doubleword contents of GPR *rs* are shifted right, duplicating the sign bit (63) into the emptied bits; the result is placed in GPR *rt*. The bit-shift amount in the range 32 to 63 is specified by *sa*+32.**Restrictions:****Operation:**

$$\begin{aligned} s &\leftarrow 1 \quad || \quad sa \quad /* 32+sa */ \\ GPR[rt] &\leftarrow (GPR[rs]_{63})^s \quad || \quad GPR[rs]_{63..s} \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	0	DSRAV 010010000

6 5 5 5 2 9

Format: DSRAV rd, rt, rs**microMIPS64****Purpose:** Doubleword Shift Right Arithmetic Variable

To execute an arithmetic right-shift of a doubleword by a variable number of bits

Description: GPR[rd] \leftarrow GPR[rt] \gg GPR[rs] (arithmetic)

The doubleword contents of GPR rt are shifted right, duplicating the sign bit (63) into the emptied bits; the result is placed in GPR rd. The bit-shift amount in the range 0 to 63 is specified by the low-order 6 bits in GPR rs.

Restrictions:**Operation:**

$$\begin{aligned} s &\leftarrow \text{GPR}[rs]_{5..0} \\ \text{GPR}[rd] &\leftarrow (\text{GPR}[rt]_{63})^s \mid\mid \text{GPR}[rt]_{63..s} \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rd	rt	sa	00	DSRL 001000000

Format: DSRL rt, rs, sa**microMIPS64****Purpose:** Doubleword Shift Right Logical

To execute a logical right-shift of a doubleword by a fixed amount—0 to 31 bits

Description: GPR[rt] \leftarrow GPR[rs] \gg sa (logical)

The doubleword contents of GPR rs are shifted right, inserting zeros into the emptied bits; the result is placed in GPR rt. The bit-shift amount in the range 0 to 31 is specified by sa.

Restrictions:**Operation:**

$$\begin{array}{ll} s & \leftarrow 0 \mid\mid sa \\ \text{GPR}[rt] & \leftarrow 0^s \mid\mid \text{GPR}[rs]_{63..s} \end{array}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	saminus32	00	DSRL32 001001000

6 5 5 5 2 9

Format: DSRL32 rt, rs, sa**microMIPS64****Purpose:** Doubleword Shift Right Logical Plus 32

To execute a logical right-shift of a doubleword by a fixed amount—32 to 63 bits

Description: GPR[rt] \leftarrow GPR[rs] \gg (saminus32+32) (logical)

The 64-bit doubleword contents of GPR rs are shifted right, inserting zeros into the emptied bits; the result is placed in GPR rt. The bit-shift amount in the range 32 to 63 is specified by saminus32+32.

Restrictions:**Operation:**

$$\begin{aligned} s &\leftarrow 1 \mid\mid sa \quad /* 32+saminus32 */ \\ \text{GPR}[rt] &\leftarrow 0^s \mid\mid \text{GPR}[rs]_{63..s} \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	00	DSRLV 001010000

6 5 5 5 2 9

Format: DSRLV rd, rt, rs**microMIPS64****Purpose:** Doubleword Shift Right Logical Variable

To execute a logical right-shift of a doubleword by a variable number of bits

Description: GPR[rd] \leftarrow GPR[rt] \gg GPR[rs] (logical)

The 64-bit doubleword contents of GPR rt are shifted right, inserting zeros into the emptied bits; the result is placed in GPR rd. The bit-shift amount in the range 0 to 63 is specified by the low-order 6 bits in GPR rs.

Restrictions:**Operation:**

$$\begin{aligned} s &\leftarrow \text{GPR}[rs]_{5..0} \\ \text{GPR}[rd] &\leftarrow 0^s \mid\mid \text{GPR}[rt]_{63..s} \end{aligned}$$

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	0	DSUB 110010000

Format: DSUB rd, rs, rt**microMIPS64****Purpose:** Doubleword Subtract

To subtract 64-bit integers; trap on overflow

Description: $GPR[rd] \leftarrow GPR[rs] - GPR[rt]$

The 64-bit doubleword value in GPR *rt* is subtracted from the 64-bit value in GPR *rs* to produce a 64-bit result. If the subtraction results in 64-bit 2's complement arithmetic overflow, then the destination register is not modified and an Integer Overflow exception occurs. If it does not overflow, the 64-bit result is placed into GPR *rd*.

Restrictions:**Operation:**

```

temp ← (GPR[rs]63 || GPR[rs]) - (GPR[rt]63 || GPR[rt])
if (temp64 ≠ temp63) then
    SignalException(IntegerOverflow)
else
    GPR[rd] ← temp63..0
endif

```

Exceptions:

Integer Overflow, Reserved Instruction

Programming Notes:

DSUBU performs the same arithmetic operation but does not trap on overflow.

31	26 25	21 20	16 15	11 10 9 8	0
POOL32S 010110	rt	rs	rd	0 00	DSUBU 111010000

Format: DSUBU rd, rs, rt**microMIPS64****Purpose:** Doubleword Subtract Unsigned

To subtract 64-bit integers

Description: $GPR[rd] \leftarrow GPR[rs] - GPR[rt]$ The 64-bit doubleword value in GPR *rt* is subtracted from the 64-bit value in GPR *rs* and the 64-bit arithmetic result is placed into GPR *rd*.

No Integer Overflow exception occurs under any circumstances.

Restrictions:**Operation: 64-bit processors** $GPR[rd] \leftarrow GPR[rs] - GPR[rt]$ **Exceptions:**

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

31	26 25	21 20	16 15	11 10	6 5	0
POOL32A 000000	0 00000	0 00000	3 00011	0 00000	SLL32 000000	6

6 5 5 5 5 6

Format: EHB

microMIPS

Purpose: Execution Hazard Barrier

To stop instruction execution until all execution hazards have been cleared.

Description:

EHB is the assembly idiom used to denote execution hazard barrier. The actual instruction is interpreted by the hardware as SLL r0, r0, 3.

This instruction alters the instruction issue behavior on a pipelined processor by stopping execution until all execution hazards have been cleared. Other than those that might be created as a consequence of setting Status_{CU0}, there are no execution hazards visible to an unprivileged program running in User Mode. All execution hazards created by previous instructions are cleared for instructions executed immediately following the EHB, even if the EHB is executed in the delay slot of a branch or jump. The EHB instruction does not clear instruction hazards—such hazards are cleared by the JALR.HB, JR.HB, and ERET instructions.

Restrictions:

None

Operation:

ClearExecutionHazards()

Exceptions:

None

Programming Notes:

In MIPS64 Release 2 implementations, this instruction resolves all execution hazards. On a superscalar processor, EHB alters the instruction issue behavior in a manner identical to SSNOP. For backward compatibility with Release 1 implementations, the last of a sequence of SSNOPs can be replaced by an EHB. In Release 1 implementations, the EHB will be treated as an SSNOP, thereby preserving the semantics of the sequence. In Release 2 implementations, replacing the final SSNOP with an EHB should have no performance effect because a properly sized sequence of SSNOPs will have already cleared the hazard. As EHB becomes the standard in MIPS implementations, the previous SSNOPs can be removed, leaving only the EHB.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	0 00000	rs	EI 0101011101	POOL32AXf 111100	6

Format: EI
EI rs

microMIPS
microMIPS

Purpose:

To return the previous value of the *Status* register and enable interrupts. If EI is specified without an argument, GPR r0 is implied, which discards the previous value of the Status register.

Description: $\text{GPR}[rt] \leftarrow \text{Status}; \text{Status}_{IE} \leftarrow 1$

The current value of the *Status* register is sign-extended and loaded into general register *rt*. The Interrupt Enable (IE) bit in the *Status* register is then set.

Restrictions:

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Operation:

```
data ← Status
GPR[rs] ← sign_extend(data)
StatusIE ← 1
```

Exceptions:

Coprocessor Unusable
Reserved Instruction (Release 1 implementations)

Programming Notes:

The effects of this instruction are identical to those accomplished by the sequence of reading *Status* into a GPR, setting the IE bit, and writing the result back to *Status*. Unlike the multiple instruction sequence, however, the EI instruction can not be aborted in the middle by an interrupt or exception.

This instruction creates an execution hazard between the change to the Status register and the point where the change to the interrupt enable takes effect. This hazard is cleared by the EHB, JALR.HB, JR.HB, or ERET instructions. Software must not assume that a fixed latency will clear the execution hazard.

31	26 25	16 15	6 5	0
POOL32A 000000	0 0000000000	ERET 1111001101	POOL32AXf 111100	6

Format: ERET**microMIPS****Purpose:** Exception Return

To return from interrupt, exception, or error trap.

Description:

ERET clears execution and instruction hazards, conditionally restores SRSCtl_{CSS} from SRSCtl_{ΠΣΣ} in a Release 2 implementation, and returns to the interrupted instruction at the completion of interrupt, exception, or error processing. ERET does not execute the next instruction (i.e., it has no delay slot).

Restrictions:

The operation of the processor is **UNDEFINED** if an ERET is executed in the delay slot of a branch or jump instruction.

An ERET placed between an LL and SC instruction will always cause the SC to fail.

ERET implements a software barrier that resolves all execution and instruction hazards created by Coprocessor 0 state changes (for Release 2 implementations, refer to the SYNCI instruction for additional information on resolving instruction hazards created by writing the instruction stream). The effects of this barrier are seen starting with the instruction fetch and decode of the instruction at the PC to which the ERET returns.

In a Release 2 implementation, ERET does not restore SRSCtl_{CSS} from SRSCtl_{PSS} if Status_{BEV} = 1, or if Status_{ERL} = 1 because any exception that sets Status_{ERL} to 1 (Reset, Soft Reset, NMI, or cache error) does not save SRSCtl_{CSS} in SRSCtl_{PSS}. If software sets Status_{ERL} to 1, it must be aware of the operation of an ERET that may be subsequently executed.

Operation:

```

if StatusERL = 1 then
    temp ← ErrorEPC
    StatusERL ← 0
else
    temp ← EPC
    StatusEXL ← 0
    if (ArchitectureRevision ≥ 2) and (SRSCtlHSS > 0) and (StatusBEV = 0) then
        SRSCtlCSS ← SRSCtlPSS
    endif
endif
if IsMIPS16Implemented() | (Config3ISA > 0) then
    PC ← temp63..1 || 0
    ISAMode ← temp0
else
    PC ← temp
endif
LLbit ← 0
ClearHazards()

```

Exceptions:

Coprocessor Unusable Exception

31	26 25	21 20	16 15	11 10	6 5	0
POOL32A 000000	rt	rs	msbd (size-1)	lsb (pos)	EXT 101100	6

Format: EXT rt, rs, pos, size

microMIPS

Purpose: Extract Bit Field

To extract a bit field from GPR rs and store it right-justified into GPR rt.

Description: $\text{GPR}[rt] \leftarrow \text{ExtractField}(\text{GPR}[rs], \text{msbd}, \text{lsb})$

The bit field starting at bit *pos* and extending for *size* bits is extracted from GPR *rs* and stored zero-extended and right-justified in GPR *rt*. The assembly language arguments *pos* and *size* are converted by the assembler to the instruction fields *msbd* (the most significant bit of the destination field in GPR *rt*), in instruction bits **15..11**, and *lsb* (least significant bit of the source field in GPR *rs*), in instruction bits **10..6**, as follows:


```
msbd ← size-1
lsb ← pos
```

The values of *pos* and *size* must satisfy all of the following relations:

```
0 ≤ pos < 32
0 < size ≤ 32
0 < pos+size ≤ 32
```

Figure 3-9 shows the symbolic operation of the instruction.

Figure 5.10 Operation of the EXT Instruction

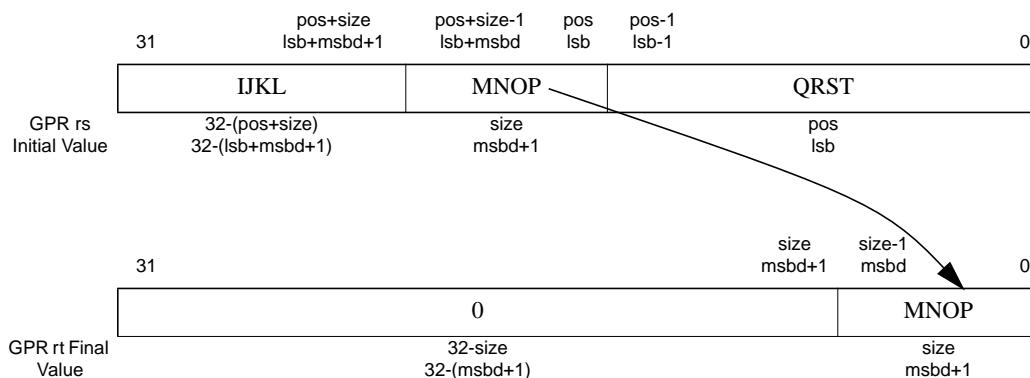

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The operation is **UNPREDICTABLE** if $lsb+msbd > 31$.

If GPR *rs* does not contain a sign-extended 32-bit value (bits **63..31** equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```
if ((lsb + msbd) > 31) or (NotWordValue(GPR[rs])) then
```

```
UNPREDICTABLE
endif
temp ← sign_extend(032-(msbd+1) || GPR[rs]msbd+lsb..lsb)
GPR[rt] ← temp
```

Exceptions:

Reserved Instruction

31	26 25	22 21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	FLOOR.L 00001100	POOL32FXf 111011

Format: FLOOR.L fmt

FLOOR.L.S ft, fs

FLOOR.L.D ft, fs

microMIPS

microMIPS

Purpose: Floating Point Floor Convert to Long Fixed Point

To convert an FP value to 64-bit fixed point, rounding down

Description: `FPR[ft] ← convert_and_round(FPR[fs])`The value in FPR *fs*, in format *fmt*, is converted to a value in 64-bit long fixed point format and rounded toward $-\infty$ (rounding mode 3). The result is placed in FPR *ft*.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{63} to $2^{63}-1$, the result cannot be represented correctly, an IEEE Invalid Operation condition exists, and the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation Enable bit is set in the *FCSR*, no result is written to *fd* and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{63}-1$, is written to *fd*.

Restrictions:

The fields *fs* and *ft* must specify valid FPRs—*fs* for type *fmt* and *ft* for long fixed point—if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
StoreFPR(ft, L, ConvertFmt(ValueFPR(fs, fmt), fmt, L))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact

31	26 25	22 21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	FLOOR.W 00101100	POOL32FXf 111011

6 5 5 1 1 8 6

Format: FLOOR.W(fmt)FLOOR.W.S ft, fs
FLOOR.W.D ft, fsmicroMIPS
microMIPS**Purpose:** Floating Point Floor Convert to Word Fixed Point

To convert an FP value to 32-bit fixed point, rounding down

Description: `FPR[ft] ← convert_and_round(FPR[fs])`The value in FPR *fs*, in format *fmt*, is converted to a value in 32-bit word fixed point format and rounded toward $-\infty$ (rounding mode 3). The result is placed in FPR *ft*.When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{31} to $2^{31}-1$, the result cannot be represented correctly, an IEEE Invalid Operation condition exists, and the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation *Enable* bit is set in the *FCSR*, no result is written to *fd* and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{31}-1$, is written to *ft*.**Restrictions:**The fields *fs* and *ft* must specify valid FPRs—*fs* for type *fmt* and *ft* for word fixed point—if they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.**Operation:**`StoreFPR(ft, W, ConvertFmt(ValueFPR(fs, fmt), fmt, W))`**Exceptions:**

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Unimplemented Operation, Inexact

31	26..25	21..20	16..15	11..10	6..5	0
POOL32A 000000	rt	rs	msbd (pos+size-1)	lsb (pos)	INS 001100	6

Format: INS rt, rs, pos, size

microMIPS

Purpose: Insert Bit Field

To merge a right-justified bit field from GPR *rs* into a specified field in GPR *rt*.

Description: GPR[rt] \leftarrow InsertField(GPR[rt], GPR[rs], msb, lsb)

The right-most *size* bits from GPR *rs* are merged into the value from GPR *rt* starting at bit position *pos*. The result is placed back in GPR *rt*. The assembly language arguments *pos* and *size* are converted by the assembler to the instruction fields *msb* (the most significant bit of the field), in instruction bits 15..11, and *lsb* (least significant bit of the field), in instruction bits 10..6, as follows:


```
msb ← pos+size-1
lsb ← pos
```

The values of *pos* and *size* must satisfy all of the following relations:

```
0 ≤ pos < 32
0 < size ≤ 32
0 < pos+size ≤ 32
```

Figure 3-10 shows the symbolic operation of the instruction.

Figure 5.11 Operation of the INS Instruction

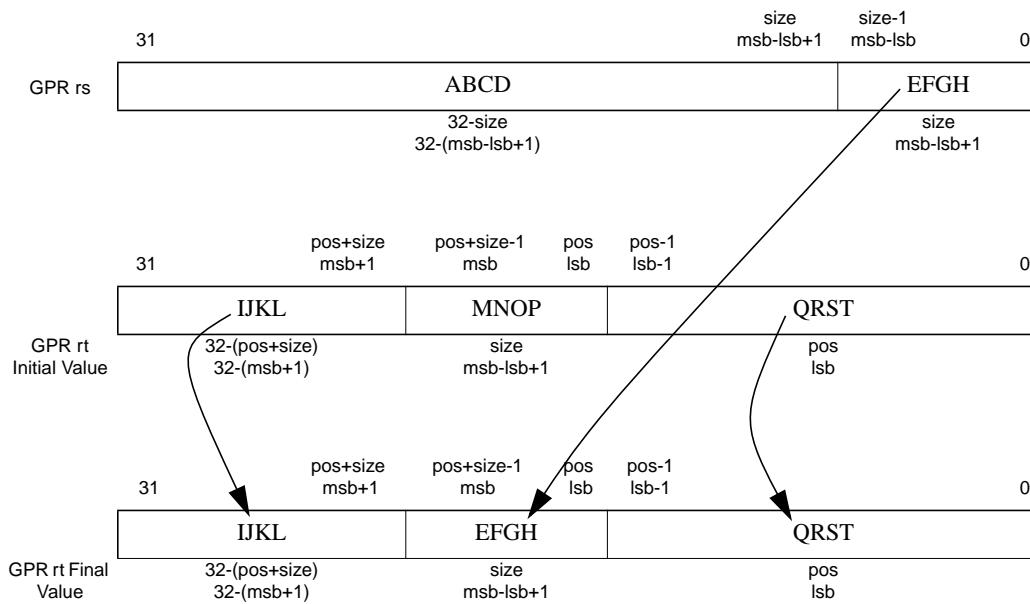

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The operation is **UNPREDICTABLE** if $lsb > msb$.

If either GPR rs or GPR rt does not contain sign-extended 32-bit values (bits **63..31** equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```
if (lsb > msb) or (NotWordValue(GPR[rs])) or (NotWordValue(GPR[rt])) then
    UNPREDICTABLE
endif
GPR[rt] ← sign_extend(GPR[rt]31..msb+1 || GPR[rs]msb-1sb..0 || GPR[rt]1sb-1..0)
```

Exceptions:

Reserved Instruction

31	26	25	0
J32 110101		instr_index	

Format: J target

microMIPS

Purpose: Jump

To branch within the current 128 MB-aligned region

Description:

This is a PC-region branch (not PC-relative); the effective target address is in the “current” 128 MB-aligned region. The low 27 bits of the target address is the *instr_index* field shifted left 1 bits. The remaining upper bits are the corresponding bits of the address of the instruction in the delay slot (not the branch itself).

Jump to the effective target address. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:


Exceptions:

None

Programming Notes:

Forming the branch target address by concatenating PC and index bits rather than adding a signed offset to the PC is an advantage if all program code addresses fit into a 128 MB region aligned on a 128 MB boundary. It allows a branch from anywhere in the region to anywhere in the region, an action not allowed by a signed relative offset.

This definition creates the following boundary case: When the jump instruction is in the last word of a 128 MB region, it can branch only to the following 128 MB region containing the branch delay slot.

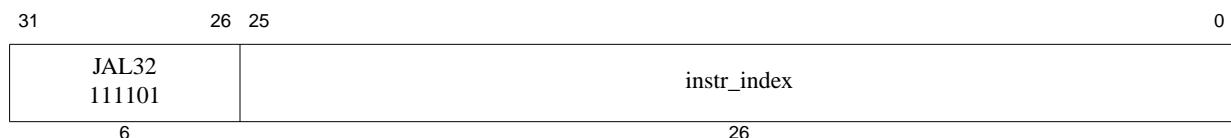**Format:** JAL target**microMIPS****Purpose:** Jump and Link

To execute a procedure call within the current 128 MB-aligned region

Description:

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, at which location execution continues after a procedure call.

This is a PC-region branch (not PC-relative); the effective target address is in the “current” 128 MB-aligned region. The low 27 bits of the target address is the *instr_index* field shifted left 1 bits. The remaining upper bits are the corresponding bits of the address of the instruction in the delay slot (not the branch itself).

Jump to the effective target address. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself.

Restrictions:

The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of JAL.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```
I:      GPR[31] ← PC + 8
I+1:   PC ← PCGPRLEN-1..27 || instr_index || 01
```

Exceptions:

None

Programming Notes:

Forming the branch target address by catenating PC and index bits rather than adding a signed offset to the PC is an advantage if all program code addresses fit into a 128 MB region aligned on a 128 MB boundary. It allows a branch from anywhere in the region to anywhere in the region, an action not allowed by a signed relative offset.

This definition creates the following boundary case: When the branch instruction is in the last word of a 128 MB region, it can branch only to the following 128 MB region containing the branch delay slot.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	JALR 0000111100	POOL32AXf 111100	6

Format: JALR rs (rt = 31 implied)
JALR rt, rs

microMIPS
microMIPS

Purpose:

Jump and Link Register

To execute a procedure call to an instruction address in a register

Description: GPR[rt] \leftarrow return_addr, PC \leftarrow GPR[rs]

Place the return address link in GPR rt. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

For processors that do not implement the MIPS32/64ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

For processors that do implement the MIPS32/64ISA:

- Jump to the effective target address in GPR rs. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Set the *ISA Mode* bit to the value in GPR rs bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

Restrictions:

The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of JALR.

Register specifiers rs and rt must not be equal, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by re-executing the branch when an exception occurs in the branch delay slot.

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR rs.

For processors which implement MIPS32/64 and if the ISAMode bit of the target is MIPS32/64 (bit 0 of GPR rs is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS32/64 ISA, if the intended target ISAMode is MIPS32/64 (bit 0 of GPR rs is zero), an Address Error exception occurs when the jump target is fetched as an instruction.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I: temp  $\leftarrow$  GPR[rs]
      GPR[rt]  $\leftarrow$  PC + 8
I+1: if Config1CA = 0 then
          PC  $\leftarrow$  temp
        else

```

```
PC ← tempGPRLEN-1..1 || 0
ISAMode ← temp0
endif
```

Exceptions:

None

Programming Notes:

This branch-and-link instruction that can select a register for the return link; other link instructions use GPR 31. The default register for GPR *rd*, if omitted in the assembly language instruction, is GPR 31.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rd	rs	JALR.HB 0001111100	POOL32AXf 111100	6

Format: JALR.HB rs (rt = 31 implied)
JALR.HB rt, rs

microMIPS
microMIPS

Purpose: Jump and Link Register with Hazard Barrier

To execute a procedure call to an instruction address in a register and clear all execution and instruction hazards

Description: GPR[rt] \leftarrow return_addr, PC \leftarrow GPR[rs], clear execution and instruction hazards

Place the return address link in GPR *rt*. The return link is the address of the second instruction following the branch, where execution continues after a procedure call.

For processors that do not implement the MIPS32/64 ISA:

- Jump to the effective target address in GPR *rs*. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

For processors that do implement the MIPS32/64 ISA:

- Jump to the effective target address in GPR *rs*. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself. Set the *ISA Mode* bit to the value in GPR *rs* bit 0. Bit 0 of the target get address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

JALR.HB implements a software barrier that resolves all execution and instruction hazards created by Coprocessor 0 state changes (for Release 2 implementations, refer to the SYNCI instruction for additional information on resolving instruction hazards created by writing the instruction stream). The effects of this barrier are seen starting with the instruction fetch and decode of the instruction at the PC to which the JALR.HB instruction jumps. An equivalent barrier is also implemented by the ERET instruction, but that instruction is only available if access to Coprocessor 0 is enabled, whereas JALR.HB is legal in all operating modes.

This instruction clears both execution and instruction hazards. Refer to the [EHB](#) instruction description for the method of clearing execution hazards alone.

Restrictions:

The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of JAL.HB.

Register specifiers *rs* and *rd* must not be equal, because such an instruction does not have the same effect when reexecuted. The result of executing such an instruction is **UNPREDICTABLE**. This restriction permits an exception handler to resume execution by re-executing the branch when an exception occurs in the branch delay slot.

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR *rs*.

For processors which implement MIPS32/64 and if the ISAMode bit of the target address is MIPS32/64 (bit 0 of GPR *rs* is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS32/64 ISA, if the intended target ISAMode is MIPS32/64 (bit 0 of GPR *rs* is zero), an Address Error exception occurs when the jump target is fetched as an instruction.

After modifying an instruction stream mapping or writing to the instruction stream, execution of those instructions has **UNPREDICTABLE** behavior until the instruction hazard has been cleared with JALR.HB, JALRS.HB, JR.HB, ERET, or DERET. Further, the operation is **UNPREDICTABLE** if the mapping of the current instruction stream is modified.

JALR.HB does not clear hazards created by any instruction that is executed in the delay slot of the JALR.HB. Only hazards created by instructions executed before the JALR.HB are cleared by the JALR.HB.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I: temp ← GPR[rs]
      GPR[rt] ← PC + 8
I+1:if Config1CA = 0 then
      PC ← temp
    else
      PC ← tempGPRLEN-1..1 || 0
      ISAMode ← temp0
    endif
    ClearHazards()
  
```

Exceptions:

None

Programming Notes:

This branch-and-link instruction can select a register for the return link; other link instructions use GPR 31. The default register for GPR *rt*, if omitted in the assembly language instruction, is GPR 31.

This instruction implements the final step in clearing execution and instruction hazards before execution continues. A hazard is created when a Coprocessor 0 or TLB write affects execution or the mapping of the instruction stream, or after a write to the instruction stream. When such a situation exists, software must explicitly indicate to hardware that the hazard should be cleared. Execution hazards alone can be cleared with the EHB instruction. Instruction hazards can only be cleared with a JR.HB, JALR.HB, or ERET instruction. These instructions cause hardware to clear the hazard before the instruction at the target of the jump is fetched. Note that because these instructions are encoded as jumps, the process of clearing an instruction hazard can often be included as part of a call (JALR) or return (JR) sequence, by simply replacing the original instructions with the HB equivalent.

Example: Clearing hazards due to an ASID change

```

/*
 * Code used to modify ASID and call a routine with the new
 * mapping established.
 *
 * a0 = New ASID to establish
 * a1 = Address of the routine to call
 */
mfc0  v0, C0_EntryHi      /* Read current ASID */
li    v1, ~M_EntryHiASID  /* Get negative mask for field */
and   v0, v0, v1            /* Clear out current ASID value */
or    v0, v0, a0             /* OR in new ASID value */
mtc0  v0, C0_EntryHi      /* Rewrite EntryHi with new ASID */
jalr.hb a1                 /* Call routine, clearing the hazard */
  
```

nop

31	26 25	21 20	16 15 14 13	6 5	0
POOL32A 000000	00000	rs	00	JALR 00111100	POOL32AXf 111100

Format: JR rs

microMIPS

Purpose: Jump Register

To execute a branch to an instruction address in a register

Description: $PC \leftarrow GPR[rs]$ Jump to the effective target address in GPR rs . Execute the instruction following the jump, in the branch delay slot, before jumping.For processors that implement the MIPS32/64 ISA, set the *ISA Mode* bit to the value in GPR rs bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one**Restrictions:**The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of JALR.If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR rs .For processors which implement MIPS32/64 and the ISAMode bit of the target address is MIPS32/64 (bit 0 of GPR rs is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.For processors that do not implement MIPS32/64 ISA, if the intended target ISAMode is MIPS32/64(bit 0 of GPR rs is zero), an Address Error exception occurs when the jump target is fetched as an instruction.Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.**Operation:**

```

I: temp  $\leftarrow GPR[rs]$ 
I+1: if Config1CA = 0 then
        PC  $\leftarrow$  temp
    else
        PC  $\leftarrow$  tempGPRLEN-1..1 || 0
        ISAMode  $\leftarrow$  temp0
    endif

```

Exceptions:

None

Programming Notes:Software should use the value 31 for the rs field of the instruction word on return from a JAL, JALR, or BGEZAL, and should use a value other than 31 for remaining uses of JR.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	0 00000	rs	JALR.HB 01111100	POOL32AXf 111100	6

Format: JR.HB rs**microMIPS****Purpose:** Jump Register with Hazard Barrier

To execute a branch to an instruction address in a register and clear all execution and instruction hazards.

Description: $PC \leftarrow GPR[rs]$, clear execution and instruction hazards

Jump to the effective target address in GPR *rs*. Execute the instruction following the jump, in the branch delay slot, before jumping.

JR.HB implements a software barrier that resolves all execution and instruction hazards created by Coprocessor 0 state changes (for Release 2 implementations, refer to the SYNCI instruction for additional information on resolving instruction hazards created by writing the instruction stream). The effects of this barrier are seen starting with the instruction fetch and decode of the instruction at the PC to which the JR.HB instruction jumps. An equivalent barrier is also implemented by the ERET instruction, but that instruction is only available if access to Coprocessor 0 is enabled, whereas JR.HB is legal in all operating modes.

This instruction clears both execution and instruction hazards. Refer to the [EHB](#) instruction description for the method of clearing execution hazards alone.

For processors that implement the MIPS32/64 ISA, set the *ISA Mode* bit to the value in GPR *rs* bit 0. Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

Restrictions:

The delay-slot instruction must be 32-bits in size. Processor operation is **UNPREDICTABLE** if a 16-bit instruction is placed in the delay slot of JALR.

If only one instruction set is implemented, then the effective target address must obey the alignment rules of the instruction set. If multiple instruction sets are implemented, the effective target address must obey the alignment rules of the intended instruction set of the target address as specified by the bit 0 or GPR *rs*.

For processors which implement MIPS32/64 and the ISAMode bit of the target address is MIPS32/64 (bit 0 of GPR *rs* is 0) and address bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

For processors that do not implement MIPS32/64 ISA, if the intended target ISAMode is MIPS32/64 (bit 0 of GPR *rs* is zero), an Address Error exception occurs when the jump target is fetched as an instruction.

After modifying an instruction stream mapping or writing to the instruction stream, execution of those instructions has **UNPREDICTABLE** behavior until the hazard has been cleared with JALR.HB, JALRS.HB, JR.HB, ERET, or DERET. Further, the operation is **UNPREDICTABLE** if the mapping of the current instruction stream is modified.

JR.HB does not clear hazards created by any instruction that is executed in the delay slot of the JR.HB. Only hazards created by instructions executed before the JR.HB are cleared by the JR.HB.

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

```

I: temp ← GPR[rs]
I+1:if Config1CA = 0 then
        PC ← temp
    
```

```

else
    PC ← tempGPRLEN-1..1 || 0
    ISAMode ← temp0
endif
ClearHazards()

```

Exceptions:

None

Programming Notes:

This instruction implements the final step in clearing execution and instruction hazards before execution continues. A hazard is created when a Coprocessor 0 or TLB write affects execution or the mapping of the instruction stream, or after a write to the instruction stream. When such a situation exists, software must explicitly indicate to hardware that the hazard should be cleared. Execution hazards alone can be cleared with the EHB instruction. Instruction hazards can only be cleared with a JR.HB, JALR.HB, or ERET instruction. These instructions cause hardware to clear the hazard before the instruction at the target of the jump is fetched. Note that because these instructions are encoded as jumps, the process of clearing an instruction hazard can often be included as part of a call (JALR) or return (JR) sequence, by simply replacing the original instructions with the HB equivalent.

Example: Clearing hazards due to an ASID change

```

/*
 * Routine called to modify ASID and return with the new
 * mapping established.
 *
 * a0 = New ASID to establish
 */
    mfc0    v0, C0_EntryHi      /* Read current ASID */
    li      v1, ~M_EntryHiASID /* Get negative mask for field */
    and    v0, v0, v1          /* Clear out current ASID value */
    or     v0, v0, a0          /* OR in new ASID value */
    mtc0    v0, C0_EntryHi      /* Rewrite EntryHi with new ASID */
    jr.hb   ra                /* Return, clearing the hazard */
    nop

```

Example: Making a write to the instruction stream visible

```

/*
 * Routine called after new instructions are written to
 * make them visible and return with the hazards cleared.
 */
    {Synchronize the caches - see the SYNCI and CACHE instructions}
    sync           /* Force memory synchronization */
    jr.hb   ra      /* Return, clearing the hazard */
    nop


```

Example: Clearing instruction hazards in-line

```

la      AT, 10f
jr.hb   AT           /* Jump to next instruction, clearing */
nop                  /* hazards */
10:

```

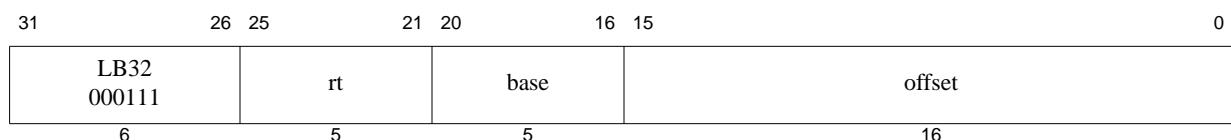Format: LB rt, offset(base)

microMIPS

Purpose: Load Byte

To load a byte from memory as a signed value

Description: $\text{GPR}[rt] \leftarrow \text{memory}[\text{GPR}[base] + \text{offset}]$

The contents of the 8-bit byte at the memory location specified by the effective address are fetched, sign-extended, and placed in GPR *rt*. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

None

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory (CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor BigEndianCPU3
GPR[rt] ← sign_extend(memdoubleword7+8*byte..8*byte)
  
```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LBE 100	offset	

6 5 5 4 3 9

Format: LBE rt, offset(base)

microMIPS

Purpose: Load Byte EVA

To load a byte as a signed value from user mode virtual address space when executing in kernel mode.

Description: $GPR[rt] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 8-bit byte at the memory location specified by the effective address are fetched, sign-extended, and placed in GPR *rt*. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The LBE instruction functions in exactly the same fashion as the LB instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode and executing in kernel mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the Config5_{EVA} field being set to one.

Restrictions:

Only usable when access to Coprocessor0 is enabled and accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory (CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor BigEndianCPU3
GPR[rt] ← sign_extend(memdoubleword7+8*byte..8*byte)
```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	0
LBU32 000101	rt	base	offset	

6 5 5 16

Format: LBU rt, offset(base)**microMIPS****Purpose:** Load Byte Unsigned

To load a byte from memory as an unsigned value

Description: $\text{GPR}[rt] \leftarrow \text{memory}[\text{GPR}[base] + \text{offset}]$ The contents of the 8-bit byte at the memory location specified by the effective address are fetched, zero-extended, and placed in GPR *rt*. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.**Restrictions:**

None

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory (CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor BigEndianCPU3
GPR[rt] ← zero_extend(memdoubleword7+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LBUE 000	offset	

6 5 5 4 3 9

Format: LBUE rt, offset(base)

microMIPS

Purpose: Load Byte Unsigned EVA

To load a byte as an unsigned value from user mode virtual address space when executing in kernel mode.

Description: $GPR[rt] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 8-bit byte at the memory location specified by the effective address are fetched, zero-extended, and placed in GPR *rt*. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The LBUE instruction functions in exactly the same fashion as the LBU instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the $\text{Config5}_{\text{EVA}}$ field being set to one.

Restrictions:

Only usable when access to Coprocessor0 is enabled and accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory (CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor BigEndianCPU3
GPR[rt] ← zero_extend(memdoubleword7+8*byte..8*byte)
```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	0
LD32 110111	rt	base	offset	

6 5 5 16

Format: LD rt, offset(base)**microMIPS64****Purpose:** Load Doubleword

To load a doubleword from memory

Description: GPR[rt] \leftarrow memory[GPR[base] + offset]The contents of the 64-bit doubleword at the memory location specified by the aligned effective address are fetched and placed in GPR *rt*. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.**Restrictions:**

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr2..0  $\neq$  03 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
memdoubleword  $\leftarrow$  LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)
GPR[rt]  $\leftarrow$  memdoubleword

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction, Watch

31	26 25	21 20	16 15	0
LDC132 101111	ft	base	offset	

6 5 5 16

Format: LDC1 ft, offset(base)

microMIPS

Purpose: Load Doubleword to Floating Point

To load a doubleword from memory to an FPR

Description: $FPR[ft] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 64-bit doubleword at the memory location specified by the aligned effective address are fetched and placed in FPR *ft*. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

An Address Error exception occurs if EffectiveAddress_{2..0} ≠ 0 (not doubleword-aligned).

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
memdoubleword ← LoadMemory(CCA, DOUBLEWORD, pAddr, vAddr, DATA)
StoreFPR(ft, UNINTERPRETED_DOUBLEWORD, memdoubleword)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	rt	base	LDC2 0010	offset	

6 5 5 4 12

Format: LDC2 rt, offset(base)

microMIPS

Purpose: Load Doubleword to Coprocessor 2

To load a doubleword from memory to a Coprocessor 2 register

Description: $CPR[2, rt, 0] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 64-bit doubleword at the memory location specified by the aligned effective address are fetched and placed in Coprocessor 2 register *rt*. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

An Address Error exception occurs if $\text{EffectiveAddress}_{2..0} \neq 0$ (not doubleword-aligned).

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
if vAddr2..0 ≠ 03 then SignalException(AddressError) endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
memdoubleword ← LoadMemory(CCA, DOUBLEWORD, pAddr, vAddr, DATA)
CPR[2, rt, 0] ← memdoubleword
```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	LDL 0100	offset	

6 5 5 4 12

Format: LDL rt, offset(base)

microMIPS64

Purpose: Load Doubleword Left

To load the most-significant part of a doubleword from an unaligned memory address

Description: GPR[rt] \leftarrow GPR[rt] MERGE memory[GPR[base] + offset]

The 16-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the most-significant of 8 consecutive bytes forming a doubleword (*DW*) in memory, starting at an arbitrary byte boundary.

A part of *DW*, the most-significant 1 to 8 bytes, is in the aligned doubleword containing *EffAddr*. This part of *DW* is loaded appropriately into the most-significant (left) part of GPR *rt*, leaving the remainder of GPR *rt* unchanged.

Figure 5.12 Unaligned Doubleword Load Using LDL and LDR

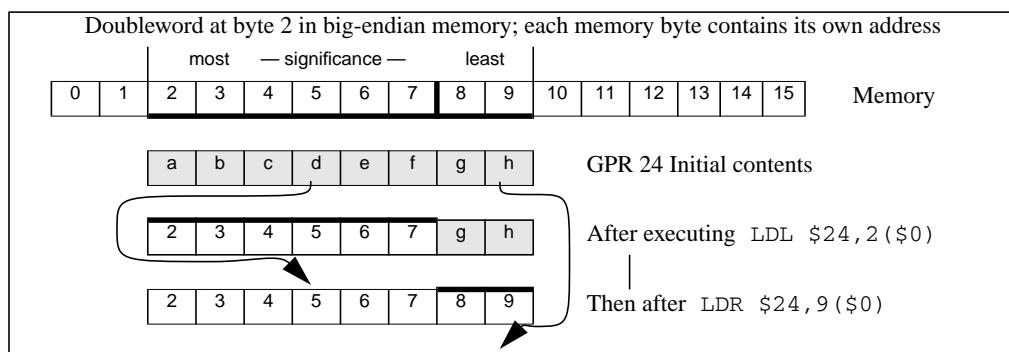
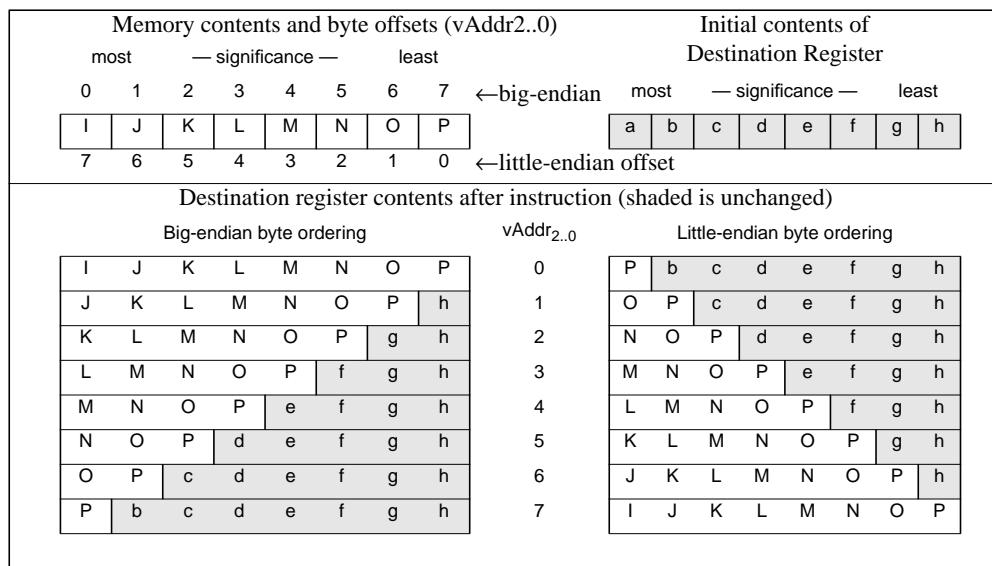


Figure 3-11 illustrates this operation for big-endian byte ordering. The 8 consecutive bytes in 2..9 form an unaligned doubleword starting at location 2. A part of *DW*, 6 bytes, is located in the aligned doubleword starting with the most-significant byte at 2. LDL first loads these 6 bytes into the left part of the destination register and leaves the remainder of the destination unchanged. The complementary LDR next loads the remainder of the unaligned doubleword.

The bytes loaded from memory to the destination register depend on both the offset of the effective address within an aligned doubleword—the low 3 bits of the address (*vAddr2..0*)—and the current byte-ordering mode of the processor (big- or little-endian). Figure 3-12 shows the bytes loaded for every combination of offset and byte ordering.

Figure 5.13 Bytes Loaded by LDL Instruction

**Restrictions:****Operation:**

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
if BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..3 || 03
endif
byte ← vAddr2..0 xor BigEndianCPU3
memdoubleword ← LoadMemory (CCA, byte, pAddr, vAddr, DATA)
GPR[rt] ← memdblword7+8*byte..0 || GPR[rt]55-8*byte..0

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction, Watch

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	LDR 0101	offset	

6 5 5 4 12

Format: LDR rt, offset(base)

microMIPS

Purpose: Load Doubleword Right

To load the least-significant part of a doubleword from an unaligned memory address


Description: $GPR[rt] \leftarrow GPR[rt] \text{ MERGE memory}[GPR[\text{base}] + \text{offset}]$

The 16-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the least-significant of 8 consecutive bytes forming a doubleword (*DW*) in memory, starting at an arbitrary byte boundary.

A part of *DW*, the least-significant 1 to 8 bytes, is in the aligned doubleword containing *EffAddr*. This part of *DW* is loaded appropriately into the least-significant (right) part of GPR *rt* leaving the remainder of GPR *rt* unchanged.


Figure 3-13 illustrates this operation for big-endian byte ordering. The 8 consecutive bytes in 2..9 form an unaligned doubleword starting at location 2. Two bytes of the *DW* are located in the aligned doubleword containing the least-significant byte at 9. LDR first loads these 2 bytes into the right part of the destination register, and leaves the remainder of the destination unchanged. The complementary LDL next loads the remainder of the unaligned doubleword.

Figure 5.14 Unaligned Doubleword Load Using LDR and LDL

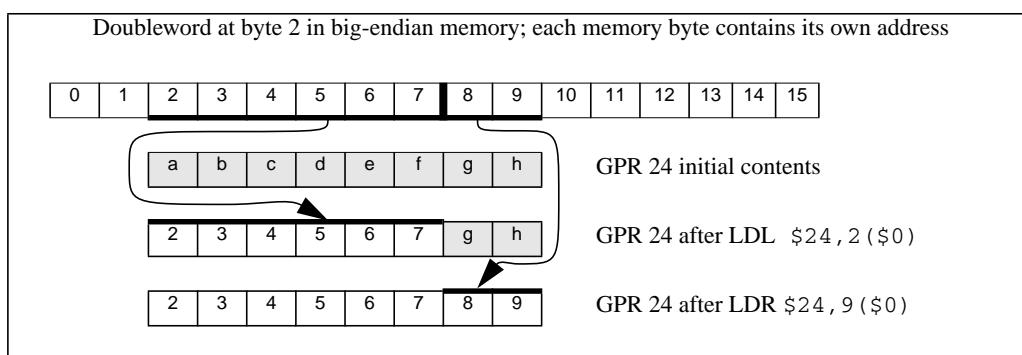

The bytes loaded from memory to the destination register depend on both the offset of the effective address within an aligned doubleword—the low 3 bits of the address (*vAddr2..0*)—and the current byte-ordering mode of the processor (big- or little-endian).

Figure 3-14 shows the bytes loaded for every combination of offset and byte ordering.

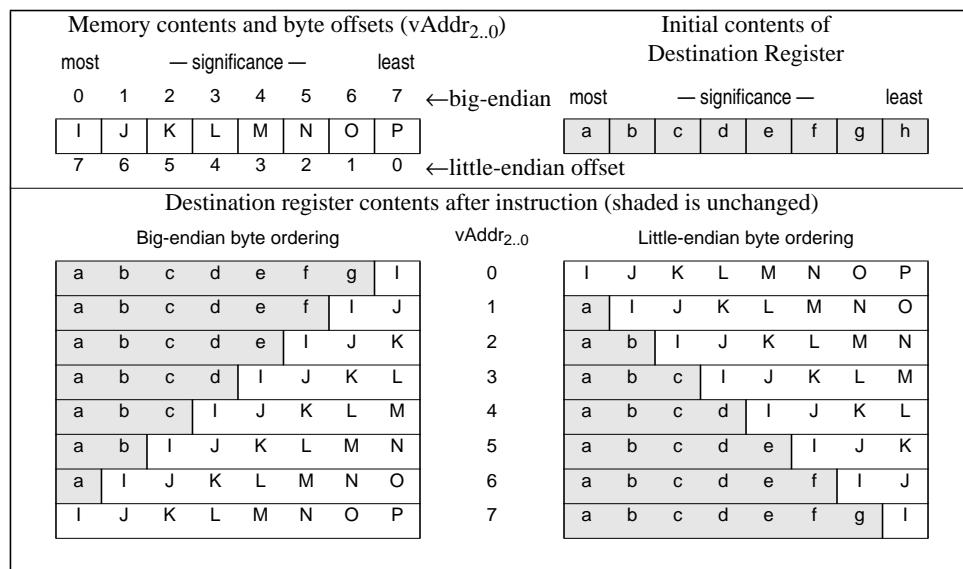Figure 5.15 Bytes Loaded by LDR Instruction**Restrictions:****Operation: 64-bit processors**

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
if BigEndianMem = 1 then
    pAddr ← pAddrPSIZE-1..3 || 03
endif
byte ← vAddr2..0 xor BigEndianCPU3
memdoubleword ← LoadMemory (CCA, byte, pAddr, vAddr, DATA)
GPR[rt] ← GPR[rt]63..64-8*byte || memdoubleword63..8*byte

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction, Watch

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	index	base	fd	00	LDXC1 011001000

6 5 5 5 2 9

Format: LDXC1 fd, index(base)

microMIPS
microMIPS

Purpose: Load Doubleword Indexed to Floating Point

To load a doubleword from memory to an FPR (GPR+GPR addressing)

Description: FPR[fd] \leftarrow memory[GPR[base] + GPR[index]]

The contents of the 64-bit doubleword at the memory location specified by the aligned effective address are fetched and placed in FPR *fd*. The contents of GPR *index* and GPR *base* are added to form the effective address.

Restrictions:

An Address Error exception occurs if EffectiveAddress_{2..0} \neq 0 (not doubleword-aligned).

Operation:

```

vAddr  $\leftarrow$  GPR[base] + GPR[index]
if vAddr2..0  $\neq$  03 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
memdoubleword  $\leftarrow$  LoadMemory(CCA, DOUBLEWORD, pAddr, vAddr, DATA)
StoreFPR(fd, UNINTERPRETED_DOUBLEWORD, memdoubleword)

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Reserved Instruction, Coprocessor Unusable, Watch

31	26 25	21 20	16 15	0
LH32 001111	rt	base	offset	

6 5 5 16

Format: LH rt, offset(base)**microMIPS****Purpose:** Load Halfword

To load a halfword from memory as a signed value

Description: GPR[rt] \leftarrow memory[GPR[base] + offset]

The contents of the 16-bit halfword at the memory location specified by the aligned effective address are fetched, sign-extended, and placed in GPR *rt*. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr0  $\neq$  0 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation(vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword  $\leftarrow$  LoadMemory(CCA, HALFWORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[rt]  $\leftarrow$  sign_extend(memdoubleword15+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LHE 101	offset	

6 5 5 4 3 9

Format: LHE rt, offset(base)**microMIPS****Purpose:** Load Halfword EVA

To load a halfword as a signed value from user mode virtual address space when executing in kernel mode.

Description: GPR[rt] \leftarrow memory[GPR[base] + offset]

The contents of the 16-bit halfword at the memory location specified by the aligned effective address are fetched, sign-extended, and placed in GPR *rt*. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The LHE instruction functions in exactly the same fashion as the LH instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the *Config5_EVA* field being set to one.

Restrictions:

Only usable when access to Coprocessor0 is enabled and accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword  $\leftarrow$  LoadMemory (CCA, HALFWORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[rt]  $\leftarrow$  sign_extend(memdoubleword15+8*byte..8*byte)
```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	0
LHU32 001101	rt	base	offset	

6 5 5 16

Format: LHU rt, offset(base)**microMIPS****Purpose:** Load Halfword Unsigned

To load a halfword from memory as an unsigned value

Description: $GPR[rt] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 16-bit halfword at the memory location specified by the aligned effective address are fetched, zero-extended, and placed in GPR *rt*. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword ← LoadMemory (CCA, HALFWORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[rt] ← zero_extend(memdoubleword15+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LHUE 001	offset	

Format: LHUE rt, offset(base)

microMIPS

Purpose: Load Halfword Unsigned EVA

To load a halfword as an unsigned value from user mode virtual address space when executing in kernel mode.

Description: $GPR[rt] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 16-bit halfword at the memory location specified by the aligned effective address are fetched, zero-extended, and placed in GPR *rt*. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The LHUE instruction functions in exactly the same fashion as the LHU instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the Config5_{EVA} field being set to one.

Restrictions:

Only usable when access to Coprocessor0 is enabled and accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword ← LoadMemory (CCA, HALFWORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[rt] ← zero_extend(memdoubleword15+8*byte..8*byte)
```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	LL32 0011	offset	

6 5 5 5 12

Format: LL rt, offset(base)

microMIPS

Purpose: Load Linked Word

To load a word from memory for an atomic read-modify-write

Description: GPR[rt] \leftarrow memory[GPR[base] + offset]

The LL and SC instructions provide the primitives to implement atomic read-modify-write (RMW) operations for synchronizable memory locations.

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length, and written into GPR *rt*. The 12-bit signed *offset* is added to the contents of GPR *base* to form an effective address.

This begins a RMW sequence on the current processor. There can be only one active RMW sequence per processor. When an LL is executed it starts an active RMW sequence replacing any other sequence that was active. The RMW sequence is completed by a subsequent SC instruction that either completes the RMW sequence atomically and succeeds, or does not and fails.

Executing LL on one processor does not cause an action that, by itself, causes an SC for the same block to fail on another processor.

An execution of LL does not have to be followed by execution of SC; a program is free to abandon the RMW sequence without attempting a write.

Restrictions:

The addressed location must be synchronizable by all processors and I/O devices sharing the location; if it is not, the result is **UNPREDICTABLE**. Which storage is synchronizable is a function of both CPU and system implementations. See the documentation of the [SC](#) instruction for the formal definition.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the effective address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr1..0  $\neq$  02 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword  $\leftarrow$  LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt]  $\leftarrow$  sign_extend(memdoubleword31+8*byte..8*byte)
LLbit  $\leftarrow$  1

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Watch

Programming Notes:

There is no Load Linked Word Unsigned operation corresponding to Load Word Unsigned.

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	LLD 0111	offset	

6 5 5 4 12

Format: LLD rt, offset(base)**microMIPS64****Purpose:** Load Linked Doubleword

To load a doubleword from memory for an atomic read-modify-write

Description: GPR[rt] \leftarrow memory[GPR[base] + offset]

The LLD and SCD instructions provide primitives to implement atomic read-modify-write (RMW) operations for synchronizable memory locations.

The contents of the 64-bit doubleword at the memory location specified by the aligned effective address are fetched and placed into GPR *rt*. The 16-bit signed *offset* is added to the contents of GPR *base* to form an effective address.

This begins a RMW sequence on the current processor. There can be only one active RMW sequence per processor. When an LLD is executed it starts the active RMW sequence and replaces any other sequence that was active. The RMW sequence is completed by a subsequent SCD instruction that either completes the RMW sequence atomically and succeeds, or does not complete and fails.

Executing LLD on one processor does not cause an action that, by itself, would cause an SCD for the same block to fail on another processor.

An execution of LLD does not have to be followed by execution of SCD; a program is free to abandon the RMW sequence without attempting a write.

Restrictions:The addressed location must be synchronizable by all processors and I/O devices sharing the location; if it is not, the result is **UNPREDICTABLE**. Which storage is synchronizable is a function of both CPU and system implementations. See the documentation of the **SCD** instruction for the formal definition.

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the effective address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr2..0  $\neq$  03 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
memdoubleword  $\leftarrow$  LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)
GPR[rt]  $\leftarrow$  memdoubleword
LLbit  $\leftarrow$  1

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Reserved Instruction, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LLE 110	offset	

6 5 5 4 3 9

Format: LLE rt, offset(base)**microMIPS****Purpose:** Load Linked Word EVA

To load a word from a user mode virtual address when executing in kernel mode for an atomic read-modify-write

Description: $GPR[rt] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The LLE and SCE instructions provide the primitives to implement atomic read-modify-write (RMW) operations for synchronizable memory locations using user mode virtual addresses while executing in kernel mode.

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length, and written into GPR *rt*. The 12-bit signed *offset* is added to the contents of GPR *base* to form an effective address.

This begins a RMW sequence on the current processor. There can be only one active RMW sequence per processor. When an LLE is executed it starts an active RMW sequence replacing any other sequence that was active. The RMW sequence is completed by a subsequent SCE instruction that either completes the RMW sequence atomically and succeeds, or does not and fails.

Executing LLE on one processor does not cause an action that, by itself, causes an SCE for the same block to fail on another processor.

An execution of LLE does not have to be followed by execution of SCE; a program is free to abandon the RMW sequence without attempting a write.

The LLE instruction functions in exactly the same fashion as the LL instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Segmentation Control for additional information.

Implementation of this instruction is specified by the *Config5_EVA* field being set to one.**Restrictions:**The addressed location must be synchronizable by all processors and I/O devices sharing the location; if it is not, the result is **UNPREDICTABLE**. Which storage is synchronizable is a function of both CPU and system implementations. See the documentation of the **SCE** instruction for the formal definition.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the effective address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory(CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

LLbit \leftarrow 1

Exceptions:

TLB Refill, TLB Invalid, Address Error, Reserved Instruction, Watch, Coprocessor Unusable

Programming Notes:

There is no Load Linked Word Unsigned operation corresponding to Load Word Unsigned.

31	26 25	21 20	16 15	0
POOL32I 010000	LUI 01101	rs	immediate	

6 5 5 16

Format: LUI rs, immediate**microMIPS****Purpose:** Load Upper Immediate

To load a constant into the upper half of a word

Description: $\text{GPR}[rs] \leftarrow \text{immediate} \mid\mid 0^{16}$ The 16-bit *immediate* is shifted left 16 bits and concatenated with 16 bits of low-order zeros. The 32-bit result is sign-extended and placed into GPR *rt*.**Restrictions:**

None

Operation: $\text{GPR}[rs] \leftarrow \text{sign_extend}(\text{immediate} \mid\mid 0^{16})$ **Exceptions:**

None

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	index	base	fd	00	LUXC1 101001000

6 5 5 5 2 9

Format: LUXC1 fd, index(base)microMIPS
microMIPS**Purpose:** Load Doubleword Indexed Unaligned to Floating Point

To load a doubleword from memory to an FPR (GPR+GPR addressing), ignoring alignment

Description: $FPR[fd] \leftarrow \text{memory}[(GPR[\text{base}] + GPR[\text{index}])_{\text{PSIZE}-1..3}]$

The contents of the 64-bit doubleword at the memory location specified by the effective address are fetched and placed into the low word of FPR *fd*. The contents of GPR *index* and GPR *base* are added to form the effective address. The effective address is doubleword-aligned; EffectiveAddress_{2..0} are ignored.

Restrictions:The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**

```

vAddr  $\leftarrow (GPR[\text{base}]+GPR[\text{index}])_{63..3} || 0^3$ 
(pAddr, CCA)  $\leftarrow \text{AddressTranslation}(vAddr, \text{DATA}, \text{LOAD})$ 
memdoubleword  $\leftarrow \text{LoadMemory}(CCA, \text{DOUBLEWORD}, pAddr, vAddr, \text{DATA})$ 
StoreFPR(ft, UNINTERPRETED_DOUBLEWORD, memdoubleword)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, Watch

31	26 25	21 20	16 15	0
LW32 111111	rt	base	offset	

6 5 5 16

Format: LW rt, offset(base)**microMIPS****Purpose:** Load Word

To load a word from memory as a signed value

Description: GPR[rt] \leftarrow memory[GPR[base] + offset]

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in GPR *rt*. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr1..0  $\neq$  02 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword  $\leftarrow$  LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt]  $\leftarrow$  sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

31	26 25	21 20	16 15	0
LWC132 100111	ft	base	offset	

6 5 5 16

Format: LWC1 ft, offset(base)

microMIPS

Purpose: Load Word to Floating Point

To load a word from memory to an FPR

Description: $FPR[ft] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched and placed into the low word of FPR *ft*. If FPRs are 64 bits wide, bits 63..32 of FPR *ft* become **UNPREDICTABLE**. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

An Address Error exception occurs if EffectiveAddress_{1..0} ≠ 0 (not word-aligned).

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory(CCA, WORD, pAddr, vAddr, DATA)
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
StoreFPR(ft, UNINTERPRETED_WORD,
          memdoubleword31+8*bytesel..8*bytesel)
```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Reserved Instruction, Coprocessor Unusable, Watch

31	26 25	21 20	16 15	12 11	0
POOL32B 001000	rt	base	LWC2 0000	offset	

6 5 5 4 12

Format: LWC2 rt, offset(base)

microMIPS

Purpose: Load Word to Coprocessor 2

To load a word from memory to a COP2 register

Description: $CPR[2, rt, 0] \leftarrow \text{memory}[GPR[\text{base}] + \text{offset}]$

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched and placed into the low word of *COP2* (Coprocessor 2) general register *rt*. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

An Address Error exception occurs if EffectiveAddress_{1..0} ≠ 0 (not word-aligned).

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr12..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory(CCA, DOUBLEWORD, pAddr, vAddr, DATA)
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
CPR[2, rt, 0] ← sign_extend(memdoubleword31+8*bytesel..8*bytesel)

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Reserved Instruction, Coprocessor Unusable, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LWE 111	offset	

6 5 5 4 3 9

Format: LWE rt, offset(base)

microMIPS

Purpose: Load Word EVA

To load a word from user mode virtual address space when executing in kernel mode.

Description: $\text{GPR}[rt] \leftarrow \text{memory}[\text{GPR}[base] + \text{offset}]$

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, sign-extended to the GPR register length if necessary, and placed in GPR *rt*. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The LWE instruction functions in exactly the same fashion as the LW instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the Config5_{EVA} field being set to one.

Restrictions:

Only usable when access to Coprocessor0 is enabled and when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt] ← sign_extend(memdoubleword31+8*byte..8*byte)
```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	LWL32 0000	offset	

6 5 5 5 12

Format: LWL rt, offset(base)

microMIPS

Purpose: Load Word Left

To load the most-significant part of a word as a signed value from an unaligned memory address

Description: $GPR[rt] \leftarrow GPR[rt] \text{ MERGE } \text{memory}[GPR[\text{base}] + \text{offset}]$


The 12-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the most-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.

The most-significant 1 to 4 bytes of *W* is in the aligned word containing the *EffAddr*. This part of *W* is loaded into the most-significant (left) part of the word in GPR *rt*. The remaining least-significant part of the word in GPR *rt* is unchanged.


For 64-bit GPR *rt* registers, the destination word is the low-order word of the register. The loaded value is treated as a signed value; the word sign bit (bit 31) is always loaded from memory and the new sign bit value is copied into bits 63..32.

The figure below illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is in the aligned word containing the most-significant byte at 2. First, LWL loads these 2 bytes into the left part of the destination register word and leaves the right part of the destination word unchanged. Next, the complementary LWR loads the remainder of the unaligned word

Figure 5.16 Unaligned Word Load Using LWL and LWR

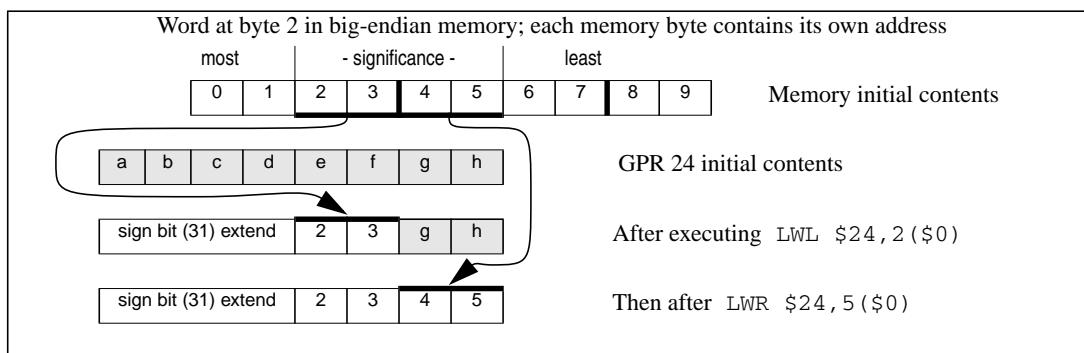

The bytes loaded from memory to the destination register depend on both the offset of the effective address within an aligned word, that is, the low 2 bits of the address ($v\text{Addr}_{1..0}$), and the current byte-ordering mode of the processor (big- or little-endian). The figure below shows the bytes loaded for every combination of offset and byte ordering.

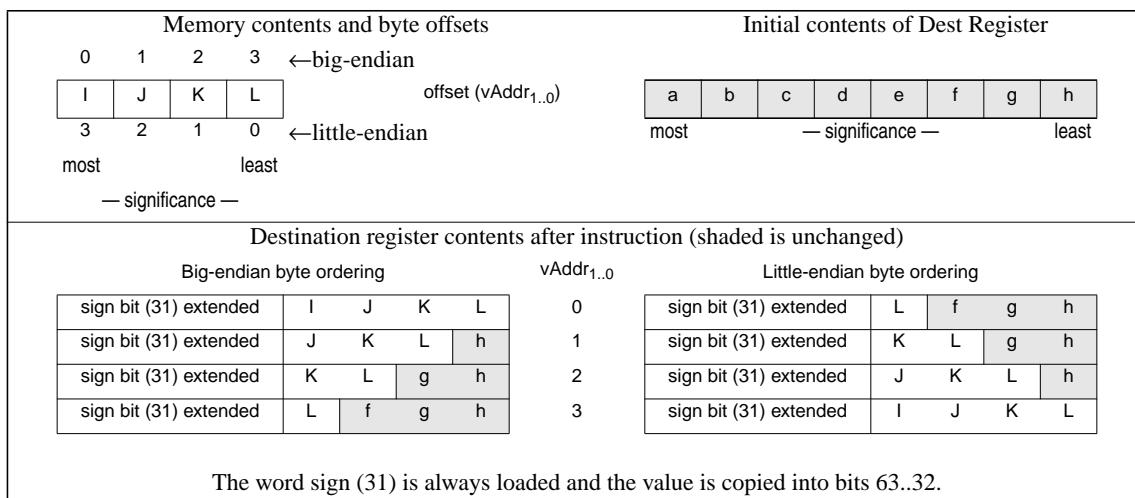Figure 5.17 Bytes Loaded by LWL Instruction**Restrictions:**

None

Operation:

```

 $vAddr \leftarrow sign\_extend(offset) + GPR[base]$ 
 $(pAddr, CCA) \leftarrow AddressTranslation(vAddr, DATA, LOAD)$ 
 $pAddr \leftarrow pAddr_{PSIZE-1..3} || (pAddr_{2..0} \text{ xor ReverseEndian}^3)$ 
if BigEndianMem = 0 then
     $pAddr \leftarrow pAddr_{PSIZE-1..3} || 0^3$ 
endif
byte  $\leftarrow 0 || (vAddr_{1..0} \text{ xor BigEndianCPU}^2)$ 
word  $\leftarrow vAddr_2 \text{ xor BigEndianCPU}$ 
memdoubleword  $\leftarrow LoadMemory(CCA, byte, pAddr, vAddr, DATA)$ 
temp  $\leftarrow memdoubleword_{31+32*word-8*byte..32*word} || GPR[rt]_{23-8*byte..0}$ 
GPR[rt]  $\leftarrow (temp_{31})^{32} || temp$ 

```

Exceptions:

None

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

Programming Notes:

The architecture provides no direct support for treating unaligned words as unsigned values, that is, zeroing bits 63..32 of the destination register when bit 31 is loaded.

Historical Information:

In the MIPS I architecture, the LWL and LWR instructions were exceptions to the load-delay scheduling restriction. A LWL or LWR instruction which was immediately followed by another LWL or LWR instruction, and used the same destination register would correctly merge the 1 to 4 loaded bytes with the data loaded by the previous instruction. All such restrictions were removed from the architecture in MIPS II.

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LWLE 010	offset	

6 5 5 4 3 9

Format: LWLE rt, offset(base)

microMIPS

Purpose: Load Word Left EVA

To load the most-significant part of a word as a signed value from an unaligned user mode virtual address while executing in kernel mode.

Description: $GPR[rt] \leftarrow GPR[rt] \text{ MERGE memory}[GPR[\text{base}] + \text{offset}]$


The 9-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the most-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.

The most-significant 1 to 4 bytes of *W* is in the aligned word containing the *EffAddr*. This part of *W* is loaded into the most-significant (left) part of the word in GPR *rt*. The remaining least-significant part of the word in GPR *rt* is unchanged.

For 64-bit GPR *rt* registers, the destination word is the low-order word of the register. The loaded value is treated as a signed value; the word sign bit (bit 31) is always loaded from memory and the new sign bit value is copied into bits 63..32.

The figure below illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is in the aligned word containing the most-significant byte at 2. First, LWLE loads these 2 bytes into the left part of the destination register word and leaves the right part of the destination word unchanged. Next, the complementary LWRE loads the remainder of the unaligned word


Figure 5.18 Unaligned Word Load Using LWLE and LWRE

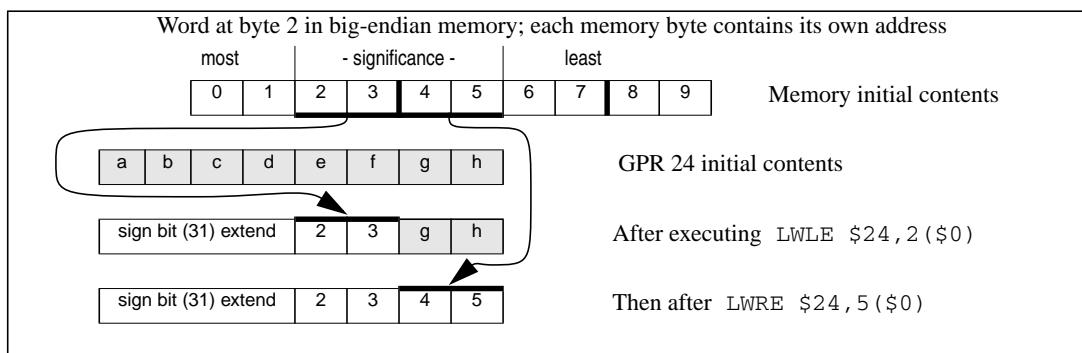

The bytes loaded from memory to the destination register depend on both the offset of the effective address within an aligned word, that is, the low 2 bits of the address ($v\text{Addr}_{1..0}$), and the current byte-ordering mode of the processor (big- or little-endian). The figure below shows the bytes loaded for every combination of offset and byte ordering.

The LWLE instruction functions in exactly the same fashion as the LWL instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the Config5_{EVA} field being set to one.

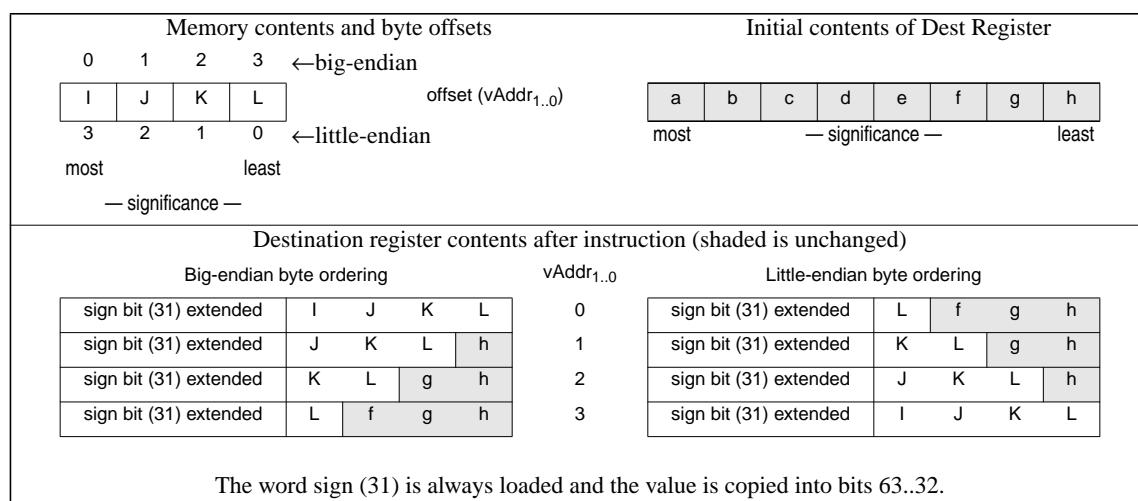Figure 5.19 Bytes Loaded by LWLE Instruction**Restrictions:**

Only usable when access to Coprocessor0 is enabled and when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
if BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..3 || 03
endif
byte ← 0 || (vAddr1..0 xor BigEndianCPU2)
word ← vAddr2 xor BigEndianCPU
memdoubleword ← LoadMemory (CCA, byte, pAddr, vAddr, DATA)
temp ← memdoubleword31+32*word-8*byte..32*word || GPR[rt]23-8*byte..0
GPR[rt] ← (temp31)32 || temp

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch, Reserved Instruction, Coprocessor Unusable

Programming Notes:

The architecture provides no direct support for treating unaligned words as unsigned values, that is, zeroing bits 63..32 of the destination register when bit 31 is loaded.

Historical Information:

In the MIPS I architecture, the LWL and LWR instructions were exceptions to the load-delay scheduling restriction. A LWL or LWR instruction which was immediately followed by another LWL or LWR instruction, and used the same destination register would correctly merge the 1 to 4 loaded bytes with the data loaded by the previous instruction. All such restrictions were removed from the architecture in MIPS II.

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	LWR32 0001	offset	

6 5 5 5 12

Format: LWR rt, offset(base)

microMIPS

Purpose: Load Word Right

To load the least-significant part of a word from an unaligned memory address as a signed value

Description: GPR[rt] \leftarrow GPR[rt] MERGE memory[GPR[base] + offset]

The 12-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the least-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.


A part of *W*, the least-significant 1 to 4 bytes, is in the aligned word containing *EffAddr*. This part of *W* is loaded into the least-significant (right) part of the word in GPR *rt*. The remaining most-significant part of the word in GPR *rt* is unchanged.

If GPR *rt* is a 64-bit register, the destination word is the low-order word of the register. The loaded value is treated as a signed value; if the word sign bit (bit 31) is loaded (that is, when all 4 bytes are loaded), then the new sign bit value is copied into bits 63..32. If bit 31 is not loaded, the value of bits 63..32 is implementation dependent; the value is either unchanged or a copy of the current value of bit 31.


Executing both LWR and LWL, in either order, delivers a sign-extended word value in the destination register.

The figure below illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is in the aligned word containing the least-significant byte at 5. First, LWR loads these 2 bytes into the right part of the destination register. Next, the complementary LWL loads the remainder of the unaligned word.

Figure 5.20 Unaligned Word Load Using LWL and LWR

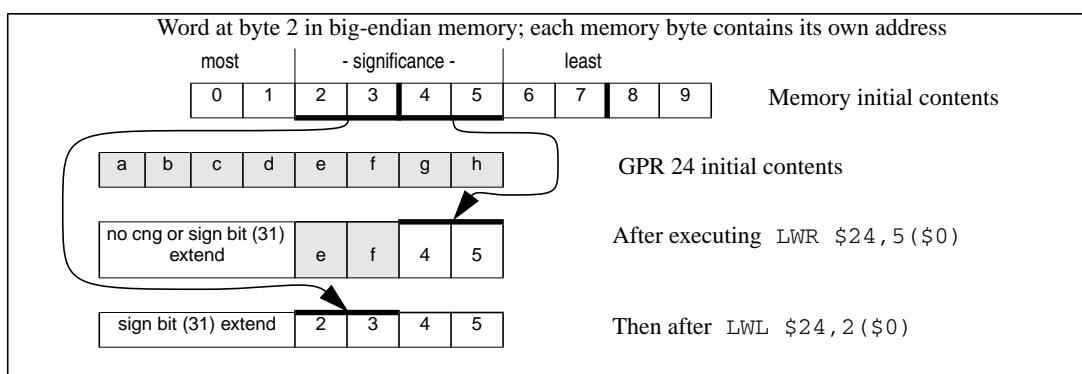

The bytes loaded from memory to the destination register depend on both the offset of the effective address within an aligned word, that is, the low 2 bits of the address ($vAddr_{1..0}$), and the current byte-ordering mode of the processor (big- or little-endian). The figure below shows the bytes loaded for every combination of offset and byte ordering.

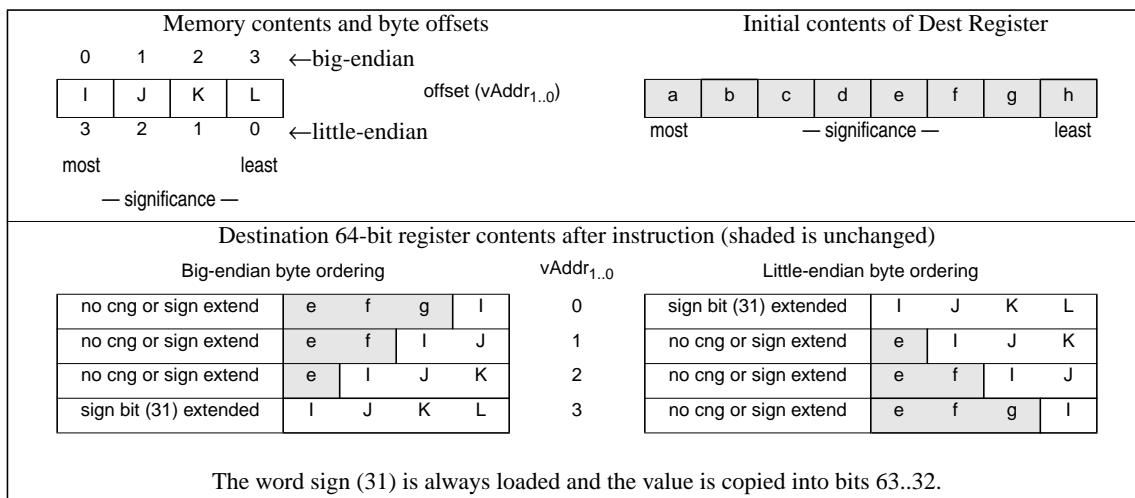Figure 5.21 Bytes Loaded by LWR Instruction**Restrictions:**

None

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
if BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..3 || 03
endif
byte ← vAddr1..0 xor BigEndianCPU2
word ← vAddr2 xor BigEndianCPU
memdoubleword ← LoadMemory (CCA, byte, pAddr, vAddr, DATA)
temp ← GPR[rt]31..32-8*byte || memdoubleword31+32*word..32*word+8*byte
if byte = 4 then
    utemp ← (temp31)32      /* loaded bit 31, must sign extend */
else
    /* one of the following two behaviors: */
    utemp ← GPR[rt]63..32    /* leave what was there alone */
    utemp ← (GPR[rt]31)32  /* sign-extend bit 31 */
endif
GPR[rt] ← utemp || temp

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch

Programming Notes:

The architecture provides no direct support for treating unaligned words as unsigned values, that is, zeroing bits 63..32 of the destination register when bit 31 is loaded.

Historical Information:

In the MIPS I architecture, the LWL and LWR instructions were exceptions to the load-delay scheduling restriction. A LWL or LWR instruction which was immediately followed by another LWL or LWR instruction, and used the same destination register would correctly merge the 1 to 4 loaded bytes with the data loaded by the previous instruc-

tion. All such restrictions were removed from the architecture in MIPS II.

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	LD-EVA 0110	LWRE 011	offset	

6 5 5 4 3 9

Format: LWRE rt, offset(base)

microMIPS

Purpose: Load Word Right EVA

To load the least-significant part of a word from an unaligned user mode virtual memory address as a signed value while executing in kernel mode.

Description: $GPR[rt] \leftarrow GPR[rt] \text{ MERGE memory}[GPR[\text{base}] + \text{offset}]$

The 9-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the least-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.

A part of *W*, the least-significant 1 to 4 bytes, is in the aligned word containing *EffAddr*. This part of *W* is loaded into the least-significant (right) part of the word in GPR *rt*. The remaining most-significant part of the word in GPR *rt* is unchanged.

If GPR *rt* is a 64-bit register, the destination word is the low-order word of the register. The loaded value is treated as a signed value; if the word sign bit (bit 31) is loaded (that is, when all 4 bytes are loaded), then the new sign bit value is copied into bits 63..32. If bit 31 is not loaded, the value of bits 63..32 is implementation dependent; the value is either unchanged or a copy of the current value of bit 31.


Executing both LWRE and LWLE, in either order, delivers a sign-extended word value in the destination register.

The figure below illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is in the aligned word containing the least-significant byte at 5. First, LWRE loads these 2 bytes into the right part of the destination register. Next, the complementary LWLE loads the remainder of the unaligned word.

The LWRE instruction functions in exactly the same fashion as the LWR instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the *Config5_EVA* field being set to one.

Figure 5.22 Unaligned Word Load Using LWLE and LWRE

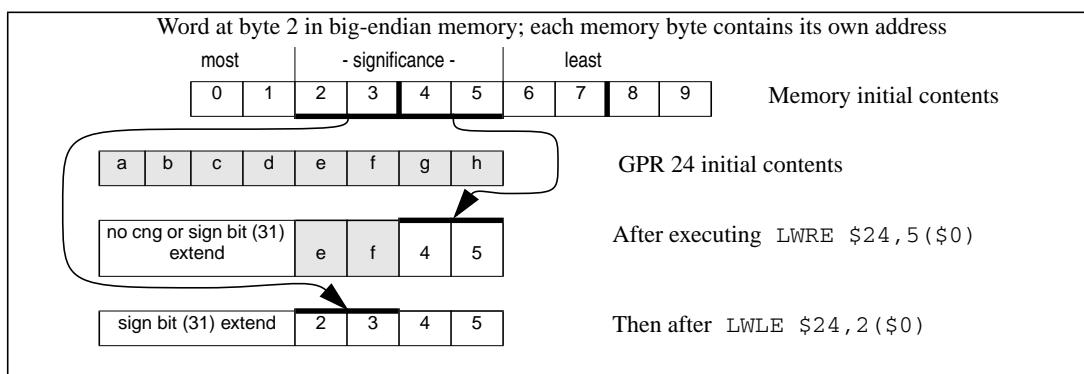

The bytes loaded from memory to the destination register depend on both the offset of the effective address within an aligned word, that is, the low 2 bits of the address ($vAddr_{1..0}$), and the current byte-ordering mode of the processor (big- or little-endian). The figure below shows the bytes loaded for every combination of offset and byte ordering.

Figure 5.23 Bytes Loaded by LWRE Instruction

Memory contents and byte offsets				Initial contents of Dest Register									
0	1	2	3	\leftarrow big-endian									
I	J	K	L	offset ($vAddr_{1..0}$)									
3	2	1	0	\leftarrow little-endian									
most	least		\leftarrow significance —								least		
Destination 64-bit register contents after instruction (shaded is unchanged)													
Big-endian byte ordering				$vAddr_{1..0}$				Little-endian byte ordering					
no cng or sign extend	e	f	g	■	I	sign bit (31) extended				I	J		
no cng or sign extend	e	f	I	J	no cng or sign extend				I	J	K		
no cng or sign extend	e	I	J	K	no cng or sign extend				e	f	I		
sign bit (31) extended	I	J	K	L	no cng or sign extend				e	f	g		

The word sign (31) is always loaded and the value is copied into bits 63..32.

Restrictions:

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
if BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..3 || 03
endif
byte ← vAddr1..0 xor BigEndianCPU2
word ← vAddr2..1 xor BigEndianCPU
memdoubleword ← LoadMemory (CCA, byte, pAddr, vAddr, DATA)
temp ← GPR[rt]31..32-8*byte || memdoubleword31+32*word..32*word+8*byte
if byte = 4 then
    utemp ← (temp31)32      /* loaded bit 31, must sign extend */
else
    /* one of the following two behaviors: */
    utemp ← GPR[rt]63..32      /* leave what was there alone */
    utemp ← (GPR[rt]31)32    /* sign-extend bit 31 */
endif
GPR[rt] ← utemp || temp

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Watch, Reserved Instruction, Coprocessor Unusable

Programming Notes:

The architecture provides no direct support for treating unaligned words as unsigned values, that is, zeroing bits 63..32 of the destination register when bit 31 is loaded.

Historical Information:

In the MIPS I architecture, the LWL and LWR instructions were exceptions to the load-delay scheduling restriction. A LWL or LWR instruction which was immediately followed by another LWL or LWR instruction, and used the same destination register would correctly merge the 1 to 4 loaded bytes with the data loaded by the previous instruction. All such restrictions were removed from the architecture in MIPS II.

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	LWU 1110	offset	

6 5 5 4 12

Format: LWU rt, offset(base)**microMIPS64****Purpose:** Load Word Unsigned

To load a word from memory as an unsigned value

Description: GPR[rt] \leftarrow memory[GPR[base] + offset]

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched, zero-extended, and placed in GPR *rt*. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr1..0  $\neq$  02 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, LOAD)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword  $\leftarrow$  LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
GPR[rt]  $\leftarrow$  032 || memdoubleword31+8*byte..8*byte

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction, Watch

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	index	base	fd	00	LWXC1 001001000

6 5 5 5 2 9

Format: LWXC1 fd, index(base)

microMIPS
microMIPS

Purpose: Load Word Indexed to Floating Point

To load a word from memory to an FPR (GPR+GPR addressing)

Description: $FPR[fd] \leftarrow \text{memory}[\text{GPR}[base] + \text{GPR}[index]]$

The contents of the 32-bit word at the memory location specified by the aligned effective address are fetched and placed into the low word of FPR fd . If FPRs are 64 bits wide, bits 63..32 of FPR fs become **UNPREDICTABLE**. The contents of GPR $index$ and GPR $base$ are added to form the effective address.

Restrictions:

An Address Error exception occurs if EffectiveAddress_{1..0} ≠ 0 (not word-aligned).

Operation:

```

vAddr ← GPR[base] + GPR[index]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory(CCA, WORD, pAddr, vAddr, DATA)
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
StoreFPR(fd, UNINTERPRETED_WORD,
          memdoubleword31+8*bytesel..8*bytesel)

```

Exceptions:

TLB Refill, TLB Invalid, Address Error, Reserved Instruction, Coprocessor Unusable, Watch

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	MADD 1100101100	POOL32AXf 111100	6

Format: MADD rs, rt**microMIPS****Purpose:** Multiply and Add Word to Hi,Lo

To multiply two words and add the result to Hi, Lo

Description: $(HI, LO) \leftarrow (HI, LO) + (GPR[rs] \times GPR[rt])$

The 32-bit word value in GPR *rs* is multiplied by the 32-bit word value in GPR *rt*, treating both operands as signed values, to produce a 64-bit result. The product is added to the 64-bit concatenated values of $HI_{31..0}$ and $LO_{31..0}$. The most significant 32 bits of the result are sign-extended and written into *HI* and the least significant 32 bits are sign-extended and written into *LO*. No arithmetic exception occurs under any circumstances.

Restrictions:

If GPRs *rs* or *rt* do not contain sign-extended 32-bit values (bits **63..31** equal), then the results of the operation are **UNPREDICTABLE**.

This instruction does not provide the capability of writing directly to a target GPR.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← ( $HI_{31..0} || LO_{31..0}$ ) + (GPR[rs]31..0 × GPR[rt]31..0)
HI ← sign_extend(temp63..32)
LO ← sign_extend(temp31..0)

```

Exceptions:

None

Programming Notes:

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

	31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	fr	MADD.S 000001		
6	5	5	5	5	5	6	0
	31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	fr	MADD.D 001001		
6	5	5	5	5	5	6	0
	31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	fr	MADD.PS 010001		
6	5	5	5	5	5	6	0

Format: MADD.fmt

MADD.S fd, fr, fs, ft

microMIPS

MADD.D fd, fr, fs, ft

microMIPS

MADD.PS fd, fr, fs, ft

microMIPS

Purpose: Floating Point Multiply Add

To perform a combined multiply-then-add of FP values

Description: FPR[fd] \leftarrow (FPR[fs] \times FPR[ft]) + FPR[fr]

The value in FPR *fs* is multiplied by the value in FPR *ft* to produce an intermediate product. If *FIR_{Has2008}*=0 or *FCSR_{MAC2008}*=0 then the intermediate product is rounded according to the current rounding mode in *FCSR*. If *FCSR_{MAC2008}*=1 then the intermediate product is calculated to infinite precision. The value in FPR *fr* is added to the product. The result sum is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, and placed into FPR *fd*. The operands and result are values in format *fmt*.

If *FIR_{Has2008}*=0 or *FCSR_{MAC2008}*=0 then the results and flags are as if separate floating-point multiply and add instructions were executed. If *FCSR_{MAC2008}*=1, the multiply operation can only signal invalid operation among the IEEE exceptions.

MADD.PS multiplies then adds the upper and lower halves of FPR *fr*, FPR *fs*, and FPR *ft* independently, and ORs together any generated exceptional conditions.

Cause bits are ORed into the *Flag* bits if no exception is taken.

Restrictions:

The fields *fr*, *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of MADD.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```

vfr  $\leftarrow$  ValueFPR(fr, fmt)
vfs  $\leftarrow$  ValueFPR(fs, fmt)
vft  $\leftarrow$  ValueFPR(ft, fmt)
StoreFPR(fd, fmt, (vfs  $\times_{\text{fmt}}$  vft) +fmt vfr)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Unimplemented Operation, Invalid Operation, Overflow, Underflow

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	MADDU 1101101100	POOL32AXf 111100	6

Format: MADDU rs, rt

microMIPS

Purpose: Multiply and Add Unsigned Word to Hi,LoTo multiply two unsigned words and add the result to *HI*, *LO*.**Description:** $(HI, LO) \leftarrow (HI, LO) + (GPR[rs] \times GPR[rt])$

The 32-bit word value in GPR *rs* is multiplied by the 32-bit word value in GPR *rt*, treating both operands as unsigned values, to produce a 64-bit result. The product is added to the 64-bit concatenated values of $HI_{31..0}$ and $LO_{31..0}$. The most significant 32 bits of the result are sign-extended and written into *HI* and the least significant 32 bits are sign-extended and written into *LO*. No arithmetic exception occurs under any circumstances.

Restrictions:

If GPRs *rs* or *rt* do not contain sign-extended 32-bit values (bits 63..31 equal), then the results of the operation are **UNPREDICTABLE**.

This instruction does not provide the capability of writing directly to a target GPR.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp <- ( $HI_{31..0} \parallel LO_{31..0}$ ) + (( $0^{32} \parallel GPR[rs]_{31..0}$ )  $\times$  ( $0^{32} \parallel GPR[rt]_{31..0}$ ))
HI <- sign_extend(temp $_{63..32}$ )
LO <- sign_extend(temp $_{31..0}$ )

```

Exceptions:

None

Programming Notes:

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

31	26 25	21 20	16 15 14 13	11 10	6 5	0
POOL32A 000000	rt	rs	00	sel	MFC0 00011	POOL32AXf 111100

6 5 5 3 5 6 0

Format: MFC0 rt, rs
MFC0 rt, rs, sel

microMIPS
microMIPS

Purpose: Move from Coprocessor 0

To move the contents of a coprocessor 0 register to a general register.

Description: $GPR[rt] \leftarrow CPR[0, rs, sel]$

The contents of the coprocessor 0 register specified by the combination of *rs* and *sel* are sign-extended and loaded into general register *rt*. Note that not all coprocessor 0 registers support the *sel* field. In those instances, the *sel* field must be zero.

When the coprocessor 0 register specified is the *EntryLo0* or the *EntryLo1* register, the RI/XI fields are moved to bits 31:30 of the destination register. This feature supports MIPS32 backward compatibility on a MIPS64 system.

Restrictions:

The results are **UNDEFINED** if coprocessor 0 does not contain a register as specified by *rs* and *sel*.

Operation:

```

reg = rs
data <- CPR[0, reg, sel]31..0
if (reg,sel = EntryLo1 or reg,sel = EntryLo0) then
    GPR[rt]29..0 <- data29..0
    GPR[rt]31 <- data63
    GPR[rt]30 <- data62
    GPR[rt]63..32 <- sign_extend(data63)
else
    GPR[rt] <- sign_extend(data)
endif

```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	MFC1 10000000	POOL32FXf 111011

Format: MFC1 rt, fs**microMIPS****Purpose:** Move Word From Floating Point

To copy a word from an FPU (CP1) general register to a GPR

Description: GPR[rt] \leftarrow FPR[fs]

The contents of FPR fs are sign-extended and loaded into general register rt.

Restrictions:**Operation:**

```

data  $\leftarrow$  ValueFPR(fs, UNINTERPRETED_WORD)31..0
GPR[rt]  $\leftarrow$  sign_extend(data)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Historical Information:For MIPS I, MIPS II, and MIPS III the contents of GPR rt are **UNPREDICTABLE** for the instruction immediately following MFC1.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	MFC2 0100110100	POOL32AXf 111100	6

Format: MFC2 rt, Impl

microMIPS

The syntax shown above is an example using MFC1 as a model. The specific syntax is implementation dependent.

Purpose: Move Word From Coprocessor 2

To copy a word from a COP2 general register to a GPR

Description: GPR[rt] \leftarrow CP2CPR[Impl]

The contents of the coprocessor 2 register denoted by the *Impl* field are sign-extended and placed into general register *rt*. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The results are **UNPREDICTABLE** if *Impl* specifies a coprocessor 2 register that does not exist.

Operation:

```
data  $\leftarrow$  CP2CPR[Impl]31..0
GPR[rt]  $\leftarrow$  sign_extend(data)
```

Exceptions:

Coprocessor Unusable

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	MFHC1 1100000	POOL32FXf 111011

Format: MFHC1 rt, fs**microMIPS****Purpose:** Move Word From High Half of Floating Point Register

To copy a word from the high half of an FPU (CP1) general register to a GPR

Description: $GPR[rt] \leftarrow \text{sign_extend}(FPR[fs]_{63..32})$

The contents of the high word of FPR *fs* are sign-extended and loaded into general register *rt*. This instruction is primarily intended to support 64-bit floating point units on a 32-bit CPU, but the semantics of the instruction are defined for all cases.

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The results are **UNPREDICTABLE** if $\text{Status}_{FR} = 0$ and *fs* is odd.

Operation:

```
data ← ValueFPR(fs, UNINTERPRETED_DOUBLEWORD)63..32
GPR[rt] ← sign_extend(data)
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	MFHC2 1000110100	POOL32AXf 111100	6

Format: MFHC2 rt, Impl**microMIPS**

The syntax shown above is an example using MFHC1 as a model. The specific syntax is implementation dependent.

Purpose: Move Word From High Half of Coprocessor 2 Register

To copy a word from the high half of a COP2 general register to a GPR

Description: $\text{GPR}[rt] \leftarrow \text{sign_extend}(\text{CP2CPR}[\text{Impl}]_{63..32})$

The contents of the high word of the coprocessor 2 register denoted by the *Impl* field are sign-extended and placed into GPR *rt*. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The results are **UNPREDICTABLE** if *Impl* specifies a coprocessor 2 register that does not exist, or if that register is not 64 bits wide.

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Operation:

```
data ← CP2CPR[Impl]63..32
GPR[rt] ← sign_extend(data)
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	0 00000	rs	MFHI32 0000110101	POOL32AXf 111100	6

Format: MFHI rs**microMIPS****Purpose:** Move From HI RegisterTo copy the special purpose *HI* register to a GPR**Description:** GPR[rs] \leftarrow HIThe contents of special register *HI* are loaded into GPR *rs*.**Restrictions:**

None

Operation:GPR[rs] \leftarrow HI**Exceptions:**

None

Historical Information:

In the MIPS I, II, and III architectures, the two instructions which follow the MFHI must not modify the *HI* register. If this restriction is violated, the result of the MFHI is **UNPREDICTABLE**. This restriction was removed in MIPS IV and MIPS32, and all subsequent levels of the architecture.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	0 00000	rs	MFLO32 0001110101	POOL32AXf 111100	6

Format: MFLO rs

microMIPS

Purpose: Move From LO RegisterTo copy the special purpose *LO* register to a GPR**Description:** GPR[rs] ← LOThe contents of special register *LO* are loaded into GPR *rs*.**Restrictions:**

None

Operation:

GPR[rs] ← LO

Exceptions:

None

Historical Information:

In the MIPS I, II, and III architectures, the two instructions which follow the MFLO must not modify the *HI* register. If this restriction is violated, the result of the MFLO is **UNPREDICTABLE**. This restriction was removed in MIPS IV and MIPS32, and all subsequent levels of the architecture.

31	26 25	21 20	16 15 14 13 12	6 5	0
POOL32F 010101	ft	fs	0 fmt	MOV 0000001	POOL32FXf 111011

6 5 5 1 2 7 6

Format: MOV.fmt

MOV.S ft, fs

microMIPS

MOV.D ft, fs

microMIPS

MOV.PS ft, fs

microMIPS

Purpose: Floating Point Move

To move an FP value between FPRs

Description: FPR[ft] \leftarrow FPR[fs]The value in FPR *fs* is placed into FPR *ft*. The source and destination are values in format *fmt*. In paired-single format, both the halves of the pair are copied to *ft*.

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields *fs* and *ft* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.The result of MOV.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**

StoreFPR(ft, fmt, ValueFPR(fs, fmt))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation

31	26 25	22 21 20	16 15 14 13 12	6 5	0
POOL32F 010101	rt	rs	cc	MOVF 0000101	POOL32FXf 111011

6 5 5 3 7 6

Format: MOVF rt, rs, cc**microMIPS****Purpose:** Move Conditional on Floating Point False

To test an FP condition code then conditionally move a GPR

Description: if FPConditionCode(cc) = 0 then GPR[rt] ← GPR[rs]

If the floating point condition code specified by CC is zero, then the contents of GPR rs are placed into GPR rt.

Restrictions:**Operation:**

```

if FPConditionCode(cc) = 0 then
    GPR[rt] ← GPR[rs]
endif

```

Exceptions:

Reserved Instruction, Coprocessor Unusable

31	26 25	21 20	16 15	13 12 11	10 9	8	5	0
POOL32F 010101	ft	fs	cc	0 00	fmt	MOVF 000100000	9	

Format:

- MOVF.fmt
- MOVF.S ft, fs, cc
- MOVF.D ft, fs, cc
- MOVF.PS ft, fs, cc

microMIPS
microMIPS
microMIPS
microMIPS

Purpose: Floating Point Move Conditional on Floating Point False

To test an FP condition code then conditionally move an FP value

Description: if $\text{FPConditionCode}(cc) = 0$ then $\text{FPR}[ft] \leftarrow \text{FPR}[fs]$

If the floating point condition code specified by CC is zero, then the value in $\text{FPR}[fs]$ is placed into $\text{FPR}[ft]$. The source and destination are values in format fmt .

If the condition code is not zero, then $\text{FPR}[fs]$ is not copied and $\text{FPR}[ft]$ retains its previous value in format fmt . If ft did not contain a value either in format fmt or previously unused data from a load or move-to operation that could be interpreted in format fmt , then the value of ft becomes **UNPREDICTABLE**.

MOVF.PS conditionally merges the lower half of $\text{FPR}[fs]$ into the lower half of $\text{FPR}[ft]$ if condition code CC is zero, and independently merges the upper half of $\text{FPR}[fs]$ into the upper half of $\text{FPR}[ft]$ if condition code $CC+1$ is zero. The CC field must be even; if it is odd, the result of this operation is **UNPREDICTABLE**.

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:

The fields fs and ft must specify FPRs valid for operands of type fmt ; if they are not valid, the result is **UNPREDICTABLE**. The operand must be a value in format fmt ; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of MOVF.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```

if fmt ≠ PS
    if FPConditionCode(cc) = 0 then
        StoreFPR(ft, fmt, ValueFPR(fs, fmt))
    else
        StoreFPR(ft, fmt, ValueFPR(ft, fmt))
    endif
else
    mask ← 0
    if FPConditionCode(cc+0) = 0 then mask ← mask or 0xF0 endif
    if FPConditionCode(cc+1) = 0 then mask ← mask or 0x0F endif
    StoreFPR(ft, PS, ByteMerge(mask, ft, fs))
endif

```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation

31	26 25	21 20	16 15	11 10 9	5	0
POOL32A 000000	rt	rs	rd	0	MOVN 0000011000	10

Format: MOVN rd, rs, rt

microMIPS

Purpose: Move Conditional on Not Zero

To conditionally move a GPR after testing a GPR value

Description: if GPR[rt] ≠ 0 then GPR[rd] ← GPR[rs]

If the value in GPR *rt* is not equal to zero, then the contents of GPR *rs* are placed into GPR *rd*.

Restrictions:

None

Operation:

```
if GPR[rt] ≠ 0 then
    GPR[rd] ← GPR[rs]
endif
```

Exceptions:

None

Programming Notes:

The non-zero value tested might be the *condition true* result from the SLT, SLTI, SLTU, and SLTIU comparison instructions or a boolean value read from memory.

31	26 25	21 20	16 15	11 10 9 8 7	0
POOL32F 010101	ft	fs	fd	0 fmt	MOVN 00111000

6 5 5 5 1 2 8

Format: MOVN.fmt
 MOVN.S fd, fs, rt
 MOVN.D fd, fs, rt
 MOVN.PS fd, fs, rt

microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Move Conditional on Not Zero

To test a GPR then conditionally move an FP value

Description: if GPR[rt] ≠ 0 then FPR[fd] ← FPR[fs]

If the value in GPR *rt* is not equal to zero, then the value in FPR *fs* is placed in FPR *fd*. The source and destination are values in format *fmt*.

If GPR *rt* contains zero, then FPR *fs* is not copied and FPR *fd* contains its previous value in format *fmt*. If *fd* did not contain a value either in format *fmt* or previously unused data from a load or move-to operation that could be interpreted in format *fmt*, then the value of *fd* becomes **UNPREDICTABLE**.

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:

The fields *fs* and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of MOVN.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
if GPR[rt] ≠ 0 then
  StoreFPR(fd, fmt, ValueFPR(fs, fmt))
else
  StoreFPR(fd, fmt, ValueFPR(fd, fmt))
endif
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation

31	26 25	22 21 20	16 15	13 12	6 5	0
POOL32F 010101	rt	rs	cc	MOVT 0100101	POOL32FXf 111011	

6 5 5 3 7 6

Format: MOVT rt, rs, cc**microMIPS****Purpose:** Move Conditional on Floating Point True

To test an FP condition code then conditionally move a GPR

Description: if FPConditionCode(cc) = 1 then GPR[rt] ← GPR[rs]

If the floating point condition code specified by CC is one, then the contents of GPR rs are placed into GPR rt.

Restrictions:**Operation:**

```

if FPConditionCode(cc) = 1 then
    GPR[rt] ← GPR[rs]
endif

```

Exceptions:

Reserved Instruction, Coprocessor Unusable

31	26 25	21 20	16 15	13 12 11	10 9 8	0
POOL32F 010101	ft	fs	cc	0 00	fmt	MOVT 001100000 9

Format: MOVT.fmt

MOVT.S ft, fs, cc

microMIPS

MOVT.D ft, fs, cc

microMIPS

MOVT.PS ft, fs, cc

microMIPS

Purpose: Floating Point Move Conditional on Floating Point True

To test an FP condition code then conditionally move an FP value

Description: if FPConditionCode(cc) = 1 then FPR[ft] ← FPR[fs]If the floating point condition code specified by CC is one, then the value in FPR *fs* is placed into FPR *ft*. The source and destination are values in format *fmt*.If the condition code is not one, then FPR *fs* is not copied and FPR *ft* contains its previous value in format *fmt*. If *ft* did not contain a value either in format *fmt* or previously unused data from a load or move-to operation that could be interpreted in format *fmt*, then the value of *ft* becomes **UNPREDICTABLE**.MOVT.PS conditionally merges the lower half of FPR *fs* into the lower half of FPR *ft* if condition code CC is one, and independently merges the upper half of FPR *fs* into the upper half of FPR *ft* if condition code CC+1 is one. The CC field should be even; if it is odd, the result of this operation is **UNPREDICTABLE**.

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields *fs* and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**. The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.The result of MOVT.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**

```

if fmt ≠ PS
    if FPConditionCode(cc) = 0 then
        StoreFPR(ft, fmt, ValueFPR(fs, fmt))
    else
        StoreFPR(ft, fmt, ValueFPR(ft, fmt))
    endif
else
    mask ← 0
    if FPConditionCode(cc+0) = 0 then mask ← mask or 0xF0 endif
    if FPConditionCode(cc+1) = 0 then mask ← mask or 0x0F endif
    StoreFPR(ft, PS, ByteMerge(mask, ft, fs))
endif

```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation

31	26 25	21 20	16 15	11 10 9	5	0
POOL32A 000000	rt	rs	rd	0	MOVZ 0001011000	10

Format: MOVZ rd, rs, rt

microMIPS

Purpose: Move Conditional on Zero

To conditionally move a GPR after testing a GPR value

Description: if GPR[rt] = 0 then GPR[rd] ← GPR[rs]

If the value in GPR *rt* is equal to zero, then the contents of GPR *rs* are placed into GPR *rd*.

Restrictions:

None

Operation:

```
if GPR[rt] = 0 then
    GPR[rd] ← GPR[rs]
endif
```

Exceptions:

None

Programming Notes:

The zero value tested might be the *condition false* result from the SLT, SLTI, SLTU, and SLTIU comparison instructions or a boolean value read from memory.

31	26 25	21 20	16 15	11 10 9 8 7	0
POOL32F 010101	ft	fs	fd	0 fmt	MOVZ 01111000

6 5 5 5 1 2 8

Format: MOVZ .fmt

MOVZ.S fd, fs, rt

microMIPS

MOVZ.D fd, fs, rt

microMIPS

MOVZ.PS fd, fs, rt

microMIPS

Purpose: Floating Point Move Conditional on Zero

To test a GPR then conditionally move an FP value

Description: if GPR[rt] = 0 then FPR[fd] ← FPR[fs]If the value in GPR *rt* is equal to zero then the value in FPR *fs* is placed in FPR *fd*. The source and destination are values in format *fmt*.If GPR *rt* is not zero, then FPR *fs* is not copied and FPR *fd* contains its previous value in format *fmt*. If *fd* did not contain a value either in format *fmt* or previously unused data from a load or move-to operation that could be interpreted in format *fmt*, then the value of *fd* becomes **UNPREDICTABLE**.

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields *fs* and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.The result of MOVZ.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**

```

if GPR[rt] = 0 then
    StoreFPR(fd, fmt, ValueFPR(fs, fmt))
else
    StoreFPR(fd, fmt, ValueFPR(fd, fmt))
endif

```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	MSUB 1110101100	POOL32AXf 111100	6

Format: MSUB rs, rt

microMIPS

Purpose: Multiply and Subtract Word to Hi,LoTo multiply two words and subtract the result from *HI, LO***Description:** $(HI, LO) \leftarrow (HI, LO) - (GPR[rs] \times GPR[rt])$

The 32-bit word value in GPR *rs* is multiplied by the 32-bit value in GPR *rt*, treating both operands as signed values, to produce a 64-bit result. The product is subtracted from the 64-bit concatenated values of $HI_{31..0}$ and $LO_{31..0}$. The most significant 32 bits of the result are sign-extended and written into *HI* and the least significant 32 bits are sign-extended and written into *LO*. No arithmetic exception occurs under any circumstances.

Restrictions:

If GPRs *rs* or *rt* do not contain sign-extended 32-bit values (bits **63..31** equal), then the results of the operation are **UNPREDICTABLE**.

This instruction does not provide the capability of writing directly to a target GPR.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp <- ( $HI_{31..0} || LO_{31..0}$ ) - (GPR[rs]31..0 × GPR[rt]31..0)
HI <- sign_extend(temp63..32)
LO <- sign_extend(temp31..0)

```

Exceptions:

None

Programming Notes:

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

	31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	fr	MSUB.S 100001		
	6	5	5	5	5	6	0
POOL32F 010101	ft	fs	fd	fr	MSUB.D 101001		
	6	5	5	5	5	6	0
POOL32F 010101	ft	fs	fd	fr	MSUB.PS 110001		
	6	5	5	5	5	6	0

Format: MSUB . fmt

MSUB.S fd, fr, fs, ft

microMIPS

MSUB.D fd, fr, fs, ft

microMIPS

MSUB.PS fd, fr, fs, ft

microMIPS

Purpose: Floating Point Multiply Subtract

To perform a combined multiply-then-subtract of FP values

Description: FPR[fd] \leftarrow (FPR[fs] \times FPR[ft]) - FPR[fr]

The value in FPR *fs* is multiplied by the value in FPR *ft* to produce an intermediate product. If *FIR_{Has2008}*=0 or *FCSR_{MAC2008}*=0 then the intermediate product is rounded according to the current rounding mode in *FCSR*. If *FCSR_{MAC2008}*=1 then the intermediate product is calculated to infinite precision. The value in FPR *fr* is subtracted from the product. The subtraction result is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, and placed into FPR *fd*. The operands and result are values in format *fmt*.

If *FIR_{Has2008}*=0 or *FCSR_{MAC2008}*=0 then the results and flags are as if separate floating-point multiply and subtract instructions were executed. If *FCSR_{MAC2008}*=1, the multiply operation can only signal invalid operation among the IEEE exceptions.

MSUB.PS multiplies then subtracts the upper and lower halves of FPR *fr*, FPR *fs*, and FPR *ft* independently, and ORs together any generated exceptional conditions.

Cause bits are ORed into the *Flag* bits if no exception is taken.

Restrictions:

The fields *fr*, *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of MSUB.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
vfr  $\leftarrow$  ValueFPR(fr, fmt)
vfs  $\leftarrow$  ValueFPR(fs, fmt)
vft  $\leftarrow$  ValueFPR(ft, fmt)
StoreFPR(fd, fmt, (vfs  $\times_{\text{fmt}}$  vft) -fmt vfr))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Unimplemented Operation, Invalid Operation, Overflow, Underflow

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	MSUBU 1111101100	POOL32AXf 111100	6

Format: MSUBU rs, rt**microMIPS****Purpose:** Multiply and Subtract Word to Hi,LoTo multiply two words and subtract the result from *HI, LO***Description:** $(HI, LO) \leftarrow (HI, LO) - (GPR[rs] \times GPR[rt])$

The 32-bit word value in GPR *rs* is multiplied by the 32-bit word value in GPR *rt*, treating both operands as unsigned values, to produce a 64-bit result. The product is subtracted from the 64-bit concatenated values of $HI_{31..0}$ and $LO_{31..0}$. The most significant 32 bits of the result are sign-extended and written into *HI* and the least significant 32 bits are sign-extended and written into *LO*. No arithmetic exception occurs under any circumstances.

Restrictions:

If GPRs *rs* or *rt* do not contain sign-extended 32-bit values (bits **63..31** equal), then the results of the operation are **UNPREDICTABLE**.

This instruction does not provide the capability of writing directly to a target GPR.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp <- ( $HI_{31..0} || LO_{31..0}$ ) - (( $0^{32} || GPR[rs]_{31..0}$ )  $\times$  ( $0^{32} || GPR[rt]_{31..0}$ ))
HI <- sign_extend(temp63..32)
LO <- sign_extend(temp31..0)

```

Exceptions:

None

Programming Notes:

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

31	26 25	21 20	16 15 14	13	11 10	6 5	0
POOL32A 000000	rt	rs	00	sel	MTC0 01011	POOL32AXf 111100	6

Format: MTC0 rt, rs
MTC0 rt, rs, sel

microMIPS
microMIPS

Purpose: Move to Coprocessor 0

To move the contents of a general register to a coprocessor 0 register.

Description: CPR[0, rs, sel] \leftarrow GPR[rt]

The contents of general register rt are loaded into the coprocessor 0 register specified by the combination of rs and sel. Not all coprocessor 0 registers support the the sel field. In those instances, the sel field must be set to zero.

When the coprocessor 0 destination register specified is the *EntryLo0* or the *EntryLo1* register, bits 31:30 appear at the RI/XI fields of the destination register. This feature supports MIPS32 backward compatibility on a MIPS64 system.

Restrictions:

The results are **UNDEFINED** if coprocessor 0 does not contain a register as specified by rs and sel.

Operation:

```

data  $\leftarrow$  GPR[rt]
reg  $\leftarrow$  rs
if (reg,sel = EntryLo1 or reg,sel = EntryLo0) then
    CPR[0,reg,sel]29..0  $\leftarrow$  data29..0
    CPR[0,reg,sel]63  $\leftarrow$  data31
    CPR[0,reg,sel]62  $\leftarrow$  data30
    CPR[0,reg,sel]61:30  $\leftarrow$  032
else if (Width(CPR[0,reg,sel]) = 64) then
    CPR[0,reg,sel]  $\leftarrow$  data
else
    CPR[0,reg,sel]  $\leftarrow$  data31..0
endif

```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	MTC1 10100000	POOL32FXf 111011

Format: MTC1 rt, fs**microMIPS****Purpose:** Move Word to Floating Point

To copy a word from a GPR to an FPU (CP1) general register

Description: $FPR[fs] \leftarrow GPR[rt]$ The low word in GPR *rt* is placed into the low word of FPR *fs*. If FPRs are 64 bits wide, bits 63..32 of FPR *fs* become **UNPREDICTABLE**.**Restrictions:****Operation:**

```
data ← GPR[rt]31..0
StoreFPR(fs, UNINTERPRETED_WORD, data)
```

Exceptions:

Coprocessor Unusable

Historical Information:For MIPS I, MIPS II, and MIPS III the value of FPR *fs* is **UNPREDICTABLE** for the instruction immediately following MTC1.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	MTC2 0101110100	POOL32AXf 111100	6

Format: MTC2 rt, Impl

microMIPS

The syntax shown above is an example using MTC1 as a model. The specific syntax is implementation dependent.

Purpose: Move Word to Coprocessor 2

To copy a word from a GPR to a COP2 general register

Description: CP2CPR[*Impl*] \leftarrow GPR[*rt*]

The low word in GPR *rt* is placed into the low word of coprocessor 2 general register denoted by the *Impl* field. If coprocessor 2 general registers are 64 bits wide, bits 63..32 of the register denoted by the *Impl* field become **UNPREDICTABLE**. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The results are **UNPREDICTABLE** if *Impl* specifies a coprocessor 2 register that does not exist.

Operation:

```
data  $\leftarrow$  GPR[rt]31..0
CP2CPR[Impl]  $\leftarrow$  data
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	rt	fs	00	MTHC1 11100000	POOL32FXf 111011

Format: MTHC1 rt, fs**microMIPS****Purpose:** Move Word to High Half of Floating Point Register

To copy a word from a GPR to the high half of an FPU (CP1) general register

Description: $FPR[fs]_{63..32} \leftarrow GPR[rt]_{31..0}$ The low word in GPR *rt* is placed into the high word of FPR *fs*. This instruction is primarily intended to support 64-bit floating point units on a 32-bit CPU, but the semantics of the instruction are defined for all cases.**Restrictions:**

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

The results are **UNPREDICTABLE** if $Status_{FR} = 0$ and *fs* is odd.**Operation:**

```

newdata ← GPR[rt]_{31..0}
olddata ← ValueFPR(fs, UNINTERPRETED_DOUBLEWORD)_{31..0}
StoreFPR(fs, UNINTERPRETED_DOUBLEWORD, newdata || olddata)

```

Exceptions:

Coprocessor Unusable

Reserved Instruction

Programming NotesWhen paired with MTC1 to write a value to a 64-bit FPR, the MTC1 must be executed first, followed by the MTHC1. This is because of the semantic definition of MTC1, which is not aware that software will be using an MTHC1 instruction to complete the operation, and sets the upper half of the 64-bit FPR to an **UNPREDICTABLE** value.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	Impl	MTHC2 1001110100	POOL32AXf 111100	6

Format: MTHC2 rt, Impl**microMIPS**

The syntax shown above is an example using MTHC1 as a model. The specific syntax is implementation dependent.

Purpose: Move Word to High Half of Coprocessor 2 Register

To copy a word from a GPR to the high half of a COP2 general register

Description: $CP2CPR[Impl]_{63..32} \leftarrow GPR[rt]_{31..0}$

The low word in GPR *rt* is placed into the high word of coprocessor 2 general register denoted by the *Impl* field. The interpretation of the *Impl* field is left entirely to the Coprocessor 2 implementation and is not specified by the architecture.

Restrictions:

The results are **UNPREDICTABLE** if *Impl* specifies a coprocessor 2 register that does not exist, or if that register is not 64 bits wide.

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

Operation:

```
data ← GPR[rt]31..0
CP2CPR[Impl] ← data || CPR[2,rd,sel]31..0
```

Exceptions:

Coprocessor Unusable

Reserved Instruction

Programming Notes

When paired with MTC2 to write a value to a 64-bit CPR, the MTC2 must be executed first, followed by the MTHC2. This is because of the semantic definition of MTC2, which is not aware that software will be using an MTHC2 instruction to complete the operation, and sets the upper half of the 64-bit CPR to an **UNPREDICTABLE** value.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	0 00000	rs	MTHI 0010110101	POOL32AXf 111100	6

Format: MTHI rs

microMIPS

Purpose: Move to HI RegisterTo copy a GPR to the special purpose *HI* register**Description:** HI ← GPR[rs]The contents of GPR *rs* are loaded into special register *HI*.**Restrictions:**

A computed result written to the *HI/LO* pair by DIV, DIVU, DDIV, DDIVU, DMULT, DMULTU, MULT, or MULTU must be read by MFHI or MFLO before a new result can be written into either *HI* or *LO*.

If an MTHI instruction is executed following one of these arithmetic instructions, but before an MFLO or MFHI instruction, the contents of *LO* are **UNPREDICTABLE**. The following example shows this illegal situation:

```

MULT    r2,r4  # start operation that will eventually write to HI,LO
...
        # code not containing mfhi or mflo
MTHI    r6
...
        # code not containing mflo
MFLO    r3      # this mflo would get an UNPREDICTABLE value

```

Operation:

HI ← GPR[rs]

Exceptions:

None

Historical Information:

In MIPS I-III, if either of the two preceding instructions is MFHI, the result of that MFHI is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from any subsequent instructions that write to them by two or more instructions. In MIPS IV and later, including MIPS32 and MIPS64, this restriction does not exist.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	0 00000	rs	MTLO 0011110101	POOL32AXf 111100	6

Format: MTLO rs

microMIPS

Purpose: Move to LO RegisterTo copy a GPR to the special purpose *LO* register**Description:** LO \leftarrow GPR[rs]The contents of GPR *rs* are loaded into special register *LO*.**Restrictions:**

A computed result written to the *HI/LO* pair by DIV, DIVU, DDIV, DDIVU, DMULT, DMULTU, MULT, or MULTU must be read by MFHI or MFLO before a new result can be written into either *HI* or *LO*.

If an MTLO instruction is executed following one of these arithmetic instructions, but before an MFLO or MFHI instruction, the contents of *HI* are **UNPREDICTABLE**. The following example shows this illegal situation:

```
MULT    r2,r4  # start operation that will eventually write to HI,LO
...
        # code not containing mfhi or mflo
MTLO    r6
...
        # code not containing mfhi
MFHI    r3      # this mfhi would get an UNPREDICTABLE value
```

Operation:LO \leftarrow GPR[rs]**Exceptions:**

None

Historical Information:

In MIPS I-III, if either of the two preceding instructions is MFHI, the result of that MFHI is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from any subsequent instructions that write to them by two or more instructions. In MIPS IV and later, including MIPS32 and MIPS64, this restriction does not exist.

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	MUL 1000010000

Format: MUL rd, rs, rt

microMIPS

Purpose: Multiply Word to GPR

To multiply two words and write the result to a GPR.

Description: $\text{GPR}[rd] \leftarrow \text{GPR}[rs] \times \text{GPR}[rt]$

The 32-bit word value in GPR *rs* is multiplied by the 32-bit value in GPR *rt*, treating both operands as signed values, to produce a 64-bit result. The least significant 32 bits of the product are sign-extended and written to GPR *rd*. The contents of *HI* and *LO* are **UNPREDICTABLE** after the operation. No arithmetic exception occurs under any circumstances.

Restrictions:

On 64-bit processors, if either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Note that this instruction does not provide the capability of writing the result to the *HI* and *LO* registers.

Operation:

```

if (NotWordValue(GPR[rs]) or NotWordValue(GPR[rt])) then
    UNPREDICTABLE
endif
temp ← GPR[rs] × GPR[rt]
GPR[rd] ← sign_extend(temp31..0)
HI ← UNPREDICTABLE
LO ← UNPREDICTABLE

```

Exceptions:

None

Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read GPR *rd* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

31	26 25	21 20	16 15	11 10 9 8 7	0
POOL32F 010101	ft	fs	fd	0 fmt	MUL 10110000

6 5 5 5 1 2 8

Format: MUL(fmt)
 MUL.S fd, fs, ft
 MUL.D fd, fs, ft
 MUL.PS fd, fs, ft

microMIPS
 microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Multiply

To multiply FP values

Description: $FPR[fd] \leftarrow FPR[fs] \times FPR[ft]$

The value in FPR *fs* is multiplied by the value in FPR *ft*. The result is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, and placed into FPR *fd*. The operands and result are values in format *fmt*. MUL.PS multiplies the upper and lower halves of FPR *fs* and FPR *ft* independently, and ORs together any generated exceptional conditions.

Restrictions:

The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of MUL.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

StoreFPR (fd, fmt, ValueFPR(fs, fmt) \times_{fmt} ValueFPR(ft, fmt))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Unimplemented Operation, Invalid Operation, Overflow, Underflow

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	MULT 1000101100	POOL32AXf 111100	6

Format: MULT rs, rt

microMIPS

Purpose: Multiply Word

To multiply 32-bit signed integers

Description: $(HI, LO) \leftarrow GPR[rs] \times GPR[rt]$

The 32-bit word value in GPR *rt* is multiplied by the 32-bit value in GPR *rs*, treating both operands as signed values, to produce a 64-bit result. The low-order 32-bit word of the result is sign-extended and placed into special register *LO*, and the high-order 32-bit word is sign-extended and placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

On 64-bit processors, if either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[rs]) or NotWordValue(GPR[rt])) then
    UNPREDICTABLE
endif
prod ← GPR[rs]31..0 × GPR[rt]31..0
LO ← sign_extend(prod31..0)
HI ← sign_extend(prod63..32)

```

Exceptions:

None

Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	MULTU 1001101100	POOL32AXf 111100	6

Format: MULTU rs, rt

microMIPS

Purpose: Multiply Unsigned Word

To multiply 32-bit unsigned integers

Description: $(HI, LO) \leftarrow GPR[rs] \times GPR[rt]$

The 32-bit word value in GPR *rt* is multiplied by the 32-bit value in GPR *rs*, treating both operands as unsigned values, to produce a 64-bit result. The low-order 32-bit word of the result is sign-extended and placed into special register *LO*, and the high-order 32-bit word is sign-extended and placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

On 64-bit processors, if either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
prod ← (0 || GPR[rs]31..0) × (0 || GPR[rt]31..0)
LO ← sign_extend(prod31..0)
HI ← sign_extend(prod63..32)

```

Exceptions:

None

Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

31	26 25	21 20	16 15 14 13 12	6 5	0
POOL32F 010101	ft	fs	0 fmt	NEG 0101101	POOL32FXf 111011

6 5 5 1 2 7 6

Format: NEG.*fmt*
 NEG.S *ft*, *fs*
 NEG.D *ft*, *fs*
 NEG.PS *ft*, *fs*

microMIPS
 microMIPS
 microMIPS

Purpose: Floating Point Negate

To negate an FP value

Description: $FPR[ft] \leftarrow -FPR[fs]$

The value in FPR *fs* is negated and placed into FPR *ft*. The value is negated by changing the sign bit value. The operand and result are values in format *fmt*. NEG.PS negates the upper and lower halves of FPR *fs* independently, and ORs together any generated exceptional conditions.

If $FIR_{Has2008}=0$ or $FCSR_{ABS2008}=0$ then this operation is arithmetic. For this case , any NaN operand signals invalid operation.

If $FCSR_{ABS2008}=1$ then this operation is non-arithmetic. For this case, both regular floating point numbers and NAN values are treated alike, only the sign bit is affected by this instruction. No IEEE exception can be generated for this case.

Restrictions:

The fields *fs* and *ft* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**. The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of NEG.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
StoreFPR(ft, fmt, Negate(ValueFPR(fs, fmt)))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation, Invalid Operation

31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	fr	NMADD.S 000010	
6	5	5	5	5	5	6
31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	fr	NMADD.D 001010	
6	5	5	5	5	5	6
31	26 25	21 20	16 15	11 10	6 5	0
POOL32F 010101	ft	fs	fd	fr	NMADD.PS 010010	
6	5	5	5	5	5	6

Format: NMADD.fmt

NMADD.S fd, fr, fs, ft

microMIPS

NMADD.D fd, fr, fs, ft

microMIPS

NMADD.PS fd, fr, fs, ft

microMIPS

Purpose: Floating Point Negative Multiply Add

To negate a combined multiply-then-add of FP values

Description: $FPR[fd] \leftarrow -((FPR[fs] \times FPR[ft]) + FPR[fr])$

The value in FPR *fs* is multiplied by the value in FPR *ft* to produce an intermediate product. If *FIR_{Has2008}*=0 or *FCSR_{MAC2008}*=0 then the intermediate product is rounded according to the current rounding mode in *FCSR*. If *FCSR_{MAC2008}*=1 then the intermediate product is calculated to infinite precision. The value in FPR *fr* is added to the product.

The result sum is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, negated by changing the sign bit, and placed into FPR *fd*. The operands and result are values in format *fmt*.

If *FIR_{Has2008}*=0 or *FCSR_{MAC2008}*=0 then the results and flags are as if separate floating-point multiply and add and negate instructions were executed. If *FCSR_{MAC2008}*=1, the multiply operation can only signal invalid operation among the IEEE exceptions. If *FCSR_{MAC2008}*=1, the negate portion of the instruction is arithmetic (regardless of the setting of *FCSR_{ABS2008}*) and will not invert the sign bit of QNAN result coming from the sum portion of the instruction.

NMADD.PS applies the operation to the upper and lower halves of FPR *fr*, FPR *fs*, and FPR *ft* independently, and ORs together any generated exceptional conditions.

Cause bits are ORed into the *Flag* bits if no exception is taken.

Restrictions:

The fields *fr*, *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of NMADD.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
vfr ← ValueFPR(fr, fmt)
vfs ← ValueFPR(fs, fmt)
vft ← ValueFPR(ft, fmt)
StoreFPR(fd, fmt, -(vfr +fmt (vfs ×fmt vft)))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Unimplemented Operation, Invalid Operation, Overflow, Underflow

31	26	25	21	20	16	15	11	10	6	5	0
POOL32F 010101	ft	fs		fd		fr		NMSUB.S 100010			
6	5	5	5	5	5	5	5	6	5	6	0
31	26	25	21	20	16	15	11	10	6	5	0
POOL32F 010101	ft	fs		fd		fr		NMSUB.D 101010			
6	5	5	5	5	5	5	5	6	5	6	0
31	26	25	21	20	16	15	11	10	6	5	0
POOL32F 010101	ft	fs		fd		fr		NMSUB.PS 110010			
6	5	5	5	5	5	5	5	6	5	6	0

Format: NMSUB.fmt

NMSUB.S fd, fr, fs, ft

NMSUB.D fd, fr, fs, ft

NMSUB.PS fd, fr, fs, ft

microMIPS

microMIPS

microMIPS

Purpose: Floating Point Negative Multiply Subtract

To negate a combined multiply-then-subtract of FP values

Description: $FPR[fd] \leftarrow - ((FPR[fs] \times FPR[ft]) - FPR[fr])$

The value in FPR fs is multiplied by the value in FPR ft to produce an intermediate product. If $FIR_{Has2008}=0$ or $FCSR_{MAC2008}=0$ then the intermediate product is rounded according to the current rounding mode in $FCSR$. If $FCSR_{MAC2008}=1$ then the intermediate product is calculated to infinite precision. The value in FPR fr is subtracted from the product.

The result is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, negated by changing the sign bit, and placed into FPR *fd*. The operands and result are values in format *fmt*.

If $FIR_{Has2008}=0$ or $FCSR_{MAC2008}=0$ then the results and flags are as if separate floating-point multiply and subtract and negate instructions were executed. If $FCSR_{MAC2008}=1$, the multiply operation can only signal invalid operation among the IEEE exceptions. If $FCSR_{MAC2008}=1$, the negate portion of the instruction is arithmetic (regardless of the setting of $FCSR_{ABS2008}$) and will not invert the sign bit of QNAN result coming from the sum portion of the instruction.

NMSUB.PS applies the operation to the upper and lower halves of FPR *fr*, FPR *fs*, and FPR *ft* independently, and ORs together any generated exceptional conditions.

Cause bits are ORed into the *Flag* bits if no exception is taken.

Restrictions:

The fields *fr*, *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of NMSUB.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
vfr ← ValueFPR(fr, fmt)
vfs ← ValueFPR(fs, fmt)
vft ← ValueFPR(ft, fmt)
StoreFPR(fd, fmt, -((vfs ×fmt vft) −fmt vfr))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Unimplemented Operation, Invalid Operation, Overflow, Underflow

No Operation

NOP

31	26 25	21 20	16 15	11 10	5	0
	POOL32A 000000	0 00000	0 00000	0 00000	0 00000	SLL 000000

Format: NOP

Assembly Idiom microMIPS

Purpose: No Operation

To perform no operation.

Description:

NOP is the assembly idiom used to denote no operation. The actual instruction is interpreted by the hardware as SLL r0, r0, 0.

Restrictions:

None

Operation:

None

Exceptions:

None

Programming Notes:

The zero instruction word, which represents SLL, r0, r0, 0, is the preferred NOP for software to use to fill branch and jump delay slots and to pad out alignment sequences.

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	NOR 1011010000

Format: NOR rd, rs, rt

microMIPS

Purpose: Not Or

To do a bitwise logical NOT OR

Description: $GPR[rd] \leftarrow GPR[rs] \text{ NOR } GPR[rt]$

The contents of GPR *rs* are combined with the contents of GPR *rt* in a bitwise logical NOR operation. The result is placed into GPR *rd*.

Restrictions:

None

Operation:

$GPR[rd] \leftarrow GPR[rs] \text{ nor } GPR[rt]$

Exceptions:

None

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	OR 1010010000

Format: OR rd, rs, rt

microMIPS

Purpose: Or

To do a bitwise logical OR

Description: $GPR[rd] \leftarrow GPR[rs] \text{ or } GPR[rt]$

The contents of GPR *rs* are combined with the contents of GPR *rt* in a bitwise logical OR operation. The result is placed into GPR *rd*.

Restrictions:

None

Operation:

$GPR[rd] \leftarrow GPR[rs] \text{ or } GPR[rt]$

Exceptions:

None

31	26 25	21 20	16 15	0
ORI32 010100	rt	rs	immediate	

6 5 5 16

Format: ORI rt, rs, immediate**microMIPS****Purpose:** Or Immediate

To do a bitwise logical OR with a constant

Description: GPR[rt] \leftarrow GPR[rs] or immediateThe 16-bit *immediate* is zero-extended to the left and combined with the contents of GPR *rs* in a bitwise logical OR operation. The result is placed into GPR *rt*.**Restrictions:**

None

Operation:GPR[rt] \leftarrow GPR[rs] or zero_extend(immediate)**Exceptions:**

None

31	26 25				6 5	0
POOL32A 000000	0 00000	0 00000	5 00101	0 00000	SLL 000000	6

Format: PAUSE**microMIPS****Purpose:** Wait for the LLBit to clear**Description:**

Locks implemented using the LL/SC (or LLD/SCD) instructions are a common method of synchronization between threads of control. A typical lock implementation does a load-linked instruction and checks the value returned to determine whether the software lock is set. If it is, the code branches back to retry the load-linked instruction, thereby implementing an active busy-wait sequence. The PAUSE instruction is intended to be placed into the busy-wait sequence to block the instruction stream until such time as the load-linked instruction has a chance to succeed in obtaining the software lock.

The precise behavior of the PAUSE instruction is implementation-dependent, but it usually involves descheduling the instruction stream until the LLBit is zero. In a single-threaded processor, this may be implemented as a short-term WAIT operation which resumes at the next instruction when the LLBit is zero or on some other external event such as an interrupt. On a multi-threaded processor, this may be implemented as a short term YIELD operation which resumes at the next instruction when the LLBit is zero. In either case, it is assumed that the instruction stream which gives up the software lock does so via a write to the lock variable, which causes the processor to clear the LLBit as seen by this thread of execution.

The encoding of the instruction is such that it is backward compatible with all previous implementations of the architecture. The PAUSE instruction can therefore be placed into existing lock sequences and treated as a NOP by the processor, even if the processor does not implement the PAUSE instruction.

Restrictions:

The operation of the processor is **UNPREDICTABLE** if a PAUSE instruction is placed in the delay slot of a branch or a jump.

Operation:

```
if LLBit ≠ 0 then
    EPC ← PC + 4
    DescheduleInstructionStream()
endif
```

Exceptions:

None

Programming Notes:

The PAUSE instruction is intended to be inserted into the instruction stream after an LL instruction has set the LLBit and found the software lock set. The program may wait forever if a PAUSE instruction is executed and there is no possibility that the LLBit will ever be cleared.

An example use of the PAUSE instruction is included in the following example:

```
acquire_lock:
```

```
    ll      t0, 0(a0)          /* Read software lock, set hardware lock */
    bnez  t0, acquire_lock_retry: /* Branch if software lock is taken */
    addiu t0, t0, 1            /* Set the software lock */
    sc     t0, 0(a0)          /* Try to store the software lock */
    bnez  t0, 10f             /* Branch if lock acquired successfully */
    sync
acquire_lock_retry:
    pause                  /* Wait for LLBIT to clear before retry */
    b      acquire_lock       /* and retry the operation */
    nop
10:
    Critical region code

release_lock:
    sync
    sw     zero, 0(a0)        /* Release software lock, clearing LLBIT */
    /* for any PAUSED waiters */
```

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	ft	fs	fd	00	PLL.PS 010000000

Format: PLL.PS fd, fs, ft

microMIPS

Purpose: Pair Lower Lower

To merge a pair of paired single values with realignment

Description: $FPR[fd] \leftarrow \text{lower}(FPR[fs]) \mid\mid \text{lower}(FPR[ft])$

A new paired-single value is formed by catenating the lower single of FPR *fs* (bits 31..0) and the lower single of FPR *ft* (bits 31..0).

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:

The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *PS*. If they are not valid, the result is **UNPREDICTABLE**.

The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

`StoreFPR(fd, PS, ValueFPR(fs, PS)31..0 || ValueFPR(ft, PS)31..0)`

Exceptions:

Coprocessor Unusable, Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	ft	fs	fd	00	PLU.PS 011000000

6 5 5 5 2 9

Format: PLU.PS fd, fs, ft**microMIPS****Purpose:** Pair Lower Upper


To merge a pair of paired single values with realignment

Description: $FPR[fd] \leftarrow \text{lower}(FPR[fs]) \mid\mid \text{upper}(FPR[ft])$ A new paired-single value is formed by catenating the lower single of FPR *fs* (bits 31..0) and the upper single of FPR *ft* (bits 63..32).

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *PS*. If they are not valid, the result is **UNPREDICTABLE**.The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:**`StoreFPR(fd, PS, ValueFPR(fs, PS)31..0 || ValueFPR(ft, PS)63..32)`**Exceptions:**

Coprocessor Unusable, Reserved Instruction

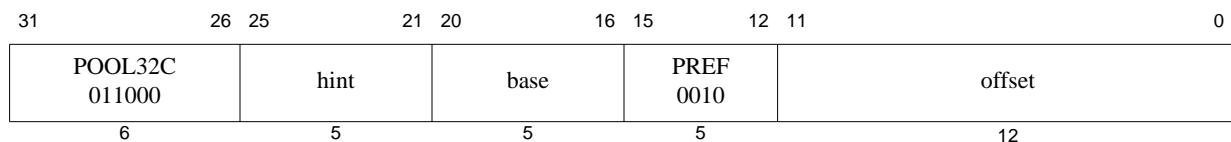

Format: PREF hint,offset(base)

microMIPS

Purpose: Prefetch

To move data between memory and cache.

Description: prefetch_memory(GPR[base] + offset)

PREF adds the 12-bit signed *offset* to the contents of GPR *base* to form an effective byte address. The *hint* field supplies information about the way that the data is expected to be used.

PREF enables the processor to take some action, typically causing data to be moved to or from the cache, to improve program performance. The action taken for a specific PREF instruction is both system and context dependent. Any action, including doing nothing, is permitted as long as it does not change architecturally visible state or alter the meaning of a program. Implementations are expected either to do nothing, or to take an action that increases the performance of the program. The PrepareForStore function is unique in that it may modify the architecturally visible state.

PREF does not cause addressing-related exceptions, including TLB exceptions. If the address specified would cause an addressing exception, the exception condition is ignored and no data movement occurs. However even if no data is moved, some action that is not architecturally visible, such as writeback of a dirty cache line, can take place.

It is implementation dependent whether a Bus Error or Cache Error exception is reported if such an error is detected as a byproduct of the action taken by the PREF instruction.

PREF neither generates a memory operation nor modifies the state of a cache line for a location with an *uncached* memory access type, whether this type is specified by the address segment (e.g., kseg1), the programmed cacheability and coherency attribute of a segment (e.g., the use of the K0, KU, or K23 fields in the *Config* register), or the per-page cacheability and coherency attribute provided by the TLB.

If PREF results in a memory operation, the memory access type and cacheability&coherency attribute used for the operation are determined by the memory access type and cacheability&coherency attribute of the effective address, just as it would be if the memory operation had been caused by a load or store to the effective address.

For a cached location, the expected and useful action for the processor is to prefetch a block of data that includes the effective address. The size of the block and the level of the memory hierarchy it is fetched into are implementation specific.

In coherent multiprocessor implementations, if the effective address uses a coherent Cacheability and Coherency Attribute (CCA), then the instruction causes a coherent memory transaction to occur. This means a prefetch issued on one processor can cause data to be evicted from the cache in another processor.

The PREF instruction and the memory transactions which are sourced by the PREF instruction, such as cache refill or cache writeback, obey the ordering and completion rules of the SYNC instruction.

Table 5.25 Values of *hint* Field for PREF Instruction

Value	Name	Data Use and Desired Prefetch Action
0	load	Use: Prefetched data is expected to be read (not modified). Action: Fetch data as if for a load.

Table 5.25 Values of *hint* Field for PREF Instruction

1	store	Use: Prefetched data is expected to be stored or modified. Action: Fetch data as if for a store.
2-3	Reserved	Reserved for future use - not available to implementations.
4	load_streamed	Use: Prefetched data is expected to be read (not modified) but not reused extensively; it “streams” through cache. Action: Fetch data as if for a load and place it in the cache so that it does not displace data prefetched as “retained.”
5	store_streamed	Use: Prefetched data is expected to be stored or modified but not reused extensively; it “streams” through cache. Action: Fetch data as if for a store and place it in the cache so that it does not displace data prefetched as “retained.”
6	load_retained	Use: Prefetched data is expected to be read (not modified) and reused extensively; it should be “retained” in the cache. Action: Fetch data as if for a load and place it in the cache so that it is not displaced by data prefetched as “streamed.”
7	store_retained	Use: Prefetched data is expected to be stored or modified and reused extensively; it should be “retained” in the cache. Action: Fetch data as if for a store and place it in the cache so that it is not displaced by data prefetched as “streamed.”
8-20	Reserved	Reserved for future use - not available to implementations.
21-24	Implementation Dependent	Unassigned by the Architecture - available for implementation-dependent use.
25	writeback_invalidate (also known as “nudge”)	Use: Data is no longer expected to be used. Action: For a writeback cache, schedule a writeback of any dirty data. At the completion of the writeback, mark the state of any cache lines written back as invalid. If the cache line is not dirty, it is implementation dependent whether the state of the cache line is marked invalid or left unchanged. If the cache line is locked, no action is taken.
26-29	Implementation Dependent	Unassigned by the Architecture - available for implementation-dependent use.

Table 5.25 Values of *hint* Field for PREF Instruction

30	PrepareForStore	Use: Prepare the cache for writing an entire line, without the overhead involved in filling the line from memory. Action: If the reference hits in the cache, no action is taken. If the reference misses in the cache, a line is selected for replacement, any valid and dirty victim is written back to memory, the entire line is filled with zero data, and the state of the line is marked as valid and dirty. Programming Note: Because the cache line is filled with zero data on a cache miss, software must not assume that this action, in and of itself, can be used as a fast bzero-type function.
31	Implementation Dependent	Unassigned by the Architecture - available for implementation-dependent use.

Restrictions:

None

Operation:

```
vAddr ← GPR[base] + sign_extend(offset)
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
Prefetch(CCA, pAddr, vAddr, DATA, hint)
```

Exceptions:

Bus Error, Cache Error

Prefetch does not take any TLB-related or address-related exceptions under any circumstances.

Programming Notes:

Prefetch cannot move data to or from a mapped location unless the translation for that location is present in the TLB. Locations in memory pages that have not been accessed recently may not have translations in the TLB, so prefetch may not be effective for such locations.

Prefetch does not cause addressing exceptions. A prefetch may be used using an address pointer before the validity of the pointer is determined without worrying about an addressing exception.

It is implementation dependent whether a Bus Error or Cache Error exception is reported if such an error is detected as a byproduct of the action taken by the PREF instruction. Typically, this only occurs in systems which have high-reliability requirements.

Prefetch operations have no effect on cache lines that were previously locked with the CACHE instruction.

Hint field encodings whose function is described as “streamed” or “retained” convey usage intent from software to hardware. Software should not assume that hardware will always prefetch data in an optimal way. If data is to be truly retained, software should use the Cache instruction to lock data into the cache.

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	hint	base	ST-EVA 1010	PREFE 010	offset	

6 5 5 4 3 9

Format: PREFE hint,offset(base)

microMIPS

Purpose: Prefetch EVA

To move data between user mode virtual address space memory and cache while operating in kernel mode.

Description: prefetch_memory(GPR[base] + offset)

PREFE adds the 9-bit signed *offset* to the contents of GPR *base* to form an effective byte address. The *hint* field supplies information about the way that the data is expected to be used.

PREFE enables the processor to take some action, typically causing data to be moved to or from the cache, to improve program performance. The action taken for a specific PREFE instruction is both system and context dependent. Any action, including doing nothing, is permitted as long as it does not change architecturally visible state or alter the meaning of a program. Implementations are expected either to do nothing, or to take an action that increases the performance of the program. The PrepareForStore function is unique in that it may modify the architecturally visible state.

PREFE does not cause addressing-related exceptions, including TLB exceptions. If the address specified would cause an addressing exception, the exception condition is ignored and no data movement occurs. However even if no data is moved, some action that is not architecturally visible, such as writeback of a dirty cache line, can take place.

It is implementation dependent whether a Bus Error or Cache Error exception is reported if such an error is detected as a byproduct of the action taken by the PREFE instruction.

PREFE neither generates a memory operation nor modifies the state of a cache line for a location with an *uncached* memory access type, whether this type is specified by the address segment (e.g., kseg1), the programmed cacheability and coherency attribute of a segment (e.g., the use of the K0, KU, or K23 fields in the *Config* register), or the per-page cacheability and coherency attribute provided by the TLB.

If PREFE results in a memory operation, the memory access type and cacheability&coherency attribute used for the operation are determined by the memory access type and cacheability&coherency attribute of the effective address, just as it would be if the memory operation had been caused by a load or store to the effective address.

For a cached location, the expected and useful action for the processor is to prefetch a block of data that includes the effective address. The size of the block and the level of the memory hierarchy it is fetched into are implementation specific.

In coherent multiprocessor implementations, if the effective address uses a coherent Cacheability and Coherency Attribute (CCA), then the instruction causes a coherent memory transaction to occur. This means a prefetch issued on one processor can cause data to be evicted from the cache in another processor.

The PREFE instruction and the memory transactions which are sourced by the PREFE instruction, such as cache refill or cache writeback, obey the ordering and completion rules of the SYNC instruction.

The PREFE instruction functions in exactly the same fashion as the PREF instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the *Config5_EVA* field being set to one.

Table 5.26 Values of *hint* Field for PREFE Instruction

Value	Name	Data Use and Desired Prefetch Action
0	load	Use: Prefetched data is expected to be read (not modified). Action: Fetch data as if for a load.
1	store	Use: Prefetched data is expected to be stored or modified. Action: Fetch data as if for a store.
2-3	Reserved	Reserved for future use - not available to implementations.
4	load_streamed	Use: Prefetched data is expected to be read (not modified) but not reused extensively; it “streams” through cache. Action: Fetch data as if for a load and place it in the cache so that it does not displace data prefetched as “retained.”
5	store_streamed	Use: Prefetched data is expected to be stored or modified but not reused extensively; it “streams” through cache. Action: Fetch data as if for a store and place it in the cache so that it does not displace data prefetched as “retained.”
6	load_retained	Use: Prefetched data is expected to be read (not modified) and reused extensively; it should be “retained” in the cache. Action: Fetch data as if for a load and place it in the cache so that it is not displaced by data prefetched as “streamed.”
7	store_retained	Use: Prefetched data is expected to be stored or modified and reused extensively; it should be “retained” in the cache. Action: Fetch data as if for a store and place it in the cache so that it is not displaced by data prefetched as “streamed.”
8-20	Reserved	Reserved for future use - not available to implementations.
21-24	Implementation Dependent	Unassigned by the Architecture - available for implementation-dependent use.
25	writeback_invalidate (also known as “nudge”)	Use: Data is no longer expected to be used. Action: For a writeback cache, schedule a writeback of any dirty data. At the completion of the writeback, mark the state of any cache lines written back as invalid. If the cache line is not dirty, it is implementation dependent whether the state of the cache line is marked invalid or left unchanged. If the cache line is locked, no action is taken.
26-29	Implementation Dependent	Unassigned by the Architecture - available for implementation-dependent use.

Table 5.26 Values of *hint* Field for PREFE Instruction

30	PrepareForStore	Use: Prepare the cache for writing an entire line, without the overhead involved in filling the line from memory. Action: If the reference hits in the cache, no action is taken. If the reference misses in the cache, a line is selected for replacement, any valid and dirty victim is written back to memory, the entire line is filled with zero data, and the state of the line is marked as valid and dirty. Programming Note: Because the cache line is filled with zero data on a cache miss, software must not assume that this action, in and of itself, can be used as a fast bzero-type function.
31	Implementation Dependent	Unassigned by the Architecture - available for implementation-dependent use.

Restrictions:

Only usable when access to Coprocessor0 is enabled and when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```
vAddr ← GPR[base] + sign_extend(offset)
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
Prefetch(CCA, pAddr, vAddr, DATA, hint)
```

Exceptions:

Bus Error, Cache Error, Address Error, Reserved Instruction, Coprocessor Usable

Prefetch does not take any TLB-related or address-related exceptions under any circumstances.

Programming Notes:

Prefetch cannot move data to or from a mapped location unless the translation for that location is present in the TLB. Locations in memory pages that have not been accessed recently may not have translations in the TLB, so prefetch may not be effective for such locations.

Prefetch does not cause addressing exceptions. A prefetch may be used using an address pointer before the validity of the pointer is determined without worrying about an addressing exception.

It is implementation dependent whether a Bus Error or Cache Error exception is reported if such an error is detected as a byproduct of the action taken by the PREFE instruction. Typically, this only occurs in systems which have high-reliability requirements.

Prefetch operations have no effect on cache lines that were previously locked with the CACHE instruction.

Hint field encodings whose function is described as “streamed” or “retained” convey usage intent from software to hardware. Software should not assume that hardware will always prefetch data in an optimal way. If data is to be truly retained, software should use the Cache instruction to lock data into the cache.

31	26 25	21 20	16 15	11 10 9 8	5	0
POOL32F 010101	index	base	hint	00	PREFIX 110100000	

6 5 5 5 2 9

Format: PREFIX hint, index(base)

microMIPS
microMIPS

Purpose:

Prefetch Indexed

To move data between memory and cache.

Description: `prefetch_memory[GPR[base] + GPR[index]]`

PREFIX adds the contents of GPR *index* to the contents of GPR *base* to form an effective byte address. The *hint* field supplies information about the way the data is expected to be used.

The only functional difference between the PREF and PREFIX instructions is the addressing mode implemented by the two. Refer to the [PREF](#) instruction for all other details, including the encoding of the *hint* field.

Restrictions:

Operation:

```
vAddr ← GPR[base] + GPR[index]
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
Prefetch(CCA, pAddr, vAddr, DATA, hint)
```

Exceptions:

Coprocessor Unusable, Reserved Instruction, Bus Error, Cache Error

Programming Notes:

The PREFIX instruction is only available on processors that implement floating point and should never be generated by compilers in situations other than those in which the corresponding load and store indexed floating point instructions are generated.

Also refer to the corresponding section in the [PREF](#) instruction description.

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	ft	fs	fd	00	PUL.PS 100000000

6 5 5 5 2 9

Format: PUL.PS fd, fs, ft**microMIPS****Purpose:** Pair Upper Lower

To merge a pair of paired single values with realignment

Description: $FPR[fd] \leftarrow \text{upper}(FPR[fs]) \mid\mid \text{lower}(FPR[ft])$ A new paired-single value is formed by catenating the upper single of FPR *fs* (bits 63..32) and the lower single of FPR *ft* (bits 31..0).

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *PS*. If they are not valid, the result is **UNPREDICTABLE**.The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:** $\text{StoreFPR}(fd, PS, \text{ValueFPR}(fs, PS)_{63..32} \mid\mid \text{ValueFPR}(ft, PS)_{31..0})$ **Exceptions:**

Coprocessor Unusable, Reserved Instruction

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	ft	fs	fd	00	PUU.PS 101000000

6 5 5 5 2 9

Format: PUU.PS fd, fs, ft**microMIPS****Purpose:** Pair Upper Upper

To merge a pair of paired single values with realignment

Description: $FPR[fd] \leftarrow \text{upper}(FPR[fs]) \mid\mid \text{upper}(FPR[ft])$ A new paired-single value is formed by catenating the upper single of FPR *fs* (bits 63..32) and the upper single of FPR *ft* (bits 63..32).

The move is non-arithmetic; it causes no IEEE 754 exceptions.

Restrictions:The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *PS*. If they are not valid, the result is **UNPREDICTABLE**.The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.**Operation:** $\text{StoreFPR}(fd, PS, \text{ValueFPR}(fs, PS)_{63..32} \mid\mid \text{ValueFPR}(ft, PS)_{63..32})$ **Exceptions:**

Coprocessor Unusable, Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	RDHWR 0110101100	POOL32AXf 111100	6

Format: RDHWR rt,rs

microMIPS

Purpose: Read Hardware Register

To move the contents of a hardware register to a general purpose register (GPR) if that operation is enabled by privileged software.

The purpose of this instruction is to give user mode access to specific information that is otherwise only visible in kernel mode.

Description: GPR[rt] \leftarrow HWR[rs]

If access is allowed to the specified hardware register, the contents of the register specified by rs is sign-extended and loaded into general register rt. Access control for each register is selected by the bits in the coprocessor 0 HWREna register.

The available hardware registers, and the encoding of the rs field for each, are shown in [Table 5.27](#).

Table 5.27 RDHWR Register Numbers

Register Number (rd Value)	Mnemonic	Description										
0	CPUNum	Number of the CPU on which the program is currently running. This register provides read access to the coprocessor 0 EBase _{CPUNum} field.										
1	SYNCI_Step	Address step size to be used with the SYNCI instruction, or zero if no caches need be synchronized. See that instruction's description for the use of this value.										
2	CC	High-resolution cycle counter. This register provides read access to the coprocessor 0 Count Register.										
3	CCRes	Resolution of the CC register. This value denotes the number of cycles between update of the register. For example: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>CCRes Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>CC register increments every CPU cycle</td> </tr> <tr> <td>2</td> <td>CC register increments every second CPU cycle</td> </tr> <tr> <td>3</td> <td>CC register increments every third CPU cycle</td> </tr> <tr> <td>etc.</td> <td></td> </tr> </tbody> </table>	CCRes Value	Meaning	1	CC register increments every CPU cycle	2	CC register increments every second CPU cycle	3	CC register increments every third CPU cycle	etc.	
CCRes Value	Meaning											
1	CC register increments every CPU cycle											
2	CC register increments every second CPU cycle											
3	CC register increments every third CPU cycle											
etc.												
4-28		These registers numbers are reserved for future architecture use. Access results in a Reserved Instruction Exception.										
29	ULR	User Local Register. This register provides read access to the coprocessor 0 UserLocal register, if it is implemented. In some operating environments, the UserLocal register is a pointer to a thread-specific storage block.										

Table 5.27 RDHWR Register Numbers

Register Number (rd Value)	Mnemonic	Description
30-31		These register numbers are reserved for implementation-dependent use. If they are not implemented, access results in a Reserved Instruction Exception.

Restrictions:

In implementations of Release 1 of the Architecture, this instruction resulted in a Reserved Instruction Exception.

Access to the specified hardware register is enabled if Coprocessor 0 is enabled, or if the corresponding bit is set in the *HWEEna* register. If access is not allowed or the register is not implemented, a Reserved Instruction Exception is signaled.

Operation:

```

case rs
    0: temp ← sign_extend(EBaseCPUNum)
    1: temp ← sign_extend(SYNCI_StepSize())
    2: temp ← sign_extend(Count)
    3: temp ← sign_extend(CountResolution())
    29: temp ← sign_extend_if_32bit_op(UserLocal)
    30: temp ← sign_extend_if_32bit_op(Implementation-Dependent-Value)
    31: temp ← sign_extend_if_32bit_op(Implementation-Dependent-Value)
        otherwise: SignalException(ReservedInstruction)
endcase
GPR[rt] ← temp

function sign_extend_if_32bit_op(value)
    if (width(value) = 64) and Are64bitOperationsEnabled() then
        sign_extend_if_32bit_op ← value
    else
        sign_extend_if_32bit_op ← sign_extend(value)
    endif
end sign_extend_if_32bit_op

```

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	RDPGPR 1110000101	POOL32AXf 111100	6

Format: RDPGPR rt, rs**microMIPS****Purpose:** Read GPR from Previous Shadow Set

To move the contents of a GPR from the previous shadow set to a current GPR.

Description: $GPR[rt] \leftarrow SGPR[SRSCTL_{PSS}, rs]$ The contents of the shadow GPR register specified by $SRSCTL_{PSS}$ (signifying the previous shadow set number) and rs (specifying the register number within that set) is moved to the current GPR rt .**Restrictions:**

In implementations prior to Release 2 of the Architecture, this instruction resulted in a Reserved Instruction Exception.

Operation: $GPR[rt] \leftarrow SGPR[SRSCTL_{PSS}, rs]$ **Exceptions:**

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	RECIP 01001000	POOL32FXf 111011

6 5 5 1 1 8 6

Format: RECIP.fmtRECIP.S ft, fs
RECIP.D ft, fsmicroMIPS
microMIPS**Purpose:** Reciprocal Approximation

To approximate the reciprocal of an FP value (quickly)

Description: $FPR[ft] \leftarrow 1.0 / FPR[fs]$ The reciprocal of the value in $FPR[fs]$ is approximated and placed into $FPR[ft]$. The operand and result are values in format *fmt*.

The numeric accuracy of this operation is implementation dependent; it does not meet the accuracy specified by the IEEE 754 Floating Point standard. The computed result differs from the both the exact result and the IEEE-mandated representation of the exact result by no more than one unit in the least-significant place (ULP).

It is implementation dependent whether the result is affected by the current rounding mode in *FCSR*.**Restrictions:**The fields *fs* and *ft* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.**Operation:**

StoreFPR(ft, fmt, 1.0 / valueFPR(fs, fmt))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Division-by-zero, Unimplemented Op, Invalid Op, Overflow, Underflow

31	26 25	21 20	16 15	11 10	6 5	0
POOL32A 000000	rt	rs	sa	0	ROTR 0011000000	10

Format: ROTR rt, rs, sa

SmartMIPS Crypto, microMIPS

Purpose: Rotate Word Right

To execute a logical right-rotate of a word by a fixed number of bits

Description: $GPR[rt] \leftarrow GPR[rs] \leftrightarrow_{(right)} sa$

The contents of the low-order 32-bit word of GPR *rs* are rotated right; the word result is sign-extended and placed in GPR *rt*. The bit-rotate amount is specified by *sa*.

Restrictions:

If GPR *rt* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[rt]) or
    ((ArchitectureRevision() < 2) and (Config3SM = 0)) then
    UNPREDICTABLE
endif
s ← sa
temp ← GPR[rs]s-1..0 || GPR[rs]31..s
GPR[rt] ← sign_extend(temp)

```

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	ROTRV 0011010000

6 5 5 5 1 10

Format: ROTRV rd, rt, rs**SmartMIPS Crypto, microMIPS****Purpose:** Rotate Word Right Variable

To execute a logical right-rotate of a word by a variable number of bits

Description: $GPR[rd] \leftarrow GPR[rt] \leftrightarrow_{\text{(right)}} GPR[rs]$ The contents of the low-order 32-bit word of GPR *rt* are rotated right; the word result is sign-extended and placed in GPR *rd*. The bit-rotate amount is specified by the low-order 5 bits of GPR *rs*.**Restrictions:**If GPR *rt* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rt]) or
    ((ArchitectureRevision() < 2) and (Config3SM = 0)) then
    UNPREDICTABLE
endif
s ← GPR[rs]4..0
temp ← GPR[rt]s-1..0 || GPR[rt]31..s
GPR[rd] ← sign_extend(temp)

```

Exceptions:

Reserved Instruction

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	ROUND.L 11001100	POOL32FXf 111011

Format: ROUND . L . fmt

ROUND . L . S ft, fs
ROUND . L . D ft, fs

microMIPS
microMIPS

Purpose: Floating Point Round to Long Fixed Point

To convert an FP value to 64-bit fixed point, rounding to nearest

Description: `FPR[ft] ← convert_and_round(FPR[fs])`

The value in FPR *fs*, in format *fmt*, is converted to a value in 64-bit long fixed point format and rounded to nearest/even (rounding mode 0). The result is placed in FPR *ft*.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{63} to $2^{63}-1$, the result cannot be represented correctly and an IEEE Invalid Operation condition exists. In this case the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation *Enable* bit is set in the *FCSR*, no result is written to *ft* and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{63}-1$, is written to *ft*.

Restrictions:

The fields *fs* and *ft* must specify valid FPRs; *fs* for type *fmt* and *fd* for long fixed point; if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

`StoreFPR(ft, L, ConvertFmt(ValueFPR(fs, fmt), fmt, L))`

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Unimplemented Operation, Invalid Operation

31	26 25	22 21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	ROUND.W 11101100	POOL32FXf 111011

Format: ROUND.W(fmt)ROUND.W.S ft, fs
ROUND.W.D ft, fsmicroMIPS
microMIPS**Purpose:** Floating Point Round to Word Fixed Point

To convert an FP value to 32-bit fixed point, rounding to nearest

Description: FPR[ft] \leftarrow convert_and_round(FPR[fs])

The value in FPR fs, in format fmt, is converted to a value in 32-bit word fixed point format rounding to nearest/even (rounding mode 0). The result is placed in FPR ft.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{31} to $2^{31}-1$, the result cannot be represented correctly and an IEEE Invalid Operation condition exists. In this case the Invalid Operation flag is set in the FCSR. If the Invalid Operation Enable bit is set in the FCSR, no result is written to ft and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{31}-1$, is written to ft.**Restrictions:**The fields fs and ft must specify valid FPRs; fs for type fmt and fd for word fixed point; if they are not valid, the result is **UNPREDICTABLE**.The operand must be a value in format fmt; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.**Operation:**

StoreFPR(ft, W, ConvertFmt(ValueFPR(fs, fmt), fmt, W))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Unimplemented Operation, Invalid Operation

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	RSQRT(fmt 00001000)	POOL32FXf 111011

6 5 5 1 1 8 6

Format: RSQRT(fmt
RSQRT.S ft, fs
RSQRT.D ft, fs)

microMIPS
microMIPS

Purpose:

Reciprocal Square Root Approximation

To approximate the reciprocal of the square root of an FP value (quickly)

Description: $FPR[ft] \leftarrow 1.0 / \sqrt{FPR[fs]}$

The reciprocal of the positive square root of the value in $FPR[fs]$ is approximated and placed into $FPR[ft]$. The operand and result are values in format *fmt*.

The numeric accuracy of this operation is implementation dependent; it does not meet the accuracy specified by the IEEE 754 Floating Point standard. The computed result differs from both the exact result and the IEEE-mandated representation of the exact result by no more than two units in the least-significant place (ULP).

The effect of the current FCSR rounding mode on the result is implementation dependent.

Restrictions:

The fields *fs* and *ft* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

Operation:

```
StoreFPR(ft, fmt, 1.0 / SquareRoot(valueFPR(fs, fmt)))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Division-by-zero, Unimplemented Operation, Invalid Operation, Overflow, Underflow

31	26 25	21 20	16 15	0
SB32 000110	rt	base	offset	

6 5 5 16

Format: SB rt, offset(base)**microMIPS****Purpose:** Store Byte

To store a byte to memory

Description: $\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rt]$ The least-significant 8-bit byte of GPR *rt* is stored in memory at the location specified by the effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.**Restrictions:**

None

Operation:


```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
bytesel ← vAddr2..0 xor BigEndianCPU3
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, BYTE, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Watch

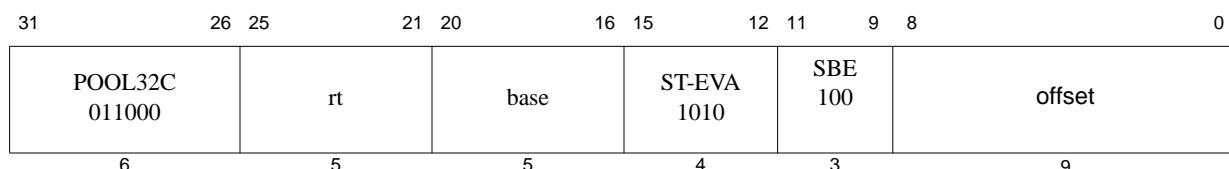

Format: SBE rt, offset(base)

microMIPS

Purpose: Store Byte EVA

To store a byte to user mode virtual address space when executing in kernel mode.

Description: memory[GPR[base] + offset] \leftarrow GPR[rt]

The least-significant 8-bit byte of GPR *rt* is stored in memory at the location specified by the effective address. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The SBE instruction functions in exactly the same fashion as the SB instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the *Config5_{EVA}* field being set to one.

Restrictions:

Only usable when access to Coprocessor0 is enabled and when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
(pAddr, CCA)  $\leftarrow$  AddressTranslation (vAddr, DATA, STORE)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
bytesel  $\leftarrow$  vAddr2..0 xor BigEndianCPU3
datadoubleword  $\leftarrow$  GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, BYTE, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	SC 1011	offset	

6 5 5 5 12

Format: SC rt, offset(base)

microMIPS

Purpose: Store Conditional Word

To store a word to memory to complete an atomic read-modify-write

Description: if atomic_update then memory[GPR[base] + offset] \leftarrow GPR[rt], GPR[rt] \leftarrow 1
else GPR[rt] \leftarrow 0

The LL and SC instructions provide primitives to implement atomic read-modify-write (RMW) operations for synchronizable memory locations.

The least-significant 32-bit word in GPR *rt* is conditionally stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form an effective address.

The SC completes the RMW sequence begun by the preceding LL instruction executed on the processor. To complete the RMW sequence atomically, the following occur:

- The least-significant 32-bit word of GPR *rt* is stored into memory at the location specified by the aligned effective address.
- A 1, indicating success, is written into GPR *rt*.

Otherwise, memory is not modified and a 0, indicating failure, is written into GPR *rt*.

If either of the following events occurs between the execution of LL and SC, the SC fails:

- A coherent store is completed by another processor or coherent I/O module into the block of synchronizable physical memory containing the word. The size and alignment of the block is implementation dependent, but it is at least one word and at most the minimum page size.
- An ERET instruction is executed.

If either of the following events occurs between the execution of LL and SC, the SC may succeed or it may fail; the success or failure is not predictable. Portable programs should not cause one of these events.

- A memory access instruction (load, store, or prefetch) is executed on the processor executing the LL/SC.
- The instructions executed starting with the LL and ending with the SC do not lie in a 2048-byte contiguous region of virtual memory. (The region does not have to be aligned, other than the alignment required for instruction words.)

The following conditions must be true or the result of the SC is **UNPREDICTABLE**:

- Execution of SC must have been preceded by execution of an LL instruction.
- An RMW sequence executed without intervening events that would cause the SC to fail must use the same address in the LL and SC. The address is the same if the virtual address, physical address, and cacheability & coherency attribute are identical.

Atomic RMW is provided only for synchronizable memory locations. A synchronizable memory location is one that is associated with the state and logic necessary to implement the LL/SC semantics. Whether a memory location is

synchronizable depends on the processor and system configurations, and on the memory access type used for the location:

- **Uniprocessor atomicity:** To provide atomic RMW on a single processor, all accesses to the location must be made with memory access type of either *cached noncoherent* or *cached coherent*. All accesses must be to one or the other access type, and they may not be mixed.
- **MP atomicity:** To provide atomic RMW among multiple processors, all accesses to the location must be made with a memory access type of *cached coherent*.
- **I/O System:** To provide atomic RMW with a coherent I/O system, all accesses to the location must be made with a memory access type of *cached coherent*. If the I/O system does not use coherent memory operations, then atomic RMW cannot be provided with respect to the I/O reads and writes.

Restrictions:

The addressed location must have a memory access type of *cached noncoherent* or *cached coherent*; if it does not, the result is **UNPREDICTABLE**.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
if LLbit then
    StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
endif
GPR[rt] ← 063 || LLbit

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

Programming Notes:

LL and SC are used to atomically update memory locations, as shown below.

```

L1:
    LL      T1, (T0)  # load counter
    ADDI   T2, T1, 1 # increment
    SC      T2, (T0)  # try to store, checking for atomicity
    BEQ    T2, 0, L1 # if not atomic (0), try again
    NOP          # branch-delay slot

```

Exceptions between the LL and SC cause SC to fail, so persistent exceptions must be avoided. Some examples of these are arithmetic operations that trap, system calls, and floating point operations that trap or require software emulation assistance.

LL and SC function on a single processor for *cached noncoherent* memory so that parallel programs can be run on uniprocessor systems that do not support *cached coherent* memory access types.

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	ST-EVA 1010	SCE 110	offset	

6 5 5 4 3 9

Format: SCE rt, offset(base)

microMIPS

Purpose: Store Conditional Word EVA

To store a word to user mode virtual memory while operating in kernel mode to complete an atomic read-modify-write

Description: if atomic_update then memory[GPR[base] + offset] \leftarrow GPR[rt], GPR[rt] \leftarrow 1
else GPR[rt] \leftarrow 0

The LL and SC instructions provide primitives to implement atomic read-modify-write (RMW) operations for synchronizable memory locations.

The least-significant 32-bit word in GPR *rt* is conditionally stored in memory at the location specified by the aligned effective address. The 9-bit signed *offset* is added to the contents of GPR *base* to form an effective address.

The SCE completes the RMW sequence begun by the preceding LLE instruction executed on the processor. To complete the RMW sequence atomically, the following occur:

- The least-significant 32-bit word of GPR *rt* is stored into memory at the location specified by the aligned effective address.
- A 1, indicating success, is written into GPR *rt*.

Otherwise, memory is not modified and a 0, indicating failure, is written into GPR *rt*.

If either of the following events occurs between the execution of LL and SC, the SC fails:

- A coherent store is completed by another processor or coherent I/O module into the block of synchronizable physical memory containing the word. The size and alignment of the block is implementation dependent, but it is at least one word and at most the minimum page size.
- An ERET instruction is executed.

If either of the following events occurs between the execution of LLE and SCE, the SCE may succeed or it may fail; the success or failure is not predictable. Portable programs should not cause one of these events.

- A memory access instruction (load, store, or prefetch) is executed on the processor executing the LLE/SCE.
- The instructions executed starting with the LLE and ending with the SCE do not lie in a 2048-byte contiguous region of virtual memory. (The region does not have to be aligned, other than the alignment required for instruction words.)

The following conditions must be true or the result of the SCE is **UNPREDICTABLE**:

- Execution of SCE must have been preceded by execution of an LLE instruction.
- An RMW sequence executed without intervening events that would cause the SCE to fail must use the same address in the LLE and SCE. The address is the same if the virtual address, physical address, and cacheability & coherency attribute are identical.

Atomic RMW is provided only for synchronizable memory locations. A synchronizable memory location is one that

is associated with the state and logic necessary to implement the LLE/SCE semantics. Whether a memory location is synchronizable depends on the processor and system configurations, and on the memory access type used for the location:

- **Uniprocessor atomicity:** To provide atomic RMW on a single processor, all accesses to the location must be made with memory access type of either *cached noncoherent* or *cached coherent*. All accesses must be to one or the other access type, and they may not be mixed.
- **MP atomicity:** To provide atomic RMW among multiple processors, all accesses to the location must be made with a memory access type of *cached coherent*.
- **I/O System:** To provide atomic RMW with a coherent I/O system, all accesses to the location must be made with a memory access type of *cached coherent*. If the I/O system does not use coherent memory operations, then atomic RMW cannot be provided with respect to the I/O reads and writes.

The SCE instruction functions in exactly the same fashion as the SC instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the *Config5_{EVA}* field being set to one.

Restrictions:

The addressed location must have a memory access type of *cached noncoherent* or *cached coherent*; if it does not, the result is **UNPREDICTABLE**.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
if LLbit then
    StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
endif
GPR[rt] ← 063 || LLbit
```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch, Reserved Instruction, Coprocessor Unusable

Programming Notes:

LLE and SCE are used to atomically update memory locations, as shown below.

```
L1:
    LLE    T1, (T0)  # load counter
    ADDI   T2, T1, 1 # increment
    SCE    T2, (T0)  # try to store, checking for atomicity
```

```
BEQ    T2, 0, L1 # if not atomic (0), try again  
NOP          # branch-delay slot
```

Exceptions between the LLE and SCE cause SCE to fail, so persistent exceptions must be avoided. Some examples of these are arithmetic operations that trap, system calls, and floating point operations that trap or require software emulation assistance.

LLE and SCE function on a single processor for *cached noncoherent* memory so that parallel programs can be run on uniprocessor systems that do not support *cached coherent* memory access types.

31	26 25	21 20	16 15	12 11	6 5	0
POOL32C 011000	rt	base	SCD 1111		offset	

6 5 5 4 12

Format: SCD rt, offset(base)

microMIPS

Purpose: Store Conditional Doubleword

To store a doubleword to memory to complete an atomic read-modify-write

Description: if atomic_update then memory[GPR[base] + offset] \leftarrow GPR[rt], GPR[rt] \leftarrow 1
else GPR[rt] \leftarrow 0

The LLD and SCD instructions provide primitives to implement atomic read-modify-write (RMW) operations for synchronizable memory locations.

The 64-bit doubleword in GPR *rt* is conditionally stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form an effective address.

The SCD completes the RMW sequence begun by the preceding LLD instruction executed on the processor. If it would complete the RMW sequence atomically, the following occur:

- The 64-bit doubleword of GPR *rt* is stored into memory at the location specified by the aligned effective address.
- A 1, indicating success, is written into GPR *rt*.

Otherwise, memory is not modified and a 0, indicating failure, is written into GPR *rt*.

If either of the following events occurs between the execution of LLD and SCD, the SCD fails:

- A coherent store is completed by another processor or coherent I/O module into the block of synchronizable physical memory containing the doubleword. The size and alignment of the block is implementation dependent, but it is at least one doubleword and at most the minimum page size.
- An ERET instruction is executed.

If either of the following events occurs between the execution of LLD and SCD, the SCD may succeed or it may fail; success or failure is not predictable. Portable programs should not cause these events:

- A memory access instruction (load, store, or prefetch) is executed on the processor executing the LLD/SCD.
- The instructions executed starting with the LLD and ending with the SCD do not lie in a 2048-byte contiguous region of virtual memory. (The region does not have to be aligned, other than the alignment required for instruction words.)

The following two conditions must be true or the result of the SCD is **UNPREDICTABLE**:

- Execution of the SCD must be preceded by execution of an LLD instruction.
- An RMW sequence executed without intervening events that would cause the SCD to fail must use the same address in the LLD and SCD. The address is the same if the virtual address, physical address, and cache-coherence algorithm are identical.

Atomic RMW is provided only for synchronizable memory locations. A synchronizable memory location is one that is associated with the state and logic necessary to implement the LL/SC semantics. Whether a memory location is synchronizable depends on the processor and system configurations, and on the memory access type used for the

location:

- **Uniprocessor atomicity:** To provide atomic RMW on a single processor, all accesses to the location must be made with memory access type of either *cached noncoherent* or *cached coherent*. All accesses must be to one or the other access type, and they may not be mixed.
- **MP atomicity:** To provide atomic RMW among multiple processors, all accesses to the location must be made with a memory access type of *cached coherent*.
- **I/O System:** To provide atomic RMW with a coherent I/O system, all accesses to the location must be made with a memory access type of *cached coherent*. If the I/O system does not use coherent memory operations, then atomic RMW cannot be provided with respect to the I/O reads and writes.

Restrictions:

The addressed location must have a memory access type of *cached noncoherent* or *cached coherent*; if it does not, the result is **UNPREDICTABLE**.

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
datadoubleword ← GPR[rt]
if LLbit then
    StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)
endif
GPR[rt] ← 063 || LLbit
```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Reserved Instruction, Watch

Programming Notes:

LLD and SCD are used to atomically update memory locations, as shown below.

```
L1:
    LLD    T1, (T0)  # load counter
    ADDI   T2, T1, 1 # increment
    SCD    T2, (T0)  # try to store,
            # checking for atomicity
    BEQ    T2, 0, L1 # if not atomic (0), try again
    NOP
```

Exceptions between the LLD and SCD cause SCD to fail, so persistent exceptions must be avoided. Some examples of such exceptions are arithmetic operations that trap, system calls, and floating point operations that trap or require software emulation assistance.

LLD and SCD function on a single processor for *cached noncoherent* memory so that parallel programs can be run on uniprocessor systems that do not support *cached coherent* memory access types.

31	26 25	21 20	16 15	0
SD32 110110	rt	base	offset	

6 5 5 16

Format: SD rt, offset(base)**microMIPS64****Purpose:** Store Doubleword

To store a doubleword to memory

Description: memory[GPR[base] + offset] ← GPR[rt]The 64-bit doubleword in GPR *rt* is stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.**Restrictions:**

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the effective address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
datadoubleword ← GPR[rt]
StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Reserved Instruction, Watch

31	26 25	16 15	6 5	0
POOL32A 000000	code - use syscall	SDBBP 1101101101	POOL32AXf 111100	6

Format: SDBBP code**EJTAG microMIPS****Purpose:** Software Debug Breakpoint

To cause a debug breakpoint exception

Description:

This instruction causes a debug exception, passing control to the debug exception handler. If the processor is executing in Debug Mode when the SDBBP instruction is executed, the exception is a Debug Mode Exception, which sets the DebugDExcCode field to the value 0x9 (Bp). The code field can be used for passing information to the debug exception handler, and is retrieved by the debug exception handler only by loading the contents of the memory word containing the instruction, using the DEPC register. The CODE field is not used in any way by the hardware.

Restrictions:**Operation:**

```
If DebugDM = 0 then
    SignalDebugBreakpointException()
else
    SignalDebugModeBreakpointException()
endif
```

Exceptions:

Debug Breakpoint Exception

Debug Mode Breakpoint Exception

31	26 25	21 20	16 15	0
SDC132 101110	ft	base	offset	

6 5 5 16

Format: SDC1 ft, offset(base)**microMIPS****Purpose:** Store Doubleword from Floating Point

To store a doubleword from an FPR to memory

Description: $\text{memory}[\text{GPR}[\text{base}] + \text{offset}] \leftarrow \text{FPR}[\text{ft}]$ The 64-bit doubleword in FPR *ft* is stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.**Restrictions:**An Address Error exception occurs if EffectiveAddress_{2..0} ≠ 0 (not doubleword-aligned).**Operation:**

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
datadoubleword ← ValueFPR(ft, UNINTERPRETED_DOUBLEWORD)
StoreMemory(CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32B 110110	rt	base	SDC2 1010	offset	

6 5 5 4 12

Format: SDC2 rt, offset(base)

microMIPS

Purpose: Store Doubleword from Coprocessor 2

To store a doubleword from a Coprocessor 2 register to memory

Description: $\text{memory}[\text{GPR}[\text{base}] + \text{offset}] \leftarrow \text{CPR}[2, \text{rt}, 0]$

The 64-bit doubleword in Coprocessor 2 register *rt* is stored in memory at the location specified by the aligned effective address. The 12-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

An Address Error exception occurs if $\text{EffectiveAddress}_{2..0} \neq 0$ (not doubleword-aligned).

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
datadoubleword ← CPR[2, rt, 0]
StoreMemory(CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	12 11	6 5	0
POOL32C 011000	rt	base	SDL 1100		offset	

6 5 5 4 12

Format: SDL rt, offset(base)**microMIPS64****Purpose:** Store Doubleword Left


To store the most-significant part of a doubleword to an unaligned memory address

Description: `memory[GPR[base] + offset] ← Some_Bytes_From GPR[rt]`


The 16-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the most-significant of 8 consecutive bytes forming a doubleword (*DW*) in memory, starting at an arbitrary byte boundary.

A part of *DW*, the most-significant 1 to 8 bytes, is in the aligned doubleword containing *EffAddr*. The same number of most-significant (left) bytes of GPR *rt* are stored into these bytes of *DW*.

The figure below illustrates this operation for big-endian byte ordering. The 8 consecutive bytes in 2..9 form an unaligned doubleword starting at location 2. A part of *DW*, 6 bytes, is located in the aligned doubleword containing the most-significant byte at 2. First, SDL stores the 6 most-significant bytes of the source register into these bytes of *DW*. Next, the complementary SDR instruction stores the remainder of *DW*.

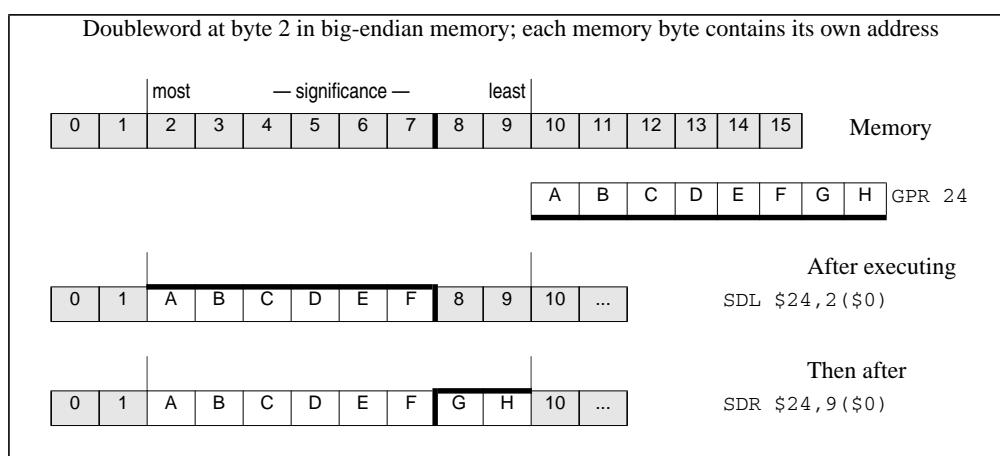Figure 5.24 Unaligned Doubleword Store With SDL and SDR

The bytes stored from the source register to memory depend on both the offset of the effective address within an aligned doubleword—that is, the low 3 bits of the address ($vAddr_{2..0}$)—and the current byte-ordering mode of the processor (big- or little-endian). The figure below shows the bytes stored for every combination of offset and byte ordering.

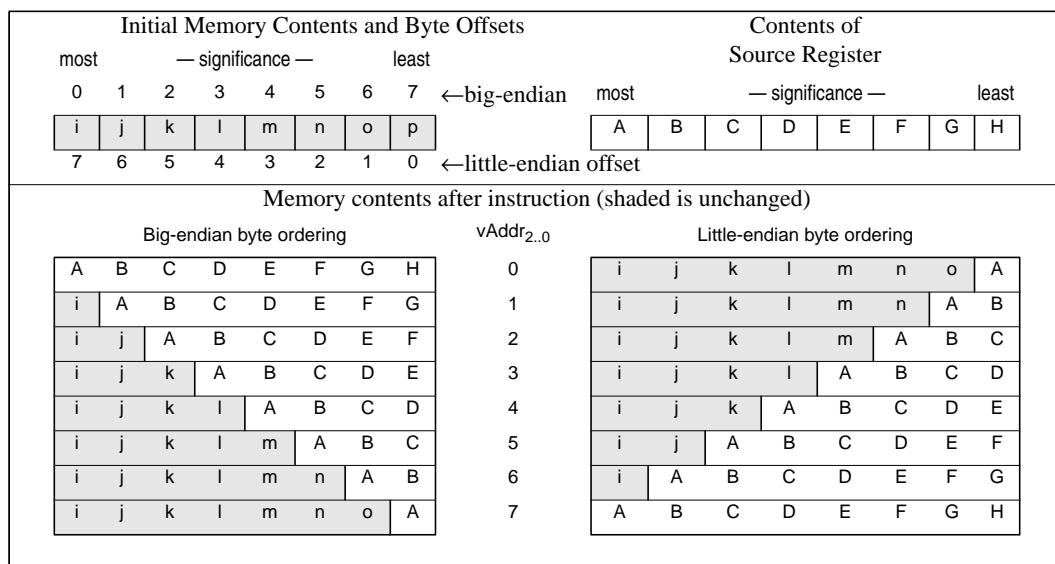Figure 5.25 Bytes Stored by an SDL Instruction**Restrictions:****Operation:**

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
If BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..3 || 03
endif
bytesel ← vAddr2..0 xor BigEndianCPU3
datadoubleword ← 056-8*bytesel || GPR[rt]63..56-8*bytesel
StoreMemory (CCA, byte, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Reserved Instruction, Watch

31	26 25	21 20	16 15	12 11	6 5	0
POOL32C 011000	rt	base	SDL 1101		offset	

6 5 5 4 12

Format: SDR rt, offset(base)**microMIPS64****Purpose:** Store Doubleword Right


To store the least-significant part of a doubleword to an unaligned memory address

Description: `memory[GPR[base] + offset] ← Some_Bytes_From GPR[rt]`

The 16-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the least-significant of 8 consecutive bytes forming a doubleword (*DW*) in memory, starting at an arbitrary byte boundary.

A part of *DW*, the least-significant 1 to 8 bytes, is in the aligned doubleword containing *EffAddr*. The same number of least-significant (right) bytes of GPR *rt* are stored into these bytes of *DW*.

[Figure 3-25](#) illustrates this operation for big-endian byte ordering. The 8 consecutive bytes in 2..9 form an unaligned doubleword starting at location 2. A part of *DW*, 2 bytes, is located in the aligned doubleword containing the least-significant byte at 9. First, SDR stores the 2 least-significant bytes of the source register into these bytes of *DW*. Next, the complementary SDL stores the remainder of *DW*.

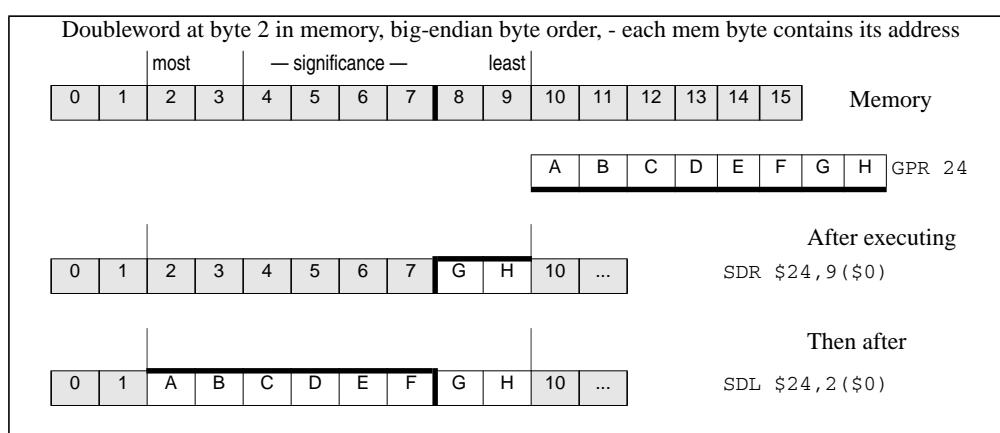Figure 5.26 Unaligned Doubleword Store With SDR and SDL

The bytes stored from the source register to memory depend on both the offset of the effective address within an aligned doubleword—that is, the low 3 bits of the address ($vAddr_{2..0}$)—and the current byte ordering mode of the processor (big- or little-endian). [Figure 3-26](#) shows the bytes stored for every combination of offset and byte-ordering.

Figure 5.27 Bytes Stored by an SDR Instruction

Initial Memory contents and byte offsets								Contents of Source Register									
most	— significance —							least	most	— significance —							
0	1	2	3	4	5	6	7	←big-endian	←little-endian offset	A	B	C	D	E	F	G	H
i	j	k	l	m	n	o	p										
7	6	5	4	3	2	1	0										
Memory contents after instruction (shaded is unchanged)																	
Big-endian byte ordering								vAddr _{2..0}	Little-endian byte ordering								
H	j	k	l	m	n	o	p	0	A	B	C	D	E	F	G	H	
G	H	k	l	m	n	o	p	1	B	C	D	E	F	G	H	p	
F	G	H	I	m	n	o	p	2	C	D	E	F	G	H	I	o	p
E	F	G	H	m	n	o	p	3	D	E	F	G	H	I	n	o	p
D	E	F	G	H	n	o	p	4	E	F	G	H	I	m	n	o	p
C	D	E	F	G	H	o	p	5	F	G	H	I	m	n	o	p	
B	C	D	E	F	G	H	p	6	G	H	I	k	l	m	n	o	p
A	B	C	D	E	F	G	H	7	H	J	K	L	M	N	O	P	

Restrictions:**Operation:**

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
If BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..3 || 03
endif
bytesel ← vAddr1..0 xor BigEndianCPU3
datadoubleword ← GPR[rt]63-8*bytesel || 08*bytesel
StoreMemory (CCA, DOUBLEWORD-byte, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Reserved Instruction, Watch

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	index	base	fd	00	SDXC1 100001000

6 5 5 5 2 9

Format: SDXC1 fd, index(base)

microMIPS
microMIPS

Purpose: Store Doubleword Indexed from Floating Point

To store a doubleword from an FPR to memory (GPR+GPR addressing)

Description: memory[GPR[base] + GPR[index]] \leftarrow FPR[fd]

The 64-bit doubleword in FPR *fd* is stored in memory at the location specified by the aligned effective address. The contents of GPR *index* and GPR *base* are added to form the effective address.

Restrictions:

An Address Error exception occurs if EffectiveAddress_{2..0} \neq 0 (not doubleword-aligned).

Operation:

```
vAddr  $\leftarrow$  GPR[base] + GPR[index]
if vAddr2..0  $\neq$  03 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation(vAddr, DATA, STORE)
datadoubleword  $\leftarrow$  ValueFPR(fd, UNINTERPRETED_DOUBLEWORD)
StoreMemory(CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)
```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Coprocessor Unusable, Address Error, Reserved Instruction, Watch.

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	SEB 0010101100	POOL32AXf 111100	6

Format: SEB rt, rs**microMIPS****Purpose:** Sign-Extend Byte

To sign-extend the least significant byte of GPR *rs* and store the value into GPR *rt*.

Description: $\text{GPR}[\text{rt}] \leftarrow \text{SignExtend}(\text{GPR}[\text{rs}]_{7..0})$

The least significant byte from GPR *rs* is sign-extended and stored in GPR *rt*.

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

If GPR *rs* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```
if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
GPR[rt] ← sign_extend(GPR[rs]7..0)
```

Exceptions:

Reserved Instruction

Programming Notes:

For symmetry with the SEB and SEH instructions, one would expect that there would be ZEB and ZEH instructions that zero-extend the source operand. Similarly, one would expect that the SEW and ZEW instructions would exist to sign- or zero-extend a word to a doubleword. These instructions do not exist because there are functionally-equivalent instructions already in the instruction set. The following table shows the instructions providing the equivalent functions.

Expected Instruction	Function	Equivalent Instruction
ZEB rx,ry	Zero-Extend Byte	ANDI rx,ry,0xFF
ZEH rx,ry	Zero-Extend Halfword	ANDI rx,ry,0xFFFF
SEW rx,ry	Sign-Extend Word	SLL rx,ry,0
ZEW rx,rx ¹	Zero-Extend Word	DINSP32 rx,r0,32,32

1. The equivalent instruction uses rx for both source and destination, so the expected instruction is limited to one register

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	SEH 0011101100	POOL32AXf 111100	6

Format: SEH rt, rs

microMIPS

Purpose: Sign-Extend Halfword

To sign-extend the least significant halfword of GPR rs and store the value into GPR rt.

Description: $GPR[rt] \leftarrow \text{SignExtend}(GPR[rs]_{15..0})$

The least significant halfword from GPR rs is sign-extended and stored in GPR rt.

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

If GPR rs does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
GPR[rt] ← sign_extend(GPR[rs]15..0)

```

Exceptions:

Reserved Instruction

Programming Notes:

The SEH instruction can be used to convert two contiguous halfwords to sign-extended word values in three instructions. For example:

```

lw      t0, 0(a1)          /* Read two contiguous halfwords */
seh     t1, t0              /* t1 = lower halfword sign-extended to word */
sra     t0, t0, 16           /* t0 = upper halfword sign-extended to word */

```

Zero-extended halfwords can be created by changing the SEH and SRA instructions to ANDI and SRL instructions, respectively.

For symmetry with the SEB and SEH instructions, one would expect that there would be ZEB and ZEH instructions that zero-extend the source operand. Similarly, one would expect that the SEW and ZEW instructions would exist to sign- or zero-extend a word to a doubleword. These instructions do not exist because there are functionally-equivalent instructions already in the instruction set. The following table shows the instructions providing the equivalent functions.

Expected Instruction	Function	Equivalent Instruction
ZEB rx, ry	Zero-Extend Byte	ANDI rx, ry, 0xFF
ZEH rx, ry	Zero-Extend Halfword	ANDI rx, ry, 0xFFFF
SEW rx, ry	Sign-Extend Word	SLL rx, ry, 0
ZEW rx, rx ¹	Zero-Extend Word	DINSP32 rx, r0, 32, 32

1. The equivalent instruction uses rx for both source and destination, so the expected instruction is limited to one register

31	26 25	21 20	16 15	0
SH32 001110 6	rt 5	base 5	offset 16	

Format: SH rt, offset(base)

microMIPS

Purpose: Store Halfword

To store a halfword to memory

Description: memory[GPR[base] + offset] \leftarrow GPR[rt]

The least-significant 16-bit halfword of register *rt* is stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr0  $\neq$  0 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation(vAddr, DATA, STORE)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
bytesel  $\leftarrow$  vAddr2..0 xor (BigEndianCPU2 || 0)
datadoubleword  $\leftarrow$  GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, HALFWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	ST-EVA 1010	SHE 101	offset	

6 5 5 4 3 9

Format: SHE rt, offset(base)**microMIPS****Purpose:** Store Halfword EVA

To store a halfword to user mode virtual address space when executing in kernel mode.

Description: memory[GPR[base] + offset] ← GPR[rt]The least-significant 16-bit halfword of register *rt* is stored in memory at the location specified by the aligned effective address. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The SHE instruction functions in exactly the same fashion as the SH instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the *Config5_{EVA}* field being set to one.**Restrictions:**

Only usable in kernel mode when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
bytesel ← vAddr2..0 xor (BigEndianCPU2 || 0)
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, HALFWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	sa	0	SLL32 0000000000

6 5 5 5 1 10

Format: SLL rt, rs, sa

microMIPS

Purpose: Shift Word Left Logical

To left-shift a word by a fixed number of bits

Description: GPR[rt] \leftarrow GPR[rs] \ll sa

The contents of the low-order 32-bit word of GPR rs are shifted left, inserting zeros into the emptied bits; the word result is sign-extended and placed in GPR rt. The bit-shift amount is specified by sa.

Restrictions:

None

Operation:

```

s  $\leftarrow$  sa
temp  $\leftarrow$  GPR[rs](31-s)... || 0s
GPR[rt]  $\leftarrow$  sign_extend(temp)

```

Exceptions:

None

Programming Notes:

Unlike nearly all other word operations, the SLL input operand does not have to be a properly sign-extended word value to produce a valid sign-extended 32-bit result. The result word is always sign-extended into a 64-bit destination register; this instruction with a zero shift amount truncates a 64-bit value to 32 bits and sign-extends it.

SLL r0, r0, 0, expressed as NOP, is the assembly idiom used to denote no operation.

SLL r0, r0, 1, expressed as SSNOP, is the assembly idiom used to denote no operation that causes an issue break on superscalar processors.

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	SLLV 00000010000

Format: SLLV rd, rt, rs**microMIPS****Purpose:** Shift Word Left Logical Variable

To left-shift a word by a variable number of bits

Description: GPR[rd] \leftarrow GPR[rt] $<<$ rs

The contents of the low-order 32-bit word of GPR *rt* are shifted left, inserting zeros into the emptied bits; the result word is sign-extended and placed in GPR *rd*. The bit-shift amount is specified by the low-order 5 bits of GPR *rs*.

Restrictions:

None

Operation:

```
s ← GPR[rs]4..0
temp ← GPR[rt]_{(31-s)..0} || 0^s
GPR[rd] ← sign_extend(temp)
```

Exceptions:

None

Programming Notes:

Unlike nearly all other word operations, the input operand does not have to be a properly sign-extended word value to produce a valid sign-extended 32-bit result. The result word is always sign-extended into a 64-bit destination register; this instruction with a zero shift amount truncates a 64-bit value to 32 bits and sign-extends it.

31	26 25	21 20	16 15	11 10	0
POOL32A 000000	rt	rs	rd	0	SLT 1101010000

6 5 5 5 1 10

Format: SLT rd, rs, rt**microMIPS****Purpose:** Set on Less Than

To record the result of a less-than comparison

Description: $GPR[rd] \leftarrow (GPR[rs] < GPR[rt])$ Compare the contents of GPR *rs* and GPR *rt* as signed integers and record the Boolean result of the comparison in GPR *rd*. If GPR *rs* is less than GPR *rt*, the result is 1 (true); otherwise, it is 0 (false).

The arithmetic comparison does not cause an Integer Overflow exception.

Restrictions:

None

Operation:

```

if GPR[rs] < GPR[rt] then
    GPR[rd] ← 0GPRLEN-1 || 1
else
    GPR[rd] ← 0GPRLEN
endif

```

Exceptions:

None

31	26 25	21 20	16 15	0
SLTI32 100100	rt	rs	immediate	

6 5 5 16

Format: SLTI rt, rs, immediate**microMIPS****Purpose:** Set on Less Than Immediate

To record the result of a less-than comparison with a constant

Description: $GPR[rt] \leftarrow (GPR[rs] < \text{immediate})$ Compare the contents of GPR *rs* and the 16-bit signed *immediate* as signed integers and record the Boolean result of the comparison in GPR *rt*. If GPR *rs* is less than *immediate*, the result is 1 (true); otherwise, it is 0 (false).

The arithmetic comparison does not cause an Integer Overflow exception.

Restrictions:

None

Operation:

```

if GPR[rs] < sign_extend(immediate) then
    GPR[rt] ← 0GPRLEN-1 || 1
else
    GPR[rt] ← 0GPRLEN
endif

```

Exceptions:

None

31	26 25	21 20	16 15	0
SLTIU32 101100	rt	rs	immediate	

6 5 5 16

Format: SLTIU rt, rs, immediate

microMIPS

Purpose: Set on Less Than Immediate Unsigned

To record the result of an unsigned less-than comparison with a constant

Description: $GPR[rt] \leftarrow (GPR[rs] < \text{immediate})$ Compare the contents of GPR *rs* and the sign-extended 16-bit *immediate* as unsigned integers and record the Boolean result of the comparison in GPR *rt*. If GPR *rs* is less than *immediate*, the result is 1 (true); otherwise, it is 0 (false).Because the 16-bit *immediate* is sign-extended before comparison, the instruction can represent the smallest or largest unsigned numbers. The representable values are at the minimum [0, 32767] or maximum [max_unsigned-32767, max_unsigned] end of the unsigned range.

The arithmetic comparison does not cause an Integer Overflow exception.

Restrictions:

None

Operation:

```

if (0 || GPR[rs]) < (0 || sign_extend(immediate)) then
    GPR[rt] ← 0GPRLEN-1 || 1
else
    GPR[rt] ← 0GPRLEN
endif

```

Exceptions:

None

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	SLTU 1110010000

Format: SLTU rd, rs, rt**microMIPS****Purpose:** Set on Less Than Unsigned

To record the result of an unsigned less-than comparison

Description: $GPR[rd] \leftarrow (GPR[rs] < GPR[rt])$ Compare the contents of GPR *rs* and GPR *rt* as unsigned integers and record the Boolean result of the comparison in GPR *rd*. If GPR *rs* is less than GPR *rt*, the result is 1 (true); otherwise, it is 0 (false).

The arithmetic comparison does not cause an Integer Overflow exception.

Restrictions:

None

Operation:

```

if (0 || GPR[rs]) < (0 || GPR[rt]) then
    GPR[rd] ← 0GPRLEN-1 || 1
else
    GPR[rd] ← 0GPRLEN
endif

```

Exceptions:

None

31	26 25	21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	SQRT(fmt 00101000)	POOL32FXf 111011

Format: SQRT(fmt
SQRT.S ft, fs
SQRT.D ft, fs)

Purpose: Floating Point Square Root

To compute the square root of an FP value

Description: FPR[ft] \leftarrow SQRT(FPR[fs])

The square root of the value in FPR *fs* is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, and placed into FPR *ft*. The operand and result are values in format *fmt*.

If the value in FPR *fs* corresponds to –0, the result is –0.

Restrictions:

If the value in FPR *fs* is less than 0, an Invalid Operation condition is raised.

The fields *fs* and *ft* must specify FPRs valid for operands of type *fmt*; if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

Operation:

```
StoreFPR(ft, fmt, SquareRoot(ValueFPR(fs, fmt)))
```

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Invalid Operation, Inexact, Unimplemented Operation

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	sa	0	SRA 0010000000

Format: SRA rt, rs, sa

microMIPS

Purpose: Shift Word Right Arithmetic

To execute an arithmetic right-shift of a word by a fixed number of bits

Description: $GPR[rt] \leftarrow GPR[rs] \gg sa$ (arithmetic)The contents of the low-order 32-bit word of GPR *rs* are shifted right, duplicating the sign-bit (bit 31) in the emptied bits; the word result is sign-extended and placed in GPR *rt*. The bit-shift amount is specified by *sa*.**Restrictions:**On 64-bit processors, if GPR *rs* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
s ← sa
temp ← (GPR[rs]31)s || GPR[rs]31..s
GPR[rt] ← sign_extend(temp)

```

Exceptions:

None

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	SRAV 0010010000

6 5 5 5 1 10

Format: SRAV rd, rt, rs**microMIPS****Purpose:** Shift Word Right Arithmetic Variable

To execute an arithmetic right-shift of a word by a variable number of bits

Description: GPR[rd] \leftarrow GPR[rt] \gg rs (arithmetic)The contents of the low-order 32-bit word of GPR *rt* are shifted right, duplicating the sign-bit (bit 31) in the emptied bits; the word result is sign-extended and placed in GPR *rd*. The bit-shift amount is specified by the low-order 5 bits of GPR *rs*.**Restrictions:**On 64-bit processors, if GPR *rt* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
s ← GPR[rs]4..0
temp ← (GPR[rt]31)s || GPR[rt]31..s
GPR[rd] ← sign_extend(temp)

```

Exceptions:

None

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	sa	0	SRL32 0001000000

6 5 5 5 1 10

Format: SRL rt, rs, sa

microMIPS

Purpose: Shift Word Right Logical

To execute a logical right-shift of a word by a fixed number of bits

Description: GPR[rt] \leftarrow GPR[rs] \gg sa (logical)

The contents of the low-order 32-bit word of GPR rs are shifted right, inserting zeros into the emptied bits; the word result is sign-extended and placed in GPR rt. The bit-shift amount is specified by sa.

Restrictions:On 64-bit processors, if GPR rs does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rs]) then
    UNPREDICTABLE
endif
s  $\leftarrow$  sa
temp  $\leftarrow$  0s || GPR[rs]31..s
GPR[rt]  $\leftarrow$  sign_extend(temp)

```

Exceptions:

None

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	SRLV 00010010000

Format: SRLV rd, rt, rs**microMIPS****Purpose:** Shift Word Right Logical Variable

To execute a logical right-shift of a word by a variable number of bits

Description: $GPR[rd] \leftarrow GPR[rt] \gg GPR[rs]$ (logical)The contents of the low-order 32-bit word of GPR *rt* are shifted right, inserting zeros into the emptied bits; the word result is sign-extended and placed in GPR *rd*. The bit-shift amount is specified by the low-order 5 bits of GPR *rs*.**Restrictions:**On 64-bit processors, if GPR *rt* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
s ← GPR[rs]4..0
temp ← 0s || GPR[rt]31..s
GPR[rd] ← sign_extend(temp)

```

Exceptions:

None

31	26 25			11 10	6 5	0
POOL32A 000000	0 00000	0 00000	1 00001	0 0000	SLL32 000000	6

6 5 5 5 5 6

Format: SSNOP**microMIPS****Purpose:** Superscalar No Operation

Break superscalar issue on a superscalar processor.

Description:

SSNOP is the assembly idiom used to denote superscalar no operation. The actual instruction is interpreted by the hardware as SLL r0, r0, 1.

This instruction alters the instruction issue behavior on a superscalar processor by forcing the SSNOP instruction to single-issue. The processor must then end the current instruction issue between the instruction previous to the SSNOP and the SSNOP. The SSNOP then issues alone in the next issue slot.

On a single-issue processor, this instruction is a NOP that takes an issue slot.

Restrictions:

None

Operation:**None****Exceptions:**

None

Programming Notes:

SSNOP is intended for use primarily to allow the programmer control over CP0 hazards by converting instructions into cycles in a superscalar processor. For example, to insert at least two cycles between an MTC0 and an ERET, one would use the following sequence:

```
mfc0    x,y
ssnop
ssnop
eret
```

Based on the normal issues rules of the processor, the MTC0 issues in cycle T. Because the SSNOP instructions must issue alone, they may issue no earlier than cycle T+1 and cycle T+2, respectively. Finally, the ERET issues no earlier than cycle T+3. Note that although the instruction after an SSNOP may issue no earlier than the cycle after the SSNOP is issued, that instruction may issue later. This is because other implementation-dependent issue rules may apply that prevent an issue in the next cycle. Processors should not introduce any unnecessary delay in issuing SSNOP instructions.

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	SUB 0110010000

Format: SUB rd, rs, rt

microMIPS

Purpose: Subtract Word

To subtract 32-bit integers. If overflow occurs, then trap

Description: $GPR[rd] \leftarrow GPR[rs] - GPR[rt]$

The 32-bit word value in GPR *rt* is subtracted from the 32-bit value in GPR *rs* to produce a 32-bit result. If the subtraction results in 32-bit 2's complement arithmetic overflow, then the destination register is not modified and an Integer Overflow exception occurs. If it does not overflow, the 32-bit result is sign-extended and placed into GPR *rd*.

Restrictions:

On 64-bit processors, if either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← (GPR[rs]31 | GPR[rs]31..0) - (GPR[rt]31 | GPR[rt]31..0)
if temp32 ≠ temp31 then
    SignalException(IntegerOverflow)
else
    GPR[rd] ← sign_extend(temp31..0)
endif

```

Exceptions:

Integer Overflow

Programming Notes:

SUBU performs the same arithmetic operation but does not trap on overflow.

31	26 25	21 20	16 15	11 10 9 8 7	5	0
POOL32F 010101	ft	fs	fd	0 fmt	SUB(fmt 01110000)	8

Format: SUB(fmt

SUB.S fd, fs, ft

microMIPS

SUB.D fd, fs, ft

microMIPS

SUB.PS fd, fs, ft

microMIPS

Purpose: Floating Point Subtract

To subtract FP values

Description: $FPR[fd] \leftarrow FPR[fs] - FPR[ft]$

The value in FPR *ft* is subtracted from the value in FPR *fs*. The result is calculated to infinite precision, rounded according to the current rounding mode in *FCSR*, and placed into FPR *fd*. The operands and result are values in format *fmt*. SUB.PS subtracts the upper and lower halves of FPR *fs* and FPR *ft* independently, and ORs together any generated exceptional conditions.

Restrictions:

The fields *fs*, *ft*, and *fd* must specify FPRs valid for operands of type *fmt*. If they are not valid, the result is **UNPREDICTABLE**.

The operands must be values in format *fmt*; if they are not, the result is **UNPREDICTABLE** and the value of the operand FPRs becomes **UNPREDICTABLE**.

The result of SUB.PS is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
StoreFPR (fd, fmt, ValueFPR(fs, fmt) -fmt ValueFPR(ft, fmt))
```

CPU Exceptions:

Coprocessor Unusable, Reserved Instruction

FPU Exceptions:

Inexact, Overflow, Underflow, Invalid Op, Unimplemented Op

31	26 25	21 20	16 15	11 10	6 5	0
POOL32A 000000	rt	rs	rd	0	SUBU32 0111010000	10

Format: SUBU rd, rs, rt

microMIPS

Purpose: Subtract Unsigned Word

To subtract 32-bit integers

Description: $GPR[rd] \leftarrow GPR[rs] - GPR[rt]$

The 32-bit word value in GPR *rt* is subtracted from the 32-bit value in GPR *rs* and the 32-bit arithmetic result is sign-extended and placed into GPR *rd*.

No integer overflow exception occurs under any circumstances.

Restrictions:

On 64-bit processors, if either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```
if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← GPR[rs] - GPR[rt]
GPR[rd] ← sign_extend(temp)
```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	index	base	fd	00	SUXC1 110001000

6 5 5 5 2 9

Format: SUXC1 fd, index(base)**microMIPS****Purpose:** Store Doubleword Indexed Unaligned from Floating Point

To store a doubleword from an FPR to memory (GPR+GPR addressing) ignoring alignment

Description: memory[(GPR[base] + GPR[index])_{PSIZE-1..3}] ← FPR[fd]

The contents of the 64-bit doubleword in FPR *fd* is stored at the memory location specified by the effective address. The contents of GPR *index* and GPR *base* are added to form the effective address. The effective address is double-word-aligned; EffectiveAddress_{2..0} are ignored.

Restrictions:

The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

```
vAddr ← (GPR[base]+GPR[index])63..3 || 03
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
datadoubleword ← ValueFPR(fd, UNINTERPRETED_DOUBLEWORD)
StoreMemory(CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)
```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, TLB Modified, Watch

31	26 25	21 20	16 15	0
SW32 111110	rt	base		offset

6 5 5 16

Format: SW rt, offset(base)**microMIPS****Purpose:** Store Word

To store a word to memory

Description: memory[GPR[base] + offset] \leftarrow GPR[rt]The least-significant 32-bit word of GPR *rt* is stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.**Restrictions:**

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr  $\leftarrow$  sign_extend(offset) + GPR[base]
if vAddr1..0  $\neq$  02 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation(vAddr, DATA, STORE)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword  $\leftarrow$  GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	ST-EVA 1010	SWE 111	offset	

Format: SWE rt, offset(base)

microMIPS

Purpose:

To store a word to user mode virtual address space when executing in kernel mode.

Description:

$\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rt]$

The least-significant 32-bit word of GPR *rt* is stored in memory at the location specified by the aligned effective address. The 9-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

The SWE instruction functions in exactly the same fashion as the SW instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the Config5_{EVA} field being set to one.

Restrictions:

Only usable in kernel mode when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
```

Exceptions:

TLB Refill

TLB Invalid

Bus Error

Address Error

Watch

Reserved Instruction

Coprocessor Unusable

31	26 25	21 20	16 15	0
SWC132 100110	ft	base	offset	

SWC1 ft, offset(base)

microMIPS

Purpose: Store Word from Floating Point

To store a word from an FPR to memory

Description: `memory[GPR[base] + offset] ← FPR[ft]`The low 32-bit word from FPR *ft* is stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.**Restrictions:**An Address Error exception occurs if EffectiveAddress_{1..0} ≠ 0 (not word-aligned).**Operation:**

```

vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← ValueFPR(ft, UNINTERPRETED_WORD) || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	0
POOL32B 001000	rt	base	SWC2 1000	offset

6 5 5 16

Format: SWC2 rt, offset(base)

microMIPS

Purpose: Store Word from Coprocessor 2

To store a word from a COP2 register to memory

Description: $\text{memory}[\text{GPR}[\text{base}] + \text{offset}] \leftarrow \text{CPR}[2, \text{rt}, 0]$

The low 32-bit word from COP2 (Coprocessor 2) register *rt* is stored in memory at the location specified by the aligned effective address. The 16-bit signed *offset* is added to the contents of GPR *base* to form the effective address.

Restrictions:

An Address Error exception occurs if EffectiveAddress_{1..0} ≠ 0 (not word-aligned).

Operation:

```
vAddr ← sign_extend(offset) + GPR[base]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← CPR[2, rt, 0]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
```

Exceptions:

Coprocessor Unusable, Reserved Instruction, TLB Refill, TLB Invalid, TLB Modified, Address Error, Watch

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	SWL 1000	offset	

6 5 5 5 12

Format: SWL rt, offset(base)

microMIPS

Purpose: Store Word Left

To store the most-significant part of a word to an unaligned memory address


Description: $\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rt]$

The 12-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the most-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.


A part of *W*, the most-significant 1 to 4 bytes, is in the aligned word containing *EffAddr*. The same number of the most-significant (left) bytes from the word in GPR *rt* are stored into these bytes of *W*.

If GPR *rt* is a 64-bit register, the source word is the low word of the register.

The following figure illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is located in the aligned word containing the most-significant byte at 2. First, SWL stores the most-significant 2 bytes of the low word from the source register into these 2 bytes in memory. Next, the complementary SWR stores the remainder of the unaligned word.

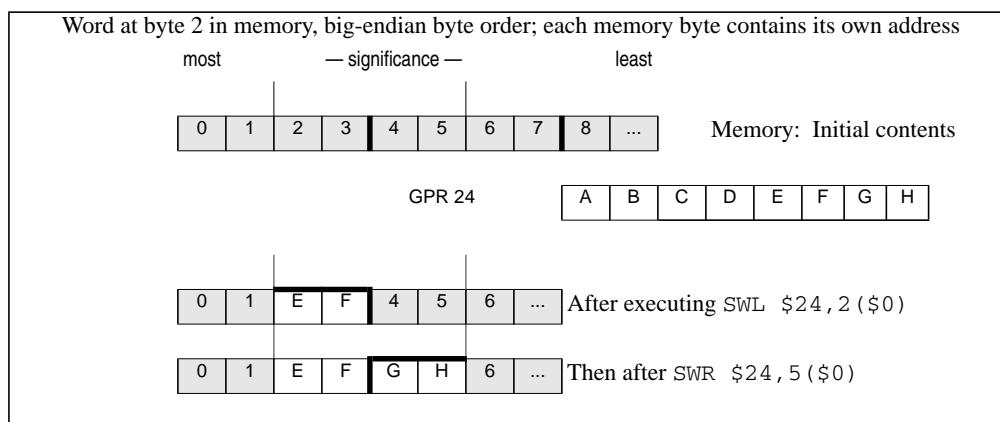Figure 5.28 Unaligned Word Store Using SWL and SWR

The bytes stored from the source register to memory depend on both the offset of the effective address within an aligned word—that is, the low 2 bits of the address ($vAddr_{1..0}$)—and the current byte-ordering mode of the processor (big- or little-endian). The following figure shows the bytes stored for every combination of offset and byte ordering.

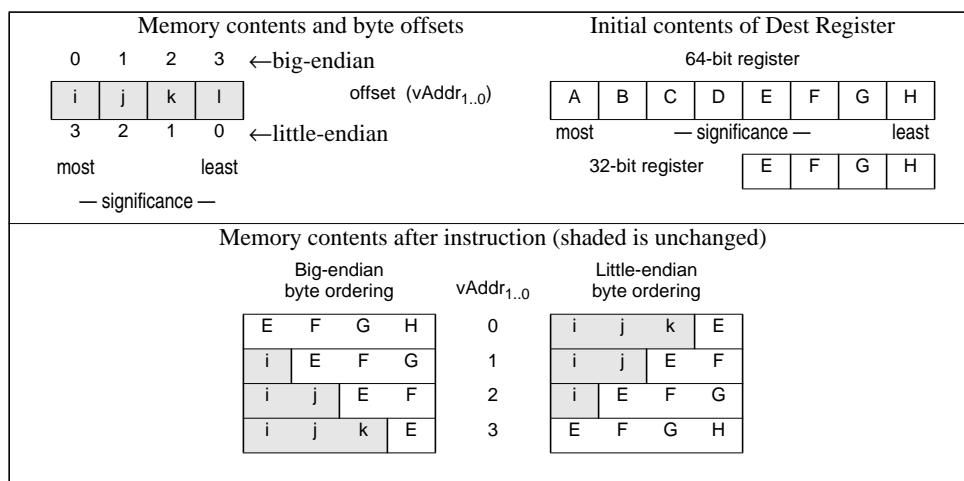Figure 5.29 Bytes Stored by an SWL Instruction**Restrictions:**

None

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
If BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..2 || 02
endif
byte ← vAddr1..0 xor BigEndianCPU2
if (vAddr2 xor BigEndianCPU) = 0 then
    datadoubleword ← 032 || 024-8*byte || GPR[rt]31..24-8*byte
else
    datadoubleword ← 024-8*byte || GPR[rt]31..24-8*byte || 032
endif

StoreMemory(CCA, byte, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error , Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	ST-EVA 1010	SWLE 000	offset	

6 5 5 4 3 9

Format: SWLE rt, offset(base)

microMIPS

Purpose: Store Word Left EVA

To store the most-significant part of a word to an unaligned user mode virtual address while operating in kernel mode.

Description: $\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rt]$


The 9-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the most-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.

A part of *W*, the most-significant 1 to 4 bytes, is in the aligned word containing *EffAddr*. The same number of the most-significant (left) bytes from the word in GPR *rt* are stored into these bytes of *W*.

If GPR *rt* is a 64-bit register, the source word is the low word of the register.

The following figure illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is located in the aligned word containing the most-significant byte at 2. First, SWLE stores the most-significant 2 bytes of the low word from the source register into these 2 bytes in memory. Next, the complementary SWRE stores the remainder of the unaligned word.


Figure 5.30 Unaligned Word Store Using SWLE and SWRE

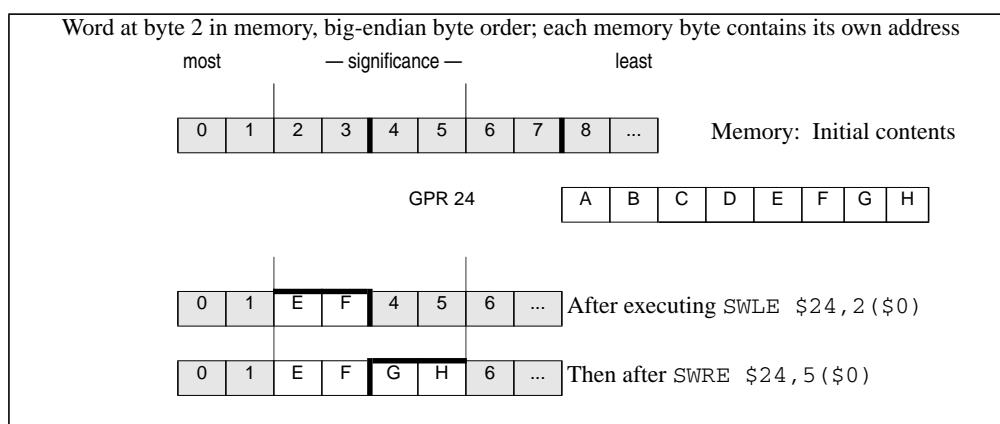

The bytes stored from the source register to memory depend on both the offset of the effective address within an aligned word—that is, the low 2 bits of the address ($vAddr_{1..0}$)—and the current byte-ordering mode of the processor (big- or little-endian). The following figure shows the bytes stored for every combination of offset and byte ordering.

The SWLE instruction functions in exactly the same fashion as the SWL instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the $\text{Config5}_{\text{EVA}}$ field being set to one.

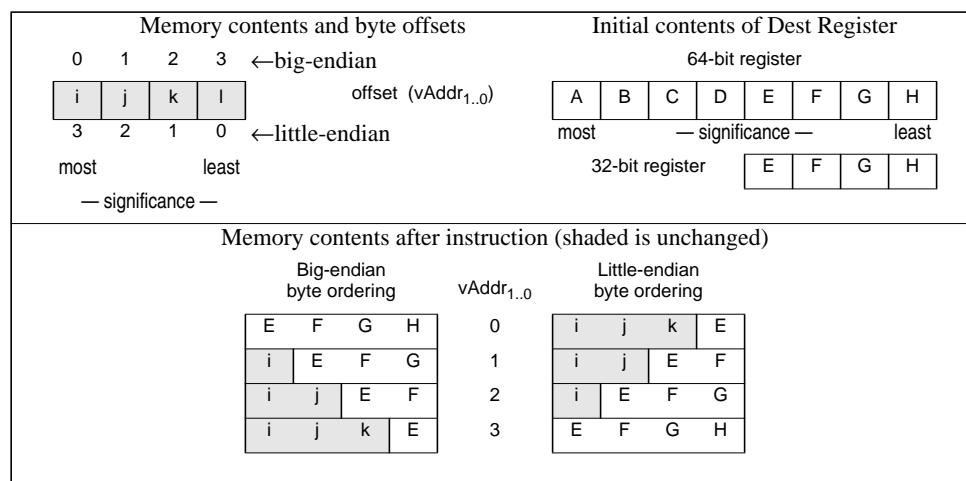Figure 5.31 Bytes Stored by an SWLE Instruction**Restrictions:**

Only usable when access to Coprocessor0 is enabled and when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```

 $vAddr \leftarrow sign\_extend(offset) + GPR[base]$ 
 $(pAddr, CCA) \leftarrow AddressTranslation(vAddr, DATA, STORE)$ 
 $pAddr \leftarrow pAddr_{PSIZE-1..3} || (pAddr_{2..0} \oplus ReverseEndian^3)$ 
If BigEndianMem = 0 then
     $pAddr \leftarrow pAddr_{PSIZE-1..2} || 0^2$ 
endif
byte  $\leftarrow vAddr_{1..0} \oplus BigEndianCPU^2$ 
if  $(vAddr_2 \oplus BigEndianCPU) = 0$  then
    datadoubleword  $\leftarrow 0^{32} || 0^{24-8*byte} || GPR[rt]_{31..24-8*byte}$ 
else
    datadoubleword  $\leftarrow 0^{24-8*byte} || GPR[rt]_{31..24-8*byte} || 0^{32}$ 
endif
StoreMemory(CCA, byte, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error , Watch, Reserved Instruction, Coprocessor Unusable

31	26 25	21 20	16 15	12 11	0
POOL32C 011000	rt	base	SWR 1001	offset	

6 5 5 5 12

Format: SWR rt, offset(base)

microMIPS

Purpose: Store Word Right

To store the least-significant part of a word to an unaligned memory address

Description: $\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rt]$


The 12-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the least-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.

A part of *W*, the least-significant 1 to 4 bytes, is in the aligned word containing *EffAddr*. The same number of the least-significant (right) bytes from the word in GPR *rt* are stored into these bytes of *W*.


If GPR *rt* is a 64-bit register, the source word is the low word of the register.

The following figure illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is contained in the aligned word containing the least-significant byte at 5. First, SWR stores the least-significant 2 bytes of the low word from the source register into these 2 bytes in memory. Next, the complementary SWL stores the remainder of the unaligned word.

Figure 5.32 Unaligned Word Store Using SWR and SWL

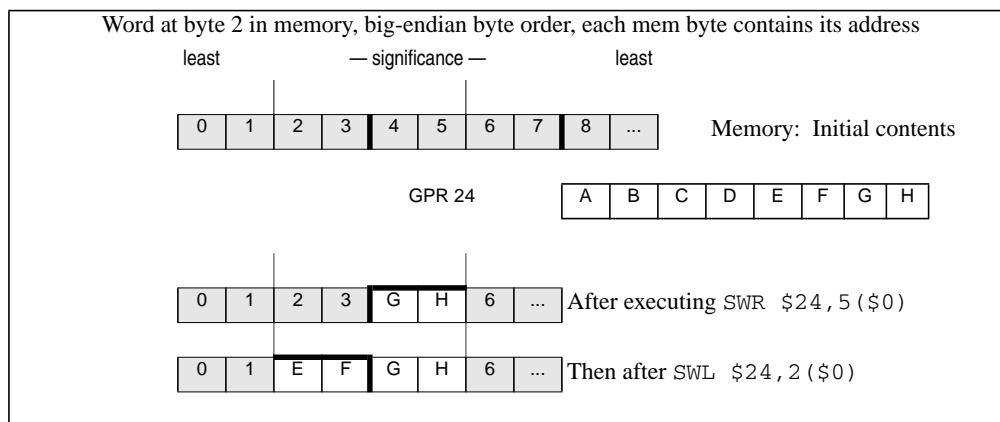

The bytes stored from the source register to memory depend on both the offset of the effective address within an aligned word—that is, the low 2 bits of the address ($vAddr_{1..0}$)—and the current byte-ordering mode of the processor (big- or little-endian). The following figure shows the bytes stored for every combination of offset and byte-ordering.

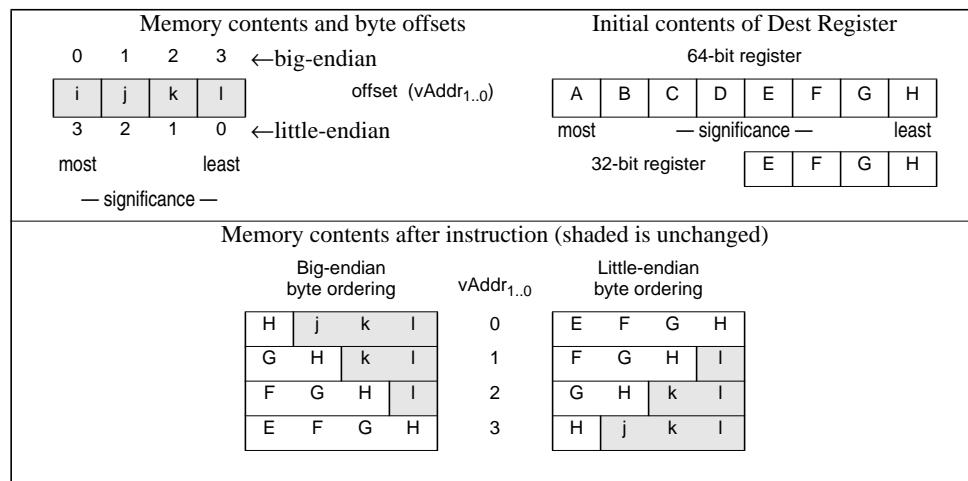Figure 5.33 Bytes Stored by SWR Instruction**Restrictions:**

None

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
If BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..2 || 02
endif
byte ← vAddr1..0 xor BigEndianCPU2
if (vAddr2 xor BigEndianCPU) = 0 then
    datadoubleword ← 032 || GPR[rt]31-8*byte..0 || 08*byte
else
    datadoubleword ← GPR[rt]31-8*byte..0 || 08*byte || 032
endif

StoreMemory(CCA, WORD-byte, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Watch

31	26 25	21 20	16 15	12 11	9 8	0
POOL32C 011000	rt	base	ST-EVA 1010	SWRE 001	offset	

6 5 5 4 3 9

Format: SWRE rt, offset(base)

microMIPS

Purpose: Store Word Right EVA

To store the least-significant part of a word to an unaligned user mode virtual address while operating in kernel mode.


Description: $\text{memory}[\text{GPR}[base] + \text{offset}] \leftarrow \text{GPR}[rt]$

The 9-bit signed *offset* is added to the contents of GPR *base* to form an effective address (*EffAddr*). *EffAddr* is the address of the least-significant of 4 consecutive bytes forming a word (*W*) in memory starting at an arbitrary byte boundary.

A part of *W*, the least-significant 1 to 4 bytes, is in the aligned word containing *EffAddr*. The same number of the least-significant (right) bytes from the word in GPR *rt* are stored into these bytes of *W*.

If GPR *rt* is a 64-bit register, the source word is the low word of the register.


The following figure illustrates this operation using big-endian byte ordering for 32-bit and 64-bit registers. The 4 consecutive bytes in 2..5 form an unaligned word starting at location 2. A part of *W*, 2 bytes, is contained in the aligned word containing the least-significant byte at 5. First, SWRE stores the least-significant 2 bytes of the low word from the source register into these 2 bytes in memory. Next, the complementary SWLE stores the remainder of the unaligned word.

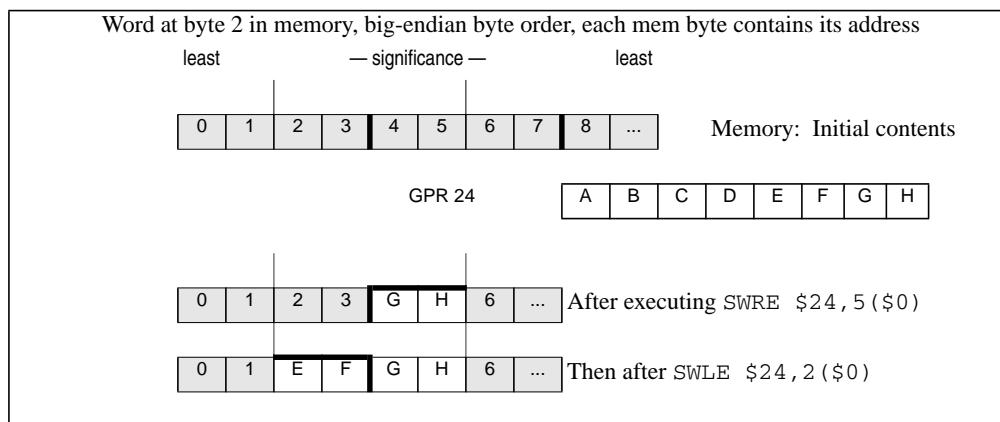Figure 5.34 Unaligned Word Store Using SWRE and SWLE

The bytes stored from the source register to memory depend on both the offset of the effective address within an aligned word—that is, the low 2 bits of the address ($vAddr_{1..0}$)—and the current byte-ordering mode of the processor (big- or little-endian). The following figure shows the bytes stored for every combination of offset and byte-ordering.

The LWE instruction functions in exactly the same fashion as the LW instruction, except that address translation is performed using the user mode virtual address space mapping in the TLB when accessing an address within a memory segment configured to use the MUSUK access mode. Memory segments using UUSK or MUSK access modes are also accessible. Refer to Volume III, Enhanced Virtual Addressing section for additional information.

Implementation of this instruction is specified by the $Config5_{EVA}$ field being set to one.

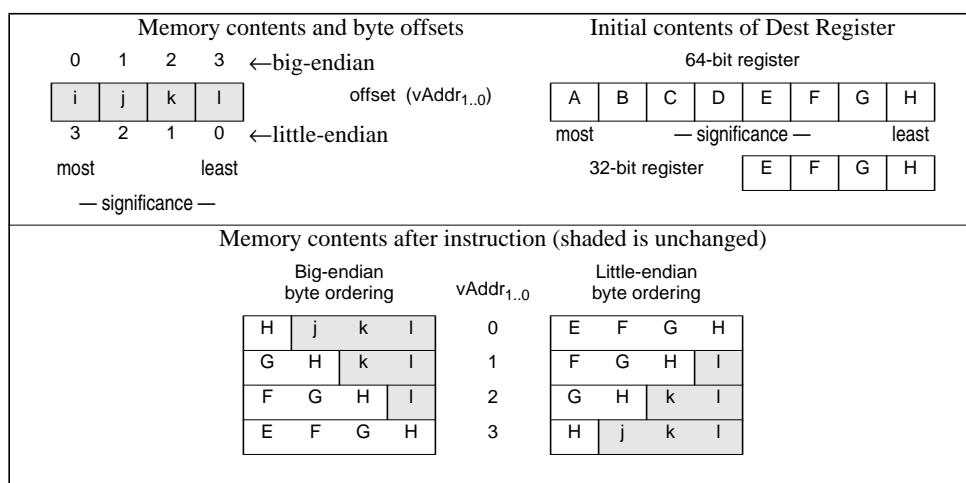Figure 5.35 Bytes Stored by SWRE Instruction**Restrictions:**

Only usable when access to Coprocessor0 is enabled and when accessing an address within a segment configured using UUSK, MUSK or MUSUK access mode.

Operation:

```

vAddr ← sign_extend(offset) + GPR[base]
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
If BigEndianMem = 0 then
    pAddr ← pAddrPSIZE-1..2 || 02
endif
byte ← vAddr1..0 xor BigEndianCPU2
if (vAddr2 xor BigEndianCPU) = 0 then
    datadoubleword ← 032 || GPR[rt]31-8*byte..0 || 08*byte
else
    datadoubleword ← GPR[rt]31-8*byte..0 || 08*byte || 032
endif
StoreMemory(CCA, WORD-byte, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Watch, Coprocessor Unusable

31	26 25	21 20	16 15	11 10 9 8	0
POOL32F 010101	index	base	fd	00	SWXC1 010001000

6 5 5 5 2 9

Format: SWXC1 fd, index(base)microMIPS
microMIPS**Purpose:** Store Word Indexed from Floating Point

To store a word from an FPR to memory (GPR+GPR addressing)

Description: memory[GPR[base] + GPR[index]] \leftarrow FPR[fd]The low 32-bit word from FPR *fd* is stored in memory at the location specified by the aligned effective address. The contents of GPR *index* and GPR *base* are added to form the effective address.**Restrictions:**An Address Error exception occurs if EffectiveAddress_{1..0} \neq 0 (not word-aligned).**Operation:**

```

vAddr  $\leftarrow$  GPR[base] + GPR[index]
if vAddr1..0  $\neq$  03 then
    SignalException(AddressError)
endif
(pAddr, CCA)  $\leftarrow$  AddressTranslation(vAddr, DATA, STORE)
pAddr  $\leftarrow$  pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel  $\leftarrow$  vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword  $\leftarrow$  ValueFPR(fd, UNINTERPRETED_WORD) || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Reserved Instruction, Coprocessor Unusable, Watch

31	26 25		16 15		6 5	0
POOL32A 000000	0 0000000000	stype	SYNC 0110101101		POOL32AXf 111100	6

Format: SYNC (stype = 0 implied)
SYNC stype

microMIPS
microMIPS

Purpose: To order loads and stores for shared memory.

Description:

These types of ordering guarantees are available through the SYNC instruction:

- Completion Barriers
- Ordering Barriers

Simple Description for Completion Barrier:

- The barrier affects only *uncached* and *cached coherent* loads and stores.
- The specified memory instructions (loads or stores or both) that occur before the SYNC instruction must be completed before the specified memory instructions after the SYNC are allowed to start.
- Loads are completed when the destination register is written. Stores are completed when the stored value is visible to every other processor in the system.

Detailed Description for Completion Barrier:

- Every synchronizable specified memory instruction (loads or stores or both) that occurs in the instruction stream before the SYNC instruction must be already globally performed before any synchronizable specified memory instructions that occur after the SYNC are allowed to be performed, with respect to any other processor or coherent I/O module.
- The barrier does not guarantee the order in which instruction fetches are performed.
- A stype value of zero will always be defined such that it performs the most complete set of synchronization operations that are defined. This means stype zero always does a completion barrier that affects both loads and stores preceding the SYNC instruction and both loads and stores that are subsequent to the SYNC instruction. Non-zero values of stype may be defined by the architecture or specific implementations to perform synchronization behaviors that are less complete than that of stype zero. If an implementation does not use one of these non-zero values to define a different synchronization behavior, then that non-zero value of stype must act the same as stype zero completion barrier. This allows software written for an implementation with a lighter-weight barrier to work on another implementation which only implements the stype zero completion barrier.
- A completion barrier is required, potentially in conjunction with SSNOP (in Release 1 of the Architecture) or EHB (in Release 2 of the Architecture), to guarantee that memory reference results are visible across operating mode changes. For example, a completion barrier is required on some implementations on entry to and exit from Debug Mode to guarantee that memory effects are handled correctly.

SYNC behavior when the stype field is zero:

- A completion barrier that affects preceding loads and stores and subsequent loads and stores.

Simple Description for Ordering Barrier:

- The barrier affects only *uncached* and *cached coherent* loads and stores.
- The specified memory instructions (loads or stores or both) that occur before the SYNC instruction must always be ordered before the specified memory instructions after the SYNC.
- Memory instructions which are ordered before other memory instructions are processed by the load/store datapath first before the other memory instructions.

Detailed Description for Ordering Barrier:

- Every synchronizable specified memory instruction (loads or stores or both) that occurs in the instruction stream before the SYNC instruction must reach a stage in the load/store datapath after which no instruction re-ordering is possible before any synchronizable specified memory instruction which occurs after the SYNC instruction in the instruction stream reaches the same stage in the load/store datapath.
- If any memory instruction before the SYNC instruction in program order, generates a memory request to the external memory and any memory instruction after the SYNC instruction in program order also generates a memory request to external memory, the memory request belonging to the older instruction must be globally performed before the time the memory request belonging to the younger instruction is globally performed.
- The barrier does not guarantee the order in which instruction fetches are performed.

As compared to the completion barrier, the ordering barrier is a lighter-weight operation as it does not require the specified instructions before the SYNC to be already completed. Instead it only requires that those specified instructions which are subsequent to the SYNC in the instruction stream are never re-ordered for processing ahead of the specified instructions which are before the SYNC in the instruction stream. This potentially reduces how many cycles the barrier instruction must stall before it completes.

The Acquire and Release barrier types are used to minimize the memory orderings that must be maintained and still have software synchronization work.

Implementations that do not use any of the non-zero values of stype to define different barriers, such as ordering barriers, must make those stype values act the same as stype zero.

For the purposes of this description, the CACHE, PREF and PREFIX instructions are treated as loads and stores. That is, these instructions and the memory transactions sourced by these instructions obey the ordering and completion rules of the SYNC instruction.

Table 5.28 lists the available completion barrier and ordering barriers behaviors that can be specified using the stype field..

Table 5.28 Encodings of the Bits[10:6] of the SYNC instruction; the SType Field

Code	Name	Older instructions which must reach the load/store ordering point before the SYNC instruction completes.	Younger instructions which must reach the load/store ordering point only after the SYNC instruction completes.	Older instructions which must be globally performed when the SYNC instruction completes	Compliance
0x0	SYNC or SYNC 0	Loads, Stores	Loads, Stores	Loads, Stores	Required
0x4	SYNC_WMB or SYNC 4	Stores	Stores		Optional
0x10	SYNC_MB or SYNC 16	Loads, Stores	Loads, Stores		Optional
0x11	SYNC_ACQUIRE or SYNC 17	Loads	Loads, Stores		Optional
0x12	SYNC_RELEASE or SYNC 18	Loads, Stores	Stores		Optional
0x13	SYNC_RMB or SYNC 19	Loads	Loads		Optional
0x1-0x3, 0x5-0xF					Implementation-Specific and Vendor Specific Sync Types
0x14 - 0x1F	RESERVED				Reserved for MIPS Technologies for future extension of the architecture.

Terms:

Synchronizable: A load or store instruction is *synchronizable* if the load or store occurs to a physical location in shared memory using a virtual location with a memory access type of either *uncached* or *cached coherent*. *Shared memory* is memory that can be accessed by more than one processor or by a coherent I/O system module.

Performed load: A load instruction is *performed* when the value returned by the load has been determined. The result of a load on processor A has been *determined* with respect to processor or coherent I/O module B when a subsequent

store to the location by B cannot affect the value returned by the load. The store by B must use the same memory access type as the load.

Performed store: A store instruction is *performed* when the store is observable. A store on processor A is *observable* with respect to processor or coherent I/O module B when a subsequent load of the location by B returns the value written by the store. The load by B must use the same memory access type as the store.

Globally performed load: A load instruction is *globally performed* when it is performed with respect to all processors and coherent I/O modules capable of storing to the location.

Globally performed store: A store instruction is *globally performed* when it is globally observable. It is *globally observable* when it is observable by all processors and I/O modules capable of loading from the location.

Coherent I/O module: A *coherent I/O module* is an Input/Output system component that performs coherent Direct Memory Access (DMA). It reads and writes memory independently as though it were a processor doing loads and stores to locations with a memory access type of *cached coherent*.

Load/Store Datapath: The portion of the processor which handles the load/store data requests coming from the processor pipeline and processes those requests within the cache and memory system hierarchy.

Restrictions:

The effect of SYNC on the global order of loads and stores for memory access types other than *uncached* and *cached coherent* is **UNPREDICTABLE**.

Operation:

```
SyncOperation(stype)
```

Exceptions:

None

Programming Notes:

A processor executing load and store instructions observes the order in which loads and stores using the same memory access type occur in the instruction stream; this is known as *program order*.

A *parallel program* has multiple instruction streams that can execute simultaneously on different processors. In multiprocessor (MP) systems, the order in which the effects of loads and stores are observed by other processors—the *global order* of the loads and store—determines the actions necessary to reliably share data in parallel programs.

When all processors observe the effects of loads and stores in program order, the system is *strongly ordered*. On such systems, parallel programs can reliably share data without explicit actions in the programs. For such a system, SYNC has the same effect as a NOP. Executing SYNC on such a system is not necessary, but neither is it an error.

If a multiprocessor system is not strongly ordered, the effects of load and store instructions executed by one processor may be observed out of program order by other processors. On such systems, parallel programs must take explicit actions to reliably share data. At critical points in the program, the effects of loads and stores from an instruction stream must occur in the same order for all processors. SYNC separates the loads and stores executed on the processor into two groups, and the effect of all loads and stores in one group is seen by all processors before the effect of any load or store in the subsequent group. In effect, SYNC causes the system to be strongly ordered for the executing processor at the instant that the SYNC is executed.

Many MIPS-based multiprocessor systems are strongly ordered or have a mode in which they operate as strongly ordered for at least one memory access type. The MIPS architecture also permits implementation of MP systems that are not strongly ordered; SYNC enables the reliable use of shared memory on such systems. A parallel program that does not use SYNC generally does not operate on a system that is not strongly ordered. However, a program that does use SYNC works on both types of systems. (System-specific documentation describes the actions needed to reliably

share data in parallel programs for that system.)

The behavior of a load or store using one memory access type is **UNPREDICTABLE** if a load or store was previously made to the same physical location using a different memory access type. The presence of a SYNC between the references does not alter this behavior.

SYNC affects the order in which the effects of load and store instructions appear to all processors; it does not generally affect the physical memory-system ordering or synchronization issues that arise in system programming. The effect of SYNC on implementation-specific aspects of the cached memory system, such as writeback buffers, is not defined.

```
# Processor A (writer)
# Conditions at entry:
# The value 0 has been stored in FLAG and that value is observable by B
SW      R1, DATA          # change shared DATA value
LI      R2, 1
SYNC
SW      R2, FLAG          # say that the shared DATA value is valid

# Processor B (reader)
LI      R2, 1
1: LW      R1, FLAG    # Get FLAG
BNE    R2, R1, 1B# if it says that DATA is not valid, poll again
NOP
SYNC          # FLAG value checked before doing DATA read
LW      R1, DATA    # Read (valid) shared DATA value
```

The code fragments above shows how SYNC can be used to coordinate the use of shared data between separate writer and reader instruction streams in a multiprocessor environment. The FLAG location is used by the instruction streams to determine whether the shared data item DATA is valid. The SYNC executed by processor A forces the store of DATA to be performed globally before the store to FLAG is performed. The SYNC executed by processor B ensures that DATA is not read until after the FLAG value indicates that the shared data is valid.

Software written to use a SYNC instruction with a non-zero stype value, expecting one type of barrier behavior, should only be run on hardware that actually implements the expected barrier behavior for that non-zero stype value or on hardware which implements a superset of the behavior expected by the software for that stype value. If the hardware does not perform the barrier behavior expected by the software, the system may fail.

31	26 25	21 20	16 15	0
POOL32I 010000	SYNCI 10000	base	offset	

6 5 5 16

Format: SYNCI offset (base)

microMIPS

Purpose: Synchronize Caches to Make Instruction Writes Effective

To synchronize all caches to make instruction writes effective.

Description:

This instruction is used after a new instruction stream is written to make the new instructions effective relative to an instruction fetch, when used in conjunction with the SYNC and JALR.HB, JR.HB, or ERET instructions, as described below. Unlike the CACHE instruction, the SYNCI instruction is available in all operating modes in an implementation of Release 2 of the architecture.

The 16-bit offset is sign-extended and added to the contents of the base register to form an effective address. The effective address is used to address the cache line in all caches which may need to be synchronized with the write of the new instructions. The operation occurs only on the cache line which may contain the effective address. One SYNCI instruction is required for every cache line that was written. See the Programming Notes below.

A TLB Refill and TLB Invalid (both with cause code equal TLBL) exception can occur as a byproduct of this instruction. This instruction never causes TLB Modified exceptions nor TLB Refill exceptions with a cause code of TLBS. This instruction never causes Execute-Inhibit nor Read-Inhibit exceptions.

A Cache Error exception may occur as a byproduct of this instruction. For example, if a writeback operation detects a cache or bus error during the processing of the operation, that error is reported via a Cache Error exception. Similarly, a Bus Error Exception may occur if a bus operation invoked by this instruction is terminated in an error.

An Address Error Exception (with cause code equal AdEL) may occur if the effective address references a portion of the kernel address space which would normally result in such an exception. It is implementation dependent whether such an exception does occur.

It is implementation dependent whether a data watch is triggered by a SYNCI instruction whose address matches the Watch register address match conditions. In multiprocessor implementations where instruction caches are not coherently maintained by hardware, the SYNCI instruction may optionally affect all coherent icaches within the system. If the effective address uses a coherent Cacheability and Coherency Attribute (CCA), then the operation may be *globalized*, meaning it is broadcast to all of the coherent instruction caches within the system. If the effective address does not use one of the coherent CCAs, there is no broadcast of the SYNCI operation. If multiple levels of caches are to be affected by one SYNCI instruction, all of the affected cache levels must be processed in the same manner - either all affected cache levels use the globalized behavior or all affected cache levels use the non-globalized behavior.

In multiprocessor implementations where instruction caches are coherently maintained by hardware, the SYNCI instruction should behave as a NOP instruction.

Restrictions:

The operation of the processor is **UNPREDICTABLE** if the effective address references any instruction cache line that contains instructions to be executed between the SYNCI and the subsequent JALR.HB, JR.HB, or ERET instruction required to clear the instruction hazard.

The SYNCI instruction has no effect on cache lines that were previously locked with the CACHE instruction. If correct software operation depends on the state of a locked line, the CACHE instruction must be used to synchronize the caches.

The SYNCI instruction acts on the current processor at a minimum. It is implementation specific whether it affects

the caches on other processors in a multi-processor system, except as required to perform the operation on the current processor (as might be the case if multiple processors share an L2 or L3 cache).

Full visibility of the new instruction stream requires execution of a subsequent SYNC instruction, followed by a JALR.HB, JR.HB, DERET, or ERET instruction. The operation of the processor is **UNPREDICTABLE** if this sequence is not followed.

Operation:

```
vaddr ← GPR[base] + sign_extend(offset)
SynchronizeCacheLines(vaddr)      /* Operate on all caches */
```

Exceptions:

Reserved Instruction Exception (Release 1 implementations only)

TLB Refill Exception

TLB Invalid Exception

Address Error Exception

Cache Error Exception

Bus Error Exception

Programming Notes:

When the instruction stream is written, the SYNCI instruction should be used in conjunction with other instructions to make the newly-written instructions effective. The following example shows a routine which can be called after the new instruction stream is written to make those changes effective. Note that the SYNCI instruction could be replaced with the corresponding sequence of CACHE instructions (when access to Coprocessor 0 is available), and that the JR.HB instruction could be replaced with JALR.HB, ERET, or DERET instructions, as appropriate. A SYNC instruction is required between the final SYNCI instruction in the loop and the instruction that clears instruction hazards.

```
/*
 * This routine makes changes to the instruction stream effective to the
 * hardware. It should be called after the instruction stream is written.
 * On return, the new instructions are effective.
 *
 * Inputs:
 *      a0 = Start address of new instruction stream
 *      a1 = Size, in bytes, of new instruction stream
 */

    beq    a1, zero, 20f      /* If size==0, */
    nop                /* branch around */
    addu   a1, a0, a1      /* Calculate end address + 1 */
                           /* (daddu for 64-bit addressing) */
    rdhwr  v0, HW_SYNCI_Step /* Get step size for SYNCI from new */
                           /* Release 2 instruction */
    beq    v0, zero, 20f      /* If no caches require synchronization, */
    nop                /* branch around */
10: synci 0(a0)          /* Synchronize all caches around address */
    addu   a0, a0, v0      /* Add step size in delay slot */
                           /* (daddu for 64-bit addressing) */
    sltu   v1, a0, a1      /* Compare current with end address */
    bne    v1, zero, 10b    /* Branch if more to do */
    nop                /* branch around */
    sync               /* Clear memory hazards */
20: jr.hb ra             /* Return, clearing instruction hazards */
    nop
```


31	26 25	16 15	6 5	0
POOL32A 000000	code	SYSCALL 1000101101	POOL32AXf 111100	6

Format: SYSCALL

microMIPS

Purpose: System Call

To cause a System Call exception

Description:

A system call exception occurs, immediately and unconditionally transferring control to the exception handler.

The *code* field is available for use as software parameters, but is retrieved by the exception handler only by loading the contents of the memory word containing the instruction.

Restrictions:

None

Operation:

```
SignalException(SystemCall)
```

Exceptions:

System Call

31	26 25	21 20	16 15	12 11	6 5	0
POOL32A 000000	rt	rs	code	TEQ 000000	POOL32AXf 111100	6

Format: TEQ rs, rt

microMIPS

Purpose: Trap if Equal

To compare GPRs and do a conditional trap

Description: if GPR[rs] = GPR[rt] then Trap

Compare the contents of GPR *rs* and GPR *rt* as signed integers; if GPR *rs* is equal to GPR *rt*, then take a Trap exception.

The contents of the *code* field are ignored by hardware and may be used to encode information for system software. To retrieve the information, system software must load the instruction word from memory.

Restrictions:

None

Operation:

```
if GPR[rs] = GPR[rt] then
    SignalException(Trap)
endif
```

Exceptions:

Trap

31	26 25	21 20	16 15	0
POOL32I 010000	TEQI 01110	rs	immediate	

6 5 5 16

Format: TEQI rs, immediate**microMIPS****Purpose:** Trap if Equal Immediate

To compare a GPR to a constant and do a conditional trap

Description: if GPR[rs] = immediate then TrapCompare the contents of GPR *rs* and the 16-bit signed *immediate* as signed integers; if GPR *rs* is equal to *immediate*, then take a Trap exception.**Restrictions:**

None

Operation:

```

if GPR[rs] = sign_extend(immediate) then
    SignalException(Trap)
endif

```

Exceptions:

Trap

31	26 25	21 20	16 15	12 11	6 5	0
POOL32A 000000	rt	rs	code	TGE 001000	POOL32AXf 111100	6

Format: TGE rs, rt

microMIPS

Purpose: Trap if Greater or Equal

To compare GPRs and do a conditional trap

Description: if GPR[rs] \geq GPR[rt] then TrapCompare the contents of GPR *rs* and GPR *rt* as signed integers; if GPR *rs* is greater than or equal to GPR *rt*, then take a Trap exception.The contents of the *code* field are ignored by hardware and may be used to encode information for system software. To retrieve the information, system software must load the instruction word from memory.**Restrictions:**

None

Operation:

```

if GPR[rs]  $\geq$  GPR[rt] then
    SignalException(Trap)
endif

```

Exceptions:

Trap

31	26 25	21 20	16 15	0
POOL32I 010000	TGEI 01001	rs	immediate	

6 5 5 16

Format: TGEI rs, immediate**microMIPS****Purpose:** Trap if Greater or Equal Immediate

To compare a GPR to a constant and do a conditional trap

Description: if GPR[rs] \geq immediate then TrapCompare the contents of GPR *rs* and the 16-bit signed *immediate* as signed integers; if GPR *rs* is greater than or equal to *immediate*, then take a Trap exception.**Restrictions:**

None

Operation:

```

if GPR[rs]  $\geq$  sign_extend(immediate) then
    SignalException(Trap)
endif

```

Exceptions:

Trap

31	26 25	21 20	16 15	0
POOL32I 010000	TGEIU 01011	rs	immediate	

6 5 5 16

Format: TGEIU rs, immediate**microMIPS****Purpose:** Trap if Greater or Equal Immediate Unsigned

To compare a GPR to a constant and do a conditional trap

Description: if GPR[rs] \geq immediate then TrapCompare the contents of GPR *rs* and the 16-bit sign-extended *immediate* as unsigned integers; if GPR *rs* is greater than or equal to *immediate*, then take a Trap exception.Because the 16-bit *immediate* is sign-extended before comparison, the instruction can represent the smallest or largest unsigned numbers. The representable values are at the minimum [0, 32767] or maximum [max_unsigned-32767, max_unsigned] end of the unsigned range.**Restrictions:**

None

Operation:

```

if (0 || GPR[rs])  $\geq$  (0 || sign_extend(immediate)) then
    SignalException(Trap)
endif

```

Exceptions:

Trap

31	26 25	21 20	16 15	12 11	6 5	0
POOL32A 000000	rt	rs	code	TGEU 010000	POOL32AXf 111100	6

Format: TGEU rs, rt

microMIPS

Purpose: Trap if Greater or Equal Unsigned

To compare GPRs and do a conditional trap

Description: if GPR[rs] \geq GPR[rt] then TrapCompare the contents of GPR *rs* and GPR *rt* as unsigned integers; if GPR *rs* is greater than or equal to GPR *rt*, then take a Trap exception.The contents of the *code* field are ignored by hardware and may be used to encode information for system software. To retrieve the information, system software must load the instruction word from memory.**Restrictions:**

None

Operation:

```

if (0 || GPR[rs])  $\geq$  (0 || GPR[rt]) then
    SignalException(Trap)
endif

```

Exceptions:

Trap

31	26 25	16 15	6 5	0
POOL32A 000000	0 0000000000	TLBP 0000001101	POOL32AXf 111100	6

Format: TLBP**microMIPS****Purpose:** Probe TLB for Matching Entry

To find a matching entry in the TLB.

Description:

The *Index* register is loaded with the address of the TLB entry whose contents match the contents of the *EntryHi* register. If no TLB entry matches, the high-order bit of the *Index* register is set. In Release 1 of the Architecture, it is implementation dependent whether multiple TLB matches are detected on a TLBP. However, implementations are strongly encouraged to report multiple TLB matches only on a TLB write. In Release 2 of the Architecture, multiple TLB matches may only be reported on a TLB write. In Release 3 of the Architecture, multiple TLB matches may be reported on either TLB write or TLB probe.

Restrictions:

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

Operation:

```

Index ← 1 || UNPREDICTABLE31
for i in 0...TLBEntries-1
    if ((TLB[i]VPN2 and not (TLB[i]Mask) = 
        (EntryHiVPN2 and not (TLB[i]Mask))) and
        (TLB[i]R = EntryHiR) and
        ((TLB[i]G = 1) or (TLB[i]ASID = EntryHiASID)) then
            Index ← i
    endif
endfor

```

Exceptions:

Coprocessor Unusable

Machine Check

31	26 25	16 15	6 5	0
POOL32A 000000	0 0000000000	TLBR 0001001101	POOL32AXf 111100	6

Format: TLBR

microMIPS

Purpose: Read Indexed TLB Entry

To read an entry from the TLB.

Description:

The *EntryHi*, *EntryLo0*, *EntryLo1*, and *PageMask* registers are loaded with the contents of the TLB entry pointed to by the *Index* register. In Release 1 of the Architecture, it is implementation dependent whether multiple TLB matches are detected on a TLBR. However, implementations are strongly encouraged to report multiple TLB matches only on a TLB write. In Release 2 of the Architecture, multiple TLB matches may only be reported on a TLB write. In Release 3 of the Architecture, multiple TLB matches may be detected on a TLBR.

In an implementation supporting TLB entry invalidation ($\text{Config4}_{\text{IE}} = 2$ or $\text{Config4}_{\text{IE}} = 3$), reading an invalidated TLB entry causes 0 to be written to *EntryHi*, *EntryLo0*, *EntryLo1* registers and the *PageMask_{MASK}* register field.

Note that the value written to the *EntryHi*, *EntryLo0*, and *EntryLo1* registers may be different from that originally written to the TLB via these registers in that:

- The value returned in the VPN2 field of the *EntryHi* register may have those bits set to zero corresponding to the one bits in the Mask field of the TLB entry (the least significant bit of VPN2 corresponds to the least significant bit of the Mask field). It is implementation dependent whether these bits are preserved or zeroed after a TLB entry is written and then read.
- The value returned in the PFN field of the *EntryLo0* and *EntryLo1* registers may have those bits set to zero corresponding to the one bits in the Mask field of the TLB entry (the least significant bit of PFN corresponds to the least significant bit of the Mask field). It is implementation dependent whether these bits are preserved or zeroed after a TLB entry is written and then read.
- The value returned in the G bit in both the *EntryLo0* and *EntryLo1* registers comes from the single G bit in the TLB entry. Recall that this bit was set from the logical AND of the two G bits in *EntryLo0* and *EntryLo1* when the TLB was written.

Restrictions:

The operation is **UNDEFINED** if the contents of the Index register are greater than or equal to the number of TLB entries in the processor.

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

Operation:

```
i ← Index
if i > (TLBEntries - 1) then
    UNDEFINED
endif
if ( (Config4IE = 2 or Config4IE = 3) and TLB[i].VPN2_invalid = 1) then
    PagemaskMASK ← 0
    EntryHi ← 0
    EntryLo1 ← 0
    EntryLo0 ← 0
```

```
EntryHiEHINV ← 1
else
    PageMaskMask ← TLB[i]Mask
    EntryHi ← TLB[i]R || 0Fill ||
        (TLB[i]VPN2 and not TLB[i]Mask) || # Masking implem dependent
        05 || TLB[i]ASID
    EntryLo1 ← 0Fill ||
        (TLB[i]PFN1 and not TLB[i]Mask) || # Masking mplem dependent
        TLB[i]C1 || TLB[i]D1 || TLB[i]V1 || TLB[i]G
    EntryLo0 ← 0Fill ||
        (TLB[i]PFN0 and not TLB[i]Mask) || # Masking mplem dependent
        TLB[i]C0 || TLB[i]D0 || TLB[i]V0 || TLB[i]G
endif
```

Exceptions:

Coprocessor Unusable

Machine Check

31	26 25	16 15	6 5	0
POOL32A 000000	0000000000	TLBWI 0010001101	POOL32Ax 111100	6

Format: TLBWI**microMIPS****Purpose:** Write Indexed TLB EntryTo write or invalidate a TLB entry indexed by the *Index* register.**Description:**If $Config4_{IE} < 2$ or $EntryHi_{EHINV}=0$:

The TLB entry pointed to by the Index register is written from the contents of the *EntryHi*, *EntryLo0*, *EntryLo1*, and *PageMask* registers. It is implementation dependent whether multiple TLB matches are detected on a TLBWI. In such an instance, a Machine Check Exception is signaled. In Release 2 of the Architecture, multiple TLB matches may only be reported on a TLB write. The information written to the TLB entry may be different from that in the *EntryHi*, *EntryLo0*, and *EntryLo1* registers, in that:

- The value written to the VPN2 field of the TLB entry may have those bits set to zero corresponding to the one bits in the Mask field of the *PageMask* register (the least significant bit of VPN2 corresponds to the least significant bit of the Mask field). It is implementation dependent whether these bits are preserved or zeroed during a TLB write.
- The value written to the PFN0 and PFN1 fields of the TLB entry may have those bits set to zero corresponding to the one bits in the Mask field of *PageMask* register (the least significant bit of PFN corresponds to the least significant bit of the Mask field). It is implementation dependent whether these bits are preserved or zeroed during a TLB write.
- The single G bit in the TLB entry is set from the logical AND of the G bits in the *EntryLo0* and *EntryLo1* registers.

If $Config4_{IE} > 1$ and $EntryHi_{EHINV}=1$:

The TLB entry pointed to by the Index register has its VPN2 field marked as invalid. This causes the entry to be ignored on TLB matches for memory accesses. No Machine Check is generated.

Restrictions:

The operation is **UNDEFINED** if the contents of the Index register are greater than or equal to the number of TLB entries in the processor.

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

Operation:

```
i ← Index
if (Config4IE = 2 or Config4IE = 3) then
    TLB[i]VPN2_invalid ← 0
    if (EntryHiEHINV=1) then
        TLB[i]VPN2_invalid ← 1
        break
    endif
endif
```

```
TLB[i].Mask ← PageMaskMask
TLB[i]R ← EntryHiR
TLB[i]VPN2 ← EntryHiVPN2 and not PageMaskMask # Implementation dependent
TLB[i]ASID ← EntryHiASID
TLB[i]G ← EntryLo1G and EntryLo0G
TLB[i]PFN1 ← EntryLo1PFN and not PageMaskMask # Implementation dependent
TLB[i]C1 ← EntryLo1C
TLB[i]D1 ← EntryLo1D
TLB[i]V1 ← EntryLo1V
TLB[i]PFN0 ← EntryLo0PFN and not PageMaskMask # Implementation dependent
TLB[i]C0 ← EntryLo0C
TLB[i]D0 ← EntryLo0D
TLB[i]V0 ← EntryLo0V
```

Exceptions:

Coprocessor Unusable

Machine Check

31	26 25	16 15	6 5	0
POOL32A 000000	0000000000	TLBWR 0011001101	POOL32Ax 111100	6

Format: TLBWR**microMIPS****Purpose:** Write Random TLB EntryTo write a TLB entry indexed by the *Random* register.**Description:**

The TLB entry pointed to by the *Random* register is written from the contents of the *EntryHi*, *EntryLo0*, *EntryLo1*, and *PageMask* registers. It is implementation dependent whether multiple TLB matches are detected on a TLBWR. In such an instance, a Machine Check Exception is signaled. In Release 2 of the Architecture, multiple TLB matches may only be reported on a TLB write. The information written to the TLB entry may be different from that in the *EntryHi*, *EntryLo0*, and *EntryLo1* registers, in that:

- The value written to the VPN2 field of the TLB entry may have those bits set to zero corresponding to the one bits in the Mask field of the *PageMask* register (the least significant bit of VPN2 corresponds to the least significant bit of the Mask field). It is implementation dependent whether these bits are preserved or zeroed during a TLB write.
- The value written to the PFN0 and PFN1 fields of the TLB entry may have those bits set to zero corresponding to the one bits in the Mask field of *PageMask* register (the least significant bit of PFN corresponds to the least significant bit of the Mask field). It is implementation dependent whether these bits are preserved or zeroed during a TLB write.
- The single G bit in the TLB entry is set from the logical AND of the G bits in the *EntryLo0* and *EntryLo1* registers.

Restrictions:

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

Operation:

```

i ← Random
if (Config4IE = 2 or Config4IE = 3) then
    TLB[i]VPN2_invalid ← 0
endif
TLB[i]Mask ← PageMaskMask
TLB[i]R ← EntryHiR
TLB[i]VPN2 ← EntryHiVPN2 and not PageMaskMask # Implementation dependent
TLB[i]ASID ← EntryHiASID
TLB[i]G ← EntryLo1G and EntryLo0G
TLB[i]PFN1 ← EntryLo1PFN and not PageMaskMask # Implementation dependent
TLB[i]C1 ← EntryLo1C
TLB[i]D1 ← EntryLo1D
TLB[i]V1 ← EntryLo1V
TLB[i]PFN0 ← EntryLo0PFN and not PageMaskMask # Implementation dependent
TLB[i]C0 ← EntryLo0C
TLB[i]D0 ← EntryLo0D
TLB[i]V0 ← EntryLo0V

```

Exceptions:

Coprocessor Unusable

Machine Check

31	26 25	21 20	16 15	12 11	6 5	0
POOL32A 000000	rt	rs	code	TLT 100000	POOL32AXf 111100	6

Format: TLT rs, rt

microMIPS

Purpose: Trap if Less Than

To compare GPRs and do a conditional trap

Description: if GPR[rs] < GPR[rt] then Trap

Compare the contents of GPR *rs* and GPR *rt* as signed integers; if GPR *rs* is less than GPR *rt*, then take a Trap exception.

The contents of the *code* field are ignored by hardware and may be used to encode information for system software. To retrieve the information, system software must load the instruction word from memory.

Restrictions:

None

Operation:

```
if GPR[rs] < GPR[rt] then
    SignalException(Trap)
endif
```

Exceptions:

Trap

31	26 25	21 20	16 15	0
POOL32I 010000	TLTI 01000	rs	immediate	

6 5 5 16

Format: TLTI rs, immediate**microMIPS****Purpose:** Trap if Less Than Immediate

To compare a GPR to a constant and do a conditional trap

Description: if GPR[rs] < immediate then TrapCompare the contents of GPR *rs* and the 16-bit signed *immediate* as signed integers; if GPR *rs* is less than *immediate*, then take a Trap exception.**Restrictions:**

None

Operation:

```

if GPR[rs] < sign_extend(immediate) then
    SignalException(Trap)
endif

```

Exceptions:

Trap

31	26 25	21 20	16 15	0
6	5	5	16	
POOL32I 010000	TLTIU 01010	rs		immediate

Format: TLTIU rs, immediate**microMIPS****Purpose:** Trap if Less Than Immediate Unsigned

To compare a GPR to a constant and do a conditional trap

Description: if GPR[rs] < immediate then TrapCompare the contents of GPR *rs* and the 16-bit sign-extended *immediate* as unsigned integers; if GPR *rs* is less than *immediate*, then take a Trap exception.Because the 16-bit *immediate* is sign-extended before comparison, the instruction can represent the smallest or largest unsigned numbers. The representable values are at the minimum [0, 32767] or maximum [max_unsigned-32767, max_unsigned] end of the unsigned range.**Restrictions:**

None

Operation:

```
if (0 || GPR[rs]) < (0 || sign_extend(immediate)) then
    SignalException(Trap)
endif
```

Exceptions:

Trap

31	26 25	21 20	16 15	12 11	6 5	0
POOL32A 000000	rt	rs	code	TLTU 101000	POOL32AXf 111100	6

Format: TLTU rs, rt

microMIPS

Purpose: Trap if Less Than Unsigned

To compare GPRs and do a conditional trap

Description: if GPR[rs] < GPR[rt] then Trap

Compare the contents of GPR *rs* and GPR *rt* as unsigned integers; if GPR *rs* is less than GPR *rt*, then take a Trap exception.

The contents of the *code* field are ignored by hardware and may be used to encode information for system software. To retrieve the information, system software must load the instruction word from memory.

Restrictions:

None

Operation:

```
if (0 || GPR[rs]) < (0 || GPR[rt]) then
    SignalException(Trap)
endif
```

Exceptions:

Trap

31	26 25	21 20	16 15	12 11	6 5	0
POOL32A 000000	rt	rs	code	TNE 110000	POOL32AXf 111100	6

Format: TNE rs, rt

microMIPS

Purpose: Trap if Not Equal

To compare GPRs and do a conditional trap

Description: if GPR[rs] ≠ GPR[rt] then TrapCompare the contents of GPR *rs* and GPR *rt* as signed integers; if GPR *rs* is not equal to GPR *rt*, then take a Trap exception.The contents of the *code* field are ignored by hardware and may be used to encode information for system software. To retrieve the information, system software must load the instruction word from memory.**Restrictions:**

None

Operation:

```

if GPR[rs] ≠ GPR[rt] then
    SignalException(Trap)
endif

```

Exceptions:

Trap

31	26 25	21 20	16 15	0
POOL32I 010000	TNEI 01100	rs		immediate

6 5 5 16

Format: TNEI rs, immediate**microMIPS****Purpose:** Trap if Not Equal Immediate

To compare a GPR to a constant and do a conditional trap

Description: if GPR[rs] ≠ immediate then TrapCompare the contents of GPR *rs* and the 16-bit signed *immediate* as signed integers; if GPR *rs* is not equal to *immediate*, then take a Trap exception.**Restrictions:**

None

Operation:

```
if GPR[rs] ≠ sign_extend(immediate) then
    SignalException(Trap)
endif
```

Exceptions:

Trap

31	26 25	22 21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fmt	TRUNC.L 10001100	POOL32FXf 111011

6 5 5 1 1 8 6

Format: TRUNC.L fmt
 TRUNC.L S ft, fs
 TRUNC.L D ft, fs

microMIPS
 microMIPS

Purpose: Floating Point Truncate to Long Fixed Point

To convert an FP value to 64-bit fixed point, rounding toward zero

Description: FPR[ft] \leftarrow convert_and_round(FPR[fs])

The value in FPR fs, in format fmt, is converted to a value in 64-bit long fixed point format and rounded toward zero (rounding mode 1). The result is placed in FPR ft.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{63} to $2^{63}-1$, the result cannot be represented correctly and an IEEE Invalid Operation condition exists. In this case the Invalid Operation flag is set in the FCSR. If the Invalid Operation Enable bit is set in the FCSR, no result is written to ft and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{63}-1$, is written to ft.

Restrictions:

The fields fs and ft must specify valid FPRs; fs for type fmt and fd for long fixed point; if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format fmt; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

The result of this instruction is **UNPREDICTABLE** if the processor is executing in 16 FP registers mode.

Operation:

StoreFPR(ft, L, ConvertFmt(ValueFPR(fs, fmt), fmt, L))

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Unimplemented Operation, Invalid Operation, Inexact

31	26 25	22 21 20	16 15 14 13	6 5	0
POOL32F 010101	ft	fs	0 fm t	TRUNC.W 10101100	POOL32FXf 111011

Format: TRUNC.W(fmt)
 TRUNC.W.S ft, fs
 TRUNC.W.D ft, fs

microMIPS
 microMIPS

Purpose: Floating Point Truncate to Word Fixed Point

To convert an FP value to 32-bit fixed point, rounding toward zero

Description: `FPR[ft] ← convert_and_round(FPR[fs])`

The value in FPR *fs*, in format *fmt*, is converted to a value in 32-bit word fixed point format using rounding toward zero (rounding mode 1). The result is placed in FPR *ft*.

When the source value is Infinity, NaN, or rounds to an integer outside the range -2^{31} to $2^{31}-1$, the result cannot be represented correctly and an IEEE Invalid Operation condition exists. In this case the Invalid Operation flag is set in the *FCSR*. If the Invalid Operation *Enable* bit is set in the *FCSR*, no result is written to *ft* and an Invalid Operation exception is taken immediately. Otherwise, the default result, $2^{31}-1$, is written to *ft*.

Restrictions:

The fields *fs* and *ft* must specify valid FPRs; *fs* for type *fmt* and *fd* for word fixed point; if they are not valid, the result is **UNPREDICTABLE**.

The operand must be a value in format *fmt*; if it is not, the result is **UNPREDICTABLE** and the value of the operand FPR becomes **UNPREDICTABLE**.

Operation:

`StoreFPR(ft, W, ConvertFmt(ValueFPR(fs, fmt), fmt, W))`

Exceptions:

Coprocessor Unusable, Reserved Instruction

Floating Point Exceptions:

Inexact, Invalid Operation, Unimplemented Operation

Enter Standby Mode

WAIT

31	26 25	16 15	6 5	0
POOL32A 000000	Implementation-dependent code	WAIT 1001001101	POOL32AXf 111100	6

Format: WAIT

microMIPS

Purpose: Enter Standby Mode

Wait for Event

Description:

The WAIT instruction performs an implementation-dependent operation, usually involving a lower power mode. Software may use the code bits of the instruction to communicate additional information to the processor, and the processor may use this information as control for the lower power mode. A value of zero for code bits is the default and must be valid in all implementations.

The WAIT instruction is typically implemented by stalling the pipeline at the completion of the instruction and entering a lower power mode. The pipeline is restarted when an external event, such as an interrupt or external request occurs, and execution continues with the instruction following the WAIT instruction. It is implementation-dependent whether the pipeline restarts when a non-enabled interrupt is requested. In this case, software must poll for the cause of the restart. The assertion of any reset or NMI must restart the pipeline and the corresponding exception must be taken.

If the pipeline restarts as the result of an enabled interrupt, that interrupt is taken between the WAIT instruction and the following instruction (EPC for the interrupt points at the instruction following the WAIT instruction).

Restrictions:

The operation of the processor is **UNDEFINED** if a WAIT instruction is placed in the delay slot of a branch or a jump.

If access to Coprocessor 0 is not enabled, a Coprocessor Unusable Exception is signaled.

Operation:

I: Enter implementation dependent lower power mode
I+1:/* Potential interrupt taken here */

Exceptions:

Coprocessor Unusable Exception

Enter Standby Mode

WAIT

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	WRPGPR 1111000101	POOL32AXf 111100	6

Format: WRPGPR rt, rs**microMIPS****Purpose:** Write to GPR in Previous Shadow Set

To move the contents of a current GPR to a GPR in the previous shadow set.

Description: SGPR[SRSCtl_{PSS}, rt] ← GPR[rs]The contents of the current GPR *rs* is moved to the shadow GPR register specified by SRSCtl_{PSS} (signifying the previous shadow set number) and *rt* (specifying the register number within that set).**Restrictions:**

In implementations prior to Release 2 of the Architecture, this instruction resulted in a Reserved Instruction Exception.

Operation:SGPR[SRSCtl_{PSS}, rt] ← GPR[rs]**Exceptions:**

Coprocessor Unusable

Reserved Instruction

31	26 25	21 20	16 15	6 5	0
POOL32A 000000	rt	rs	WSBH 0111101100	POOL32AXf 111100	6

Format: WSBH rt, rs**microMIPS****Purpose:** Word Swap Bytes Within Halfwords

To swap the bytes within each halfword of GPR rs and store the value into GPR rt.

Description: $\text{GPR}[rt] \leftarrow \text{SwapBytesWithinHalfwords}(\text{GPR}[rs])$

Within each halfword of the lower word of GPR rs the bytes are swapped, the result is sign-extended, and stored in GPR rt.

Restrictions:

In implementations prior to Release 2 of the architecture, this instruction resulted in a Reserved Instruction Exception.

If GPR rs does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.**Operation:**

```

if NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
GPR[rt] ← sign_extend(GPR[rs]23..16 || GPR[rs]31..24 || GPR[rs]7..0 || GPR[rs]15..8)

```

Exceptions:

Reserved Instruction

Programming Notes:

The WSBH instruction can be used to convert halfword and word data of one endianness to another endianness. The endianness of a word value can be converted using the following sequence:

```

lw      t0, 0(a1)          /* Read word value */
wsbh   t0, t0              /* Convert endianness of the halfwords */
rotr   t0, t0, 16          /* Swap the halfwords within the words */

```

Combined with SEH and SRA, two contiguous halfwords can be loaded from memory, have their endianness converted, and be sign-extended into two word values in four instructions. For example:

```

lw      t0, 0(a1)          /* Read two contiguous halfwords */
wsbh   t0, t0              /* Convert endianness of the halfwords */
seh    t1, t0              /* t1 = lower halfword sign-extended to word */
sra    t0, t0, 16          /* t0 = upper halfword sign-extended to word */

```

Zero-extended words can be created by changing the SEH and SRA instructions to ANDI and SRL instructions, respectively.

31	26 25	21 20	16 15	11 10 9	0
POOL32A 000000	rt	rs	rd	0	XOR 1100010000

Format: XOR rd, rs, rt

microMIPS

Purpose: Exclusive OR

To do a bitwise logical Exclusive OR

Description: $GPR[rd] \leftarrow GPR[rs] \text{ XOR } GPR[rt]$

Combine the contents of GPR *rs* and GPR *rt* in a bitwise logical Exclusive OR operation and place the result into GPR *rd*.

Restrictions:

None

Operation:

$GPR[rd] \leftarrow GPR[rs] \text{ xor } GPR[rt]$

Exceptions:

None

31	26 25	21 20	16 15	0
XORI32 011100	rt	rs	immediate	

6 5 5 16

Format: XORI rt, rs, immediate**microMIPS****Purpose:** Exclusive OR Immediate

To do a bitwise logical Exclusive OR with a constant

Description: GPR[rt] \leftarrow GPR[rs] XOR immediateCombine the contents of GPR rs and the 16-bit zero-extended *immediate* in a bitwise logical Exclusive OR operation and place the result into GPR rt.**Restrictions:**

None

Operation:GPR[rt] \leftarrow GPR[rs] xor zero_extend(immediate)**Exceptions:**

None

Opcode Map

This chapter defines the bit-level encoding of all microMIPS64 instructions, using a series of opcode tables. The basic format of the tables is shown in [Figure 6.1](#). The topmost row contains the high-order opcode bits (in the example table shown here, bits 31..29), and the leftmost column of the table lists the next most-significant bits of the opcode field (bits 28..26). Decimal and binary values are shown for both rows and columns.

An instruction's encoding is the value at the intersection of a row and column. For example, the opcode value for the instruction EX1 is 33 (decimal) or 011011 (binary). Similarly, the *opcode* value for EX2 is 64 (decimal), or 110100 (binary).

Figure 6.1 Sample Bit Encoding Table

The diagram illustrates the bit-level encoding of microMIPS64 instructions. At the top, a horizontal bar represents the 32-bit instruction word with bit ranges 31 to 0. Below it, a vertical stack of boxes shows the bit fields: 'opcode' (6 bits), 'rs' (5 bits), 'rt' (5 bits), and 'immediate' (16 bits). Arrows point from the 'opcode' field to a 6x8 grid table. The table has 'MSB..MSB-2' in the first column and 'MSB-3..MSB-5' in the second column. The first seven rows are labeled 0 through 6, and the eighth row is labeled 7. The first seven columns are labeled 0 through 6, and the eighth column is labeled 7. Annotations explain the mapping: 'Binary encoding of opcode (31..29)' points to the first row of the grid; 'Decimal encoding of opcode (31..29)' points to the first column of the grid; 'Binary encoding of opcode (28..26)' points to the eighth row of the grid; and 'Decimal encoding of opcode (28..26)' points to the eighth column of the grid. Specific entries in the grid are labeled: 'EX1' is at row 3, column 4 (decimal 33, binary 011011); 'EX2' is at row 6, column 5 (decimal 64, binary 110100).

		31	26 25	21 20	16 15	0			
		opcode	rs	rt	immediate				
		6	5	5	16				
opcode		000	001	010	011	100	101	110	111
MSB-3.. MSB-5	0	000							
1	001								
2	010								
3	011								EX1
4	100								
5	101								
6	110								EX2
7	111								

6.1 Major Opcodes

[Table 6.2](#) defines the major opcode for each instruction. The symbols used in the table are described in [Table 6.1](#).

Every major opcode name starting with “POOL” requires a minor opcode, as defined in Section 6.2 “Minor Opcodes”. All other major opcodes refer to a particular instruction.

In the opcode tables, MSB denotes either bit 15 or 31 , depending on instruction size.

Table 6.1 Symbols Used in the Instruction Encoding Tables

Symbol	Meaning
*	Operation or field codes marked with this symbol are reserved for future use. Executing such an instruction must cause a Reserved Instruction Exception.
δ	(Also <i>italic</i> field name.) Operation or field codes marked with this symbol denotes a field class. The instruction word must be further decoded by examining additional tables that show values for another instruction field.
β	Operation or field codes marked with this symbol represent a valid encoding for a higher-order MIPS ISA level or a new revision of the Architecture. Executing such an instruction must cause a Reserved Instruction Exception.
\perp	Operation or field codes marked with this symbol represent instructions which are not legal if the processor is configured to be backward compatible with MIPS32 processors. If the processor is executing with 64-bit operations enabled, execution proceeds normally. In other cases, executing such an instruction must cause a Reserved Instruction Exception (non-coprocessor encodings or coprocessor instruction encodings for a coprocessor to which access is allowed) or a Coprocessor Unusable Exception (coprocessor instruction encodings for a coprocessor to which access is not allowed).
∇	Operation or field codes marked with this symbol represent instructions which were only legal if 64-bit operations were enabled on implementations of Release 1 of the Architecture. In Release 2 of the architecture, operation or field codes marked with this symbol represent instructions which are legal if 64-bit floating point operations are enabled. In other cases, executing such an instruction must cause a Reserved Instruction Exception (non-coprocessor encodings or coprocessor instruction encodings for a coprocessor to which access is allowed) or a Coprocessor Unusable Exception (coprocessor instruction encodings for a coprocessor to which access is not allowed).
θ	Operation or field codes marked with this symbol are available to licensed MIPS partners. To avoid multiple conflicting instruction definitions, MIPS Technologies will assist the partner in selecting appropriate encodings if requested by the partner. The partner is not required to consult with MIPS Technologies when one of these encodings is used. If no instruction is encoded with this value, executing such an instruction must cause a Reserved Instruction Exception (<i>SPECIAL2</i> encodings or coprocessor instruction encodings for a coprocessor to which access is allowed) or a Coprocessor Unusable Exception (coprocessor instruction encodings for a coprocessor to which access is not allowed).
σ	Field codes marked with this symbol represent an EJTAG support instruction and implementation of this encoding is optional for each implementation. If the encoding is not implemented, executing such an instruction must cause a Reserved Instruction Exception. If the encoding is implemented, it must match the instruction encoding as shown in the table.
ϵ	Operation or field codes marked with this symbol are reserved for MIPS Application-Specific Extensions. If the ASE is not implemented, executing such an instruction must cause a Reserved Instruction Exception.

Table 6.2 microMIPS64 Encoding of Major Opcode Field

Major		MSB..MSB-2							
		0	1	2	3	4	5	6	7
MSB-3.. MSB-5		000	001	010	011	100	101	110	111
0	000	POOL32A δ	POOL32B δ	POOL32I δ	POOL32C δ	*	*	*	*
1	001	POOL16A δ	POOL16B δ	POOL16C δ	LWGP16	POOL16F	*	*	*
2	010	LBU16	LHU16	LWSP16	LW16	SB16	SH16	SWSP16	SW16
3	011	MOVE16	ANDI16	POOL16D δ	POOL16E δ	BEQZ16	BNEZ16	B16	LI16
4	100	ADDI32	ADDIU32	ORI32	XORI32	SLTI32	SLTIU32	ANDI32	JALX32
5	101	LBU32	LHU32	POOL32F δ	JALS32	BEQ32	BNE32	J32	JAL32
6	110	SB32	SH32	POOL32S δ	ADDIUPC	SWC132	SDC132	SD32 ⊥	SW32
7	111	LB32	LH32	DADDIU32 ⊥	*	LWC132	LDC132	LD32 ⊥	LW32

Examples:

1. The 32-bit instruction LW32 is assigned to the major opcode LW32 with the encoding “111111”.
2. The 16-bit instruction SUBU16 is assigned to the major opcode POOL16A with the encoding “000001”.

6.2 Minor Opcodes

While major opcodes have a fixed length of 6 bits, minor opcodes are variable in length. The minor opcodes are defined by opcode tables of one, two, or three dimensions, depending on the size of the opcode. Minor opcodes less than four bits are represented in a one-dimensional table (see [Table 6.15](#)), from four to six bits in a two-dimensional table (shown in [Figure 6.1](#) and [Table 6.9](#)), and from 7 to 10 bits in a three-dimensional table ([Table 6.4](#)). In a three-dimensional table, the two-dimensional table is expanded to include a column on the right side that encodes the extra bits. In the case of minor opcodes requiring multiple table cells, the instruction name appears in all cells, but the additional entries have a black background to indicate that this opcode is blocked (see [Table 6.4](#) and the legend shown in [Table 6.3](#)).

Example:

```
SRL r1, r1, 7      binary opcode fields: 000000 00001 00001 00111 00001 000000
                           interpretation:     POOL32A   r1    r1    7      SRL
                           hex representation: 0021 3840
```

All minor opcode fields are right-aligned except those in 16-bit instructions and in 32-bit instructions with a 16-bit immediate field. These left-aligned fields are defined in a bit-reverse order, which is why, in order to accomodate the variable length of the field to the right, a given row and column in POOL32I represents bit 20..22 and 23..25 instead of bit 22..20 and 25..23.

If table entries are marked grey, then not all available bits of the instruction have been used for the encoding, leaving a field of empty bits. The empty bits are shown in the instruction tables in [Chapter 5, “microMIPS Re-encoded Instructions” on page 50](#).

Table 6.3 Legend for Minor Opcode Tables

Symbol	Meaning
OPCODE	Occupied by Opcode
OPCODE	Space Utilized by another Opcode

Table 6.4 POOL32A Encoding of Minor Opcode Field

Minor	bit 5..3								bit 9..6	
bit 2..0	0	1	2	3	4	5	6	7		
	000	001	010	011	100	101	110	111		
0 000	SLL32	*	SLLV	MOVN	*	*	*	*	0000	0
0 000	SRL32	*	SRLV	MOVZ	*	*	*	*	0001	1
0 000	SRA	*	SRAV	*	*	*	*	*	0010	2
0 000	ROTR	*	ROTRV	*	*	*	*	*	0011	3
0 000	*	*	ADD	LWXS	*	*	*	*	0100	4
0 000	*	*	ADDU32	*	*	*	*	*	0101	5
0 000	*	*	SUB	*	*	*	*	*	0110	6
0 000	*	*	SUBU32	*	*	*	*	*	0111	7
0 000	*	*	MUL	*	*	*	*	*	1000	8
0 000	*	*	AND	*	*	*	*	*	1001	9
0 000	*	*	OR32	*	*	*	*	*	1010	a
0 000	*	*	NOR	*	*	*	*	*	1011	b
0 000	*	*	XOR32	*	*	*	*	*	1100	c
0 000	*	*	SLT	*	*	*	*	*	1101	d
0 000	*	*	SLTU	*	*	*	*	*	1110	e
0 000	*	*	*	*	*	*	*	*	1111	f
1 001	SPECIAL2 0	SPECIAL2 0	*							
2 010	COP2 0	COP2 0								
3 011	UDI 0	UDI 0								
4 100	*	INS	*	*	*	EXT	*	POOL32Ax δ		
5 101	ϵ	ϵ								
6 110	ϵ	ϵ								
7 111	BREAK32	*	*	*	ϵ	*	*	*	*	

Not Shown

SLL r0, r0, r0 = NOP
 SLL r0, r0, 1 = SSNOP
 SLL r0, r0, 3 = EHB
 SLL, r0, r0, 5 = PAUSE

Opcode Map

Table 6.5 POOL32Ax_f Encoding of Minor Opcode Extension Field

Extension	bit 11..9							
bit 8..6	0	1	2	3	4	5	6	7
	000	001	010	011	100	101	110	111
0	000	TEQ	TGE	TGEU	*	TLT	TLTU	TNE
1	001	ε	ε	*	ε	ε	ε	*
2	010	ε	ε	ε	ε	ε	ε	ε
3	011	MFC0	MTC0	*	*	MFC0	MTC0	
bit15..12								
4	100	ε	ε	*	*	*	*	JALR / JR
4	100	ε	ε	*	*	*	*	JALR.HB
4	100	ε	*	*	*	*	SEB	*
4	100	ε	*	*	*	*	SEH	*
4	100	ε	*	*	*	*	CLO	MFC2
4	100	ε	*	*	*	*	CLZ	MTC2
4	100	ε	*	*	*	*	RDHWR	DMFC2
4	100	ε	ε	*	*	*	WSBH	DMTC2
4	100		*	*	*	*	MULT	MFHC2
4	100	ε	ε	*	*	*	MULTU	MTHC2
4	100		*	*	*	*	DIV	*
4	100	ε	ε	*	*	*	DIVU	*
4	100	*	*	*	*	*	MADD	CFC2
4	100	ε	ε	*	*	*	MADDU	CTC2
4	100	*	*	*	*	*	MSUB	*
4	100	ε	*	*	*	*	MSUBU	*
bit15..12								
5	101	*	TLBP	ε	*	*	*	MFHI32
5	101	*	TLBR	ε	*	*	*	MFLO32
5	101	*	TLBWI	ε	*	*	*	MTHI
5	101	*	TLBWR	ε	*	*	*	MTLO
5	101	*	*	*	DI	*	*	*
5	101	*	*	*	EI	*	*	*
5	101	*	*	*	*	*	SYNC	*
5	101	*	*	*	*	*	SYSCALL	*

Table 6.5 POOL32Ax_f Encoding of Minor Opcode Extension Field (Continued)

5	101	*	WAIT	*	*	*	*	*	*	1001	9
5	101	*	*	*	*	*	*	*	*	1010	a
5	101	*	*	*	*	*	*	*	*	1011	b
5	101	*	*	*	*	*	*	*	*	1100	c
5	101	*	ε	*	*	*	SDBBP	*	*	1101	d
5	101	RDPGPR	DERET	*	*	*	*	*	*	1110	e
5	101	WRPGPR	ERET	*	*	*	*	*	*	1111	f

6	110	ε	ε	*	*	ε	*	*	*	*	*
---	-----	---	---	---	---	---	---	---	---	---	---

7	111	ε	ε	ε	*	*	*	*	*	*	*
---	-----	---	---	---	---	---	---	---	---	---	---

Not Shown: JR = JALR r0

Table 6.6 POOL32F Encoding of Minor Opcode Field

Minor	bit 5..3								bit 8..6		
	0	1	2	3	4	5	6	7			
	000	001	010	011	100	101	110	111			
0	000	*	*	*	ε	MOVF.fmt	*	ADD.fmt	MOVN.fmt	000	0
0	000	*	LWXC1	*	ε	MOVT.fmt	*	SUB.fmt	MOVZ.fmt	001	1
0	000	PLL.PS ▽	SWXC1	*	ε	*	*	MUL.fmt	*	010	2
0	000	PLU.PS ▽	LDXC1	*	ε	*	*	DIV.fmt	*	011	3
0	000	PUL.PS ▽	SDXC1	*		*	*	ADD.fmt	MOVN.fmt	100	4
0	000	PUU.PS ▽	LUXC1	*		*	*	SUB.fmt	MOVZ.fmt	101	5
0	000	CVT.PS.S ▽	SUXC1	*	*	PREFIX	*	MUL.fmt	*	110	6
0	000	*	*	*	*	*	*	DIV.fmt	*	111	7
1	001	MADD.S	MADD.D	MADD.PS ▽	ALNV.PS ▽	MSUB.S	MSUB.D	MSUB.PS ▽	*		
2	010	NMADD.S	NMADD.D	NMADD.PS ▽	*	NMSUB.S	NMSUB.D	NMSUB.PS ▽	*		
3	011	*	*	*	*	*	*	*	*	POOL32Fx _f δ	
4	100	*	*	*	ε	*	*	*	*	C.cond.fmt	
5	011	*	*	*	*	*	*	*	*		
6	100	*	*	*	*	*	*	*	*		
7	100	*	*	*	*	*	*	*	*		

Opcode Map

Table 6.7 POOL32Fx Encoding of Minor Opcode Extension Field

Extension	bit 10..8									
bit 7..6	0	1	2	3	4	5	6	7		
	000	001	010	011	100	101	110	111		
0 00	*	CVT.L(fmt) ∇	RSQRT(fmt)	FLOOR.L(fmt) ∇	*	*	*	ϵ	000	0
0 00	*	CVT.W(fmt)	SQRT(fmt)	FLOOR.W(fmt)	*	*	*	ϵ	001	1
0 00	CFC1	*	RECIP(fmt)	CEIL.L(fmt) ∇	*	*	*	*	010	2
0 00	CTC1	*	*	CEIL.W(fmt)	*	*	*	*	011	3
0 00	MFC1	CVT.S.PL ∇	*	TRUNC.L(fmt) ∇	DMFC1	*		*	100	4
0 00	MTC1	CVT.S.PU ∇	*	TRUNC.W(fmt)	DMTC1	*	*	*	101	5
0 00	MFHC1 ∇	*	*	ROUND.L(fmt) ∇		*	*	*	110	6
0 00	MTHC1 ∇	*	*	ROUND.W(fmt)	*	*	*	*	111	7
bit 13..11										
1 01	MOV(fmt)	MOVF	*	ABS(fmt)	*	*	*	ϵ	00	0
1 01	*	MOVT	*	NEG(fmt)	*	*	*	*	01	1
1 01	*	*	*	CVT.D(fmt)	*	*	*	ϵ	10	2
1 01	*	*	*	CVT.S(fmt)	*	*	*	*	11	3
*										
2 10	*	*	*	*	*	*	*	*	*	*
3 11	*	*	*	*	*	*	*	*	*	*

Table 6.8 POOL32B Encoding of Minor Opcode Field

Minor	bit 15	
	0	1
bit 14..12	0	1
0 000	LWC2	SWC2
1 001	LWP	SWP
2 010	LDC2 \perp	SDC2 \perp
3 011	ϵ	ϵ
4 100	LDP \perp	SDP \perp
5 101	LWM32	SWM32
6 110	CACHE	*
7 111	LDM \perp	SDM \perp

Table 6.9 POOL32C Encoding of Minor Opcode Field

Minor		bit 15	
		0	1
		0	1
0	000	LWL	SWL
1	001	LWR	SWR
2	010	PREF	ST-EVA δ
3	011	LL	SC
4	100	LDL	SDL
5	101	LDR	SDR
6	110	LD-EVA δ	LWU
7	111	LLD	SCD

Table 6.10 LD-EVA Encoding of Minor Opcode Field

Minor		
bit 11..9		
0	000	LBUE
1	001	LHUE
2	010	LWLE
3	011	LWRE
4	100	LBE
5	101	LHE
6	110	LLE
7	111	LWE

Table 6.11 ST-EVA Encoding of Minor Opcode Field

Minor		
bit 11..9		
0	000	SWLE
1	001	SWRE
2	010	PREFE
3	011	CACHEE
4	100	SBE
5	101	SHE
6	110	SCE
7	111	SWE

Opcode Map

Table 6.12 POOL32I Encoding of Minor Opcode Field

Minor	bit 22..21			
	0	1	2	3
bit 25..23	00	01	10	11
0 000	BLTZ	BLTZAL	BGEZ	BGEZAL
1 001	BLEZ	BNEZC	BGTZ	BEQZC
2 010	TLTI	TGEI	TLTIU	TGEIU
3 011	TNEI	LUI	TEQI	*
4 100	SYNCI	BLTZALS	*	BGEZALS
5 101	BC2F	BC2T	*	*
6 110	*	*	ϵ	ϵ
bit 16				
7 111	BC1F	BC1T	*	*
7 111	ϵ	ϵ	ϵ	ϵ
7 111	0			

Table 6.13 POOL32S Encoding of Minor Opcode Field

Minor	bit 5..3							
	0	1	2	3	4	5	6	7
bit 2..0	000	001	010	011	100	101	110	111
bit 8..6								
0 000	DSLL	DSLL32	DSLLV	*	*	*	*	000 0
0 000	DSRL	DSRL32	DSRLV	*	*	*	*	001 1
0 000	DSRA	DSRA32	DSRAV	*	*	*	*	010 2
0 000	DROTR	DROTR32	DROTRV	*	*	*	*	011 3
0 000	*	*	DADD	*	*	*	*	100 4
0 000	*	*	DADDU	*	*	*	*	101 5
0 000	*	*	DSUB	*	*	*	*	110 6
0 000	*	*	DSUBU	*	*	*	*	111 7
1 001	ϵ							

Table 6.13 POOL32S Encoding of Minor Opcode Field (Continued)

2	010	ε	ε	ε	ε	ε	ε	ε	ε
3	011	*	*	ε	ε	ε	ε	ε	ε
4	100	DINSM	DINS	DEXTU	DADDI	DEXTM	DEXT	DINSU	POOL32Sxf δ
5	101	ε	ε	ε	ε	ε	*	ε	ε
6	110	*	*	*	*	*	*	*	*
7	111	*	*	*	*	*	*	*	*

Table 6.14 POOL32Sxf Encoding of Minor Opcode Extension Field

Extension	bit 11..9								
bit 8..6	0	1	2	3	4	5	6	7	
	000	001	010	011	100	101	110	111	
0	000	*	*	*	*	ε	ε	ε	
1	001	*	ε	ε	ε	ε	ε	ε	
2	010	ε	ε	ε	ε	ε	ε	ε	
3	011	DMFC0	DMTC0	*	*	DMFC0	DMTC0	*	*
bit 15..12									
4	100	ε	ε	*	*	*	*	*	0000 0
4	100	ε	ε	*	*	*	*	*	0001 1
4	100	ε	ε	*	*	*	*	*	0010 2
4	100	*	*	*	*	*	*	*	0011 3
4	100	ε	*	*	*	*	DCLO	*	0100 4
4	100	ε	ε	ε	*	*	DCLZ	*	0101 5
4	100	ε	ε	ε	*	*	*	*	0110 6
4	100	ε	ε	*	*	*	DSBH	*	0111 7
4	100	*	*	*	*	*	DMULT	*	1000 8
4	100	ε	ε	*	*	*	DMULTU	*	1001 9
4	100	*	*	*	*	*	DDIV	*	1010 a

Opcode Map

Table 6.14 POOL32Sxf Encoding of Minor Opcode Extension Field (Continued)

4	100	ϵ	ϵ	*	*	*	DDIVU	*	*	1011	b
4	100	*	*	*	*	*	*	*	*	1100	c
4	100	ϵ	ϵ	*	*	*	*	*	*	1101	d
4	100	*	*	*	*	*	*	*	*	1110	e
4	100	ϵ	*	*	*	*	DSHD	*	*	1111	f
5	101	*	*	*	*	*	*	*	*		
6	110	ϵ	ϵ	*	*	*	*	*	*		
7	111	ϵ	ϵ	ϵ	ϵ	*	*	*	*		

Table 6.15 POOL16A Encoding of Minor Opcode Field

Minor	
<i>bit 0</i>	
0	ADDU16
1	SUBU16

Table 6.16 POOL16B Encoding of Minor Opcode Field

Minor	
<i>bit 0</i>	
0	SLL16
1	SRL16

Table 6.17 POOL16C Encoding of Minor Opcode Field

Minor		bit 6..4							
bit 9..7	0	1	2	3	4	5	6	7	
	000	001	010	011	100	101	110	111	
0	000	NOT16	NOT16	NOT16	NOT16	XOR16	XOR16	XOR16	XOR16
1	001	AND16	AND16	AND16	AND16	OR16	OR16	OR16	OR16

Table 6.17 POOL16C Encoding of Minor Opcode Field

2	010	LWM16	LWM16	LWM16	LWM16	SWM16	SWM16	SWM16	SWM16
3	011	JR16	JR16	JRC	JRC	JALR16	JALR16	JALRS16	JALRS16
4	100	MFHI16	MFHI16	*	*	MFLO16	MFLO16	*	*
5	101	BREAK16	*	*	*	SDBBP16 σ	*	*	*
6	110	JRADDIUSP	JRADDIUSP	*	*	*	*	*	*
7	111	*	*	*	*	*	*	*	*

Table 6.18 POOL16D Encoding of Minor Opcode Field

Minor	
<i>bit 0</i>	
0	ADDIUS5
1	ADDIUSP

Table 6.19 POOL16E Encoding of Minor Opcode Field

Minor	
<i>bit 0</i>	
0	ADDIUR2
1	ADDIUR1SP

Table 6.20 POOL16F Encoding of Minor Opcode Field

Minor	
<i>bit 0</i>	
0	MOVEP
1	*

6.3 Floating Point Unit Instruction Format Encodings

Instruction format encodings for the floating point unit are presented in this section.

Opcode Map

If the instruction allows Single, Double and Pair-Single formats, the following encoding is used:

Table 6.21 Floating Point Unit Format Encodings - S, D, PS

<i>fmt field</i>		Mnemonic	Name	Bit Width	Data Type
Decimal	Hex				
0	0	S	Single	32	Floating Point
1	1	D	Double	64	Floating Point
2	2	PS	Paired Single	2 × 32	Floating Point
3	3	Reserved for future use by the architecture.			

If the instruction only allows Single and Double formats, the following encoding is used:

Table 6.22 Floating Point Unit Format Encodings - S, D 1-bit

<i>fmt field</i>		Mnemonic	Name	Bit Width	Data Type
Decimal	Hex				
0	0	S	Single	32	Floating Point
1	1	D	Double	64	Floating Point

Table 6.23 Floating Point Unit Instruction Format Encodings - S, D 2-bits

<i>fmt field</i>		Mnemonic	Name	Bit Width	Data Type
Decimal	Hex				
0	0	S	Single	32	Floating Point
1	1	D	Double	64	Floating Point
2, 3	2, 3	Reserved for future use by the architecture.			

6.3 Floating Point Unit Instruction Format Encodings

If the instruction allows Single, Word and Long formats, the following encoding is used:

Table 6.24 Floating Point Unit Format Encodings - S, W, L

fmt field		Mnemonic	Name	Bit Width	Data Type
Decimal	Hex				
0	0	S	Single	32	Floating Point
1	1	W	Word	32	Integer
2	2	L	Long	64	Integer
3	3	Reserved for future use by the architecture.			

If the instruction allows Double, Word and Long formats, the following encoding is used:.

Table 6.25 Floating Point Unit Format Encodings - D, W, L

fmt field		Mnemonic	Name	Bit Width	Data Type
Decimal	Hex				
0	0	D	Double	64	Floating Point
1	1	W	Word	32	Integer
2	2	L	Long	64	Integer
3	3	Reserved for future use by the architecture.			

Compatibility

This chapter covers various aspects of compatibility. microMIPS64 is the preferred replacement for the existing MIPS16e ASE and uses the same mode-switch mechanism. Although microMIPS includes almost all MIPS64 instructions and therefore does not require the original MIPS64 encodings, initially it will be implemented together with MIPS64-encoded instruction execution.

7.1 Assembly-Level Compatibility

microMIPS64 includes a re-encoding of the MIPS64 instructions, including all ASEs and UDI space. Therefore, microMIPS provides assembly-level compatibility. Only the following cases cause some side effects:

- **Re-encoded MIPS64 instructions with reduced operand fields**

There are 3 classes of reduced fields:

1. *Reserved or unsupported bits and encodings.* This category is not a problem because utilizing a reserved or unsupported field causes an exception, no operation, or undefined behavior, and often these cannot be accessed by the compiler anyway. An example of this category is the ‘fmt’ field.
2. *Bit fields and ranges which are defined but typically never used.* This category is usually not a problem. The assembler generates an error message if a constant is outside of the re-defined range.
3. *Bit fields which are used but were reduced in order to utilize the new opcode map most efficiently.* The handling of these cases is similar to category 2 above—compilers do not generate such scenarios, and assemblers generate error messages. In the latter case, the programmer has to either fix the code or switch to the MIPS64 encoding.

- **Re-encoded Branch and Jump instructions**

Branch instructions support 16-bit aligned branch target addresses, providing full flexibility for microMIPS. Because the offset field size of the 32-bit encoded branch instructions is the same as the MIPS64-encoded instructions, and because all branch target addresses of the MIPS64 encoding are 32-bit aligned, the branch range in microMIPS is smaller. This is partially compensated by the smaller code size of microMIPS.

Jump instructions also support 16-bit aligned target addresses. This reduces the addressable target region for J, JAL to 128 MB instead of 256 MB. For these instructions, the effective target address is in the ‘current’ 128 MB-aligned region. For larger ranges, the jump register instructions (JR, JRC, and JRADDIUSP) can be used.

- **MIPS64 assembly instructions manually encoded using the .WORD directive**

Manual encoding of MIPS64 assembly instructions can be used in assembly code as well as assembly macros in C functions. To differentiate between microMIPS-encoded instructions and other encoded instructions or data, the following compiler directives have been introduced:

```
.set micromips ; instruction stream is microMIPS
.set nomicromips ; instruction stream is MIPS64
.insn          ; If in microMIPS instruction stream mode, the location associated
; with the previous label is aligned to 16-bit bits instead of
; 32-bits
; If in microMIPS instruction stream mode and if the previous
; label is loaded to a register as the target of a jump or branch,
; the ISAMode bit is set within the branch/jump register value.
```

The programmer must use these directives to encode instructions in microMIPS.

For example, to manually encode a microMIPS NOP:

```
.set micromips
label1:
.insn
.word 0      ; label1 location - represents microMIPS NOP32 instruction
label2:
.insn
.half 0x0c00 ; label2 location - represents microMIPS NOP16 instruction
label3:
.half 0x0c00 ; label3 location - represents data value of 3072 (decimal)
```

To manually encode a MIPS64 NOP:

```
.set nomicromips
.word 0      ; represents MIPS64 NOP instruction
```

For MIPS64 instruction stream mode, the “.insn” directive has no effect.

- **Branch likely instructions**

microMIPS does not support branch likely instructions in hardware. Assembly-level compatibility is maintained because assemblers replace branch likely instructions either by an instruction sequence or by a regular branch instruction, and they perform some instruction reordering if reordering is possible.

7.2 ABI Compatibility

microMIPS is compatible with the existing ABIs o32, n32, and n64 calling conventions. However, a few new relocation types need to be added to these ABIs for microMIPS support, as some of the additional offset field sizes required for microMIPS become visible to the linker. For example, the offset fields of J and SW using GP are visible to the linker, while B and SWSP are hidden within the object files.

Functions remain 32-bit aligned as in the MIPS64 encoding as well as MIPS16e. This guarantees that static and dynamic linking processes can link microMIPS object files with MIPS64 object files.

Compatibility

Programs can be composed of both microMIPS and MIPS64 modules, using either the JALX instructions (and/or JR instructions with setting the ISAMode bit appropriately) to switch instruction set modes when calling routines compiled in an ISA different from that of the caller routine.

microMIPS provides flexibility for potential future ABIs.

7.3 Branch and Jump Offsets

microMIPS branch targets are half-word (16-bit) aligned to match half-word sized instructions. Please refer to [Section 3.6, "Branch and Jump Offsets."](#)

7.4 Relocation Types

Compiler and linker toolchains need to be modified with new relocation types to support microMIPS. Reasons for these new relocation types include:

1. The placement of instruction halfwords is determined by memory endian-ness. MIPS64 instructions are always of word size, so there were no halfword placement issues.
2. microMIPS has 7-bit, 10-bit and 16-bit PC-relative offsets.
3. Branch and Jump offset fields are left-shifted by 1 bit (instead of 2 bits in MIPS64) to create effective target addresses.
4. Some code-size optimizations can only be done at link time instead of compile time. Some new relocation types are used solely within the linker to keep track of address and data information.

7.5 Boot-up Code shared between microMIPS64 and MIPS64

In some systems, it would be advantageous to place both microMIPS64 and MIPS64 executables in the same boot memory. In that way, a single system could be used for either instruction set.

To enable this, a binary code sequence is required that can be run in either instruction set and change code paths depending on the instruction set that is being used.

The following binary sequence achieves this goal:

```
0x1000wxyz // where w,x,y,z represent hexadecimal digits  
0x00000000
```

For the MIPS64 instruction set, this binary sequence is interpreted as:

```
BEQ $0, $0, wxyz // branch to location of more MIPS64 instructions  
NOP
```

For the microMIPS instruction set, this binary sequence is interpreted as:

```
ADDI32 $0, $0, wxyz // do nothing  
NOP // fall through to more microMIPS instructions
```

7.6 Coprocessor Unusable Behavior

When a coprocessor instruction is executed when the associated coprocessor has not been implemented, it is allowed for the RI exception to be signalled instead of the Coprocessor Unsuable exception. Please refer to [Section 3.7, "Coprocessor Unusable Behavior."](#)

7.7 Other Issues Affecting Software and Compatibility

microMIPS instructions can cross cache lines and page boundaries. Hardware must handle these cases so that software need not avoid them. Since MIPS64 requires instructions to be 32-bit aligned, there is no forward compatibility issue when transitioning to microMIPS.

References

This appendix lists other documents available from MIPS Technologies, Inc. that are referenced elsewhere in this document. These documents may be included in the \$MIPS_HOME/\$MIPS_CORE/doc area of a typical *Core-Name* soft or hard core release, or in some cases may be available on the MIPS web site, <http://www.mips.com>.

1. MIPS® Architecture For Programmers, Volume I: Introduction to the MIPS64® Architecture
MIPS document: MD0083
2. MIPS® Architecture For Programmers, Volume II: The MIPS64® Instruction Set
MIPS document: MD0087
3. MIPS® Architecture For Programmers, Volume III: The MIPS64® and microMIPS64™ Privileged Resource Architecture
MIPS document: MD0087

Revision History

Change bars (vertical lines) in the margins of this document indicate significant changes in the document since its last release. Change bars are removed for changes that are more than one revision old.

This document may refer to Architecture specifications (for example, instruction set descriptions and EJTAG register definitions), and change bars in these sections indicate changes since the previous version of the relevant Architecture document.

Revision	Date	Description
1.08	November 25, 2009	<ul style="list-style-type: none"> Clean-up for external release.
1.09	January 7, 2010	<ul style="list-style-type: none"> Added shared boot-up code sequence in Compatibility Chapter.
3.00	March 25, 2010	<ul style="list-style-type: none"> Changed document revision numbering to match other Release 3 documents. Hopefully this will be less confusing. Moved MIPS32/64 version of JALX to Volume II-A.
3.01	October 30, 2010	<ul style="list-style-type: none"> User mode instructions not allowed to produce UNDEFINED results. Updated copyright page. Removed Margin Note - "Preliminary - Subject to Change" in some chapters.
3.02	December 6, 2010	<ul style="list-style-type: none"> POOL32Sxf binary encoding was incorrect for individual instruction description pages.
3.03	December 10, 2010	<ul style="list-style-type: none"> microMIPS AFP versions security reclassification.
3.04	March 21, 2011	<ul style="list-style-type: none"> RSQRT/RECIP does not need 64-bit FPU. MADD.fmt/NMADD.fmt/MSUB.fmt/NMSUB.fmt psuedo-code was incorrect for PS format check.
3.05	April 4, 2011	<ul style="list-style-type: none"> The text description was incorrect for the offset sizes for these instructions - CACHE, LDC2, LL, LWC2, LWL, LWR, PREF, SDC2, SWL, SWR. CACHE & WAIT instruction descriptions were using the wrong instruction bit numbers. LWU was incorrectly included int the microMIPS32 version.
3.06	October 17, 2012	<ul style="list-style-type: none"> CVT.D.fmt and CVT.S.fmt were in wrong positions within Table POOL32Fxf.
3.07	October 26, 2012	<ul style="list-style-type: none"> Fix Figure 6.1 - columns & rows were transposed from the real tables.
5.00	December 14, 2012	<ul style="list-style-type: none"> Some of the microMIPS instructions were not listed in alphabetical order. Fixed. No content change. R5 changes: DSP and MT ASEs -> Modules NMADD.fmt, NMSUB.fmt - for IEEE2008 negate portion is arithmetic.

Revision	Date	Description
5.01	December 16, 2012	<ul style="list-style-type: none">• No technical context change:• Update cover with microMIPS logo• Update copyright text.• Update pdf filename.